

# JOURNAL

ROYAL ARCHITECTURAL INSTITUTE OF CANADA

VOL. 25  
TORONTO  
DECEMBER  
1948  
No. 12





● ARCHITECT

● HEATING CONTRACTOR

● BUILDER





● ENGINEER

*Experts*

★ SATISFIED USERS

**AGREE ON TRANE**

**TRANE CONVECTOR-RADIATORS** for home, office, school, apartment and hospital.



**TRANE UNIT HEATERS** offer horizontal and vertical air flow for industrial and mercantile applications.

ASK the men who know heating...architects...engineers...heating contractors—the men who specify and install heating systems in homes, offices, apartments, hospitals, stores, factories—and, *satisfied users*—the men who pay the heating costs! These men agree on Trane. They like Trane service which aids in the proper selection of equipment and helps insure correct installation. They like Trane Convector-radiators for hot water or steam heating systems, scientifically engineered and proved by more than 20 years in actual operation—now mass-produced and available for low-cost installation in homes across Canada. These men also endorse Trane Unit Heaters, Canada's popular, universally accepted method of industrial heating.

Agree with the experts. Specify Trane and be sure of the result desired—cost-reducing operation and trouble-free satisfaction. Write today, for information to the address below.

**TRANE**—*The name in heating*

*Specify*  
**TRANE**

PRODUCTS ENGINEERED, PRODUCED AND BACKED BY  
**TRANE COMPANY OF CANADA, LIMITED**  
4 MOWAT AVE.  TORONTO, ONTARIO  
CANADA'S LARGEST MANUFACTURER OF EXTENDED HEAT TRANSFER SURFACE

BRANCHES ACROSS CANADA

FOR FURTHER INFORMATION WRITE TO ADDRESS ABOVE

R10



# JOURNAL

ROYAL ARCHITECTURAL INSTITUTE OF CANADA

Serial No. 280

TORONTO, DECEMBER, 1948

Vol. No. 25, No. 12

PRESIDENT . . . . . A. J. HAZELGROVE (F)

## C O N T E N T S

EDITORIAL, F. Bruce Brown, Chairman, Editorial Board	- - 434
TWELVE YEARS IN BRITAIN, S. T. J. Fryer	- - - - 435
GORDON RIVER TOWNSITE, Robert R. McKee, Architect	- - 440
ILLUSTRATIONS	- - - - - 441
THE MANUFACTURE OF VENEER AND PLYWOOD, W. E. Wakefield	- - - - - 450
THE INSTITUTE PAGE	- - - - - 458
ONTARIO ASSOCIATION OF ARCHITECTS 1949 CONVENTION AND ANNUAL MEETING	- - - - - 460
INDEX TO VOLUME 25	- - - - - 463

THE INSTITUTE DOES NOT HOLD ITSELF RESPONSIBLE  
FOR THE OPINIONS EXPRESSED BY CONTRIBUTORS

---

### EDITORIAL BOARD

F. BRUCE BROWN, CHAIRMAN

ERIC R. ARTHUR (F), EDITOR

H. K. BLACK, Regina; RICHARD E. BOLTON, Montreal; C. S. BURGESS (F), Edmonton; A. H. EADIE, Toronto;  
GLADSTONE EVANS, Toronto; LESLIE R. FAIRN (F), Wolfville; GORDON FOWLER, Toronto; ARTHUR KEITH, Toronto;  
FRED S. LASSERRE, Vancouver; EARLE C. MORGAN, Toronto; H. CLAIRE MOTT (F), Saint John; JAS. A. MURRAY,  
Toronto; H. E. MURTON, Hamilton; FORSEY PAGE (F), Toronto; JOHN B. PARKIN, Toronto; J. A. RUSSELL, Winnipeg;  
W. A. SALTER, St. Catharines; ROBT. M. WILKINSON, Toronto

J. F. SULLIVAN, PUBLISHER

Editorial and Advertising Offices - - - - - 57 Queen Street West, Toronto 1

---

### SUBSCRIPTION RATES

Canada and Newfoundland—Three Dollars per year. Great Britain, British Possessions, United States and Mexico—Five Dollars per year. All Other Countries—Six Dollars per year. Single Copies—Canada 50 Cents; Other Countries 75 Cents.



HOPE of international co-operation between East and West was at a low ebb at this season last year. In fact, a tug-of-war was taking place to determine on which side the smaller powers would range themselves. During 1948 the rivalry has accelerated. Failure to agree on matters of international policy is no longer simply deplored. The situation has deteriorated to such an extent that the existence of a cold war is freely acknowledged, stock piling is under way, and re-armament is considered a reasonable precaution. Establishment of the Marshall Plan and the Cominform precipitated a train of events including the Communist Coup in Czechoslovakia, the formation of the Five Power Pact, Communist tests of strength in Italy and France, the union of the Western Occupation Zones of Germany, and most serious of all, the Berlin Blockade which has hastened negotiations for the proposed Atlantic Alliance.

A GREAT deal is heard about the air lift to Berlin, how British and American pilots, who a few short years ago risked their lives to complete its destruction, are at present risking their lives in a determined effort to insure its survival. Whether successful or not in its primary objective, the air lift to Berlin has demonstrated to all, and especially to the Germans, the extent to which the western powers are prepared to go to fulfil their humane responsibilities. At this season of Good Will, the full force of this demonstration will surely burn itself deeply into the consciousness of millions of Europeans. May it not be that this by-product of the air lift will prove, in the years to come, to have been a more compelling influence for good, than the product itself?

CAROL singing this Christmas will have a greater significance than usual. Mention of the manger theme will wing thoughts to a crib overseas where, we rejoice to know, "A Prince is Born". Once again, in spite of trials and tribulations, the "Old Country" has briefly focussed attention upon the tremendous worth of simple values.

THE year 1948 is not distinguished by being more considerate of forecasts than other years. Demand is still greater than supply for a number of strategic building materials, nor can one discern any prospect of immediate improvement for some. The promised recession, if it has occurred, has been scarcely perceptible to Architects. The physical volume of building as well as the dollar value exceeds the peak of last year. This is a welcome fact, particularly for the large number in the graduating classes of the Schools of Architecture.

TO all our readers, to all our advertisers, and to all our staff, we extend cordial season's greetings. In doing so, may we single out for special mention and congratulations, Professor Madill, his staff, and students of the School of Architecture at the University of Toronto, as they celebrate their first Christmas in their new independent status.

*F. Bruce Brown, Chairman,  
Editorial Board.*



# TWELVE YEARS IN BRITAIN

By S. T. J. FRYER

*Old London's time encrusted walls  
What man has fashioned for us, falls,  
What God has breathed into us stands.*

THESE lines of A. A. Milne come to mind when I am asked to write of Building In England and some of my experiences there during the last 12 years, for so much that Architects and Builders had fashioned I saw fall. So much of my work during five and one half years was with bomb blasted buildings in various parts of the country.

But London, or for that matter Britain, in the summer of 1936 when we landed would not have inspired Milne to the last two lines, it had not found its soul then as it did in the summer of 1940.

To Canadian eyes and ears in those uneasy appeasing years the emphasis seemed all on the "time encrusted walls", on tradition, overdone tradition, to such an extent one came to the conclusion these people were Ancestor worshippers first and anything else second.

In spite, however, of the die hard traditionalists, much new building was going up as the depression years of the twenties were being left behind. The present trend of mass and balance without symmetry was becoming more and more evident with its related details of glass and glass bricks, chrome plating, staybrite steel, plywood and strong colours in paint. Central Heat becoming more generally accepted in the larger buildings, Radiant Heat also in some. Plumbing beginning to improve in newer installations, copper pipe being used more frequently. Ribbon building, that curse to the Town and Country Planner, was unrolling for miles and miles on each side along the new Arterial Highways, Factories and small housing both adding their ugly quota to the landscape.

The flimsy semi-detached houses in their thousands were deadly in their red brick and red tile monotony. Internally hopelessly lacking in what we would consider normal modern amenities.

Your average Englishman then, and still, has a stubborn prejudice against central heat in his home. He seems to get a morbid pleasure out of being cold!

We discovered in those early years that every British building worker, yes, even the Painter carried a cold chisel, this he used continually, he at least "sounded" busy. I started spelling it London!

It may be of interest to mention the number of streamlined and attractive, yes, I think attractive is the right word, Hotels and Pubs being built then. Architects made the most of the opportunities in designing large airy Lounges, Buffets and other modern features to be in

keeping with the respectable citizens and their equally respectable wives and sweethearts who came to sit, sup, discourse, debate and enjoy what is a pleasant social custom in England. In studying this phase of English life we found that in addition to Ye Olde Cheshire Cheese, Dirty Dicks and Regent Palace Hotel there are over 5000 such places in the County of London catering to the eight and one-half million population.

They are of all types and vintages, many worth study from the architectural angle, apart from anything else. During and since the war, I learned much of the Real England listening to and chatting with the locals in these Hotels, Inns, and Pubs, more particularly outside London, in the quiet places, the country villages and small market towns; there one sensed the England which is still a moral force in an unhappy world and because it is still a moral force will regain material strength.

Looking back, those were ominously quiet days, the lull before the storm though a domestic and imperial storm of first magnitude broke suddenly in the Abdication. I was then in the office of Sir James West, F.R.I.B.A., Chief Architect H. M. Office of works. At the time we were just getting busy on Plans for the coming Coronation. A group of some fourteen of us under direct supervision of Mr. Charles Mole, F.R.I.B.A. (now Sir Charles Mole) and Mr. C. Terry Pledge, A.R.I.B.A. designer were responsible for the Planning of the temporary Royal Annex at the West end of Westminster Abbey. All the work in the Abbey, the stands and decorations in Parliament Square, along the Mall to Buckingham Palace, and up Constitution Hill; in addition, decorations for every Government Building in Great Britain and Northern Ireland.

The Abdication staggered Britain owing to the complete censorship on what was later discovered to be common gossip abroad. During all the heat and bitterness we went diligently ahead with the Plans. One change made after the Abdication was to substitute H. M. George VI on the titles where the earlier Plans which were already out read, H. M. King Edward VIII. These earlier Plans were not changed, a bit of architectural history, on the assumption possibly that The King is dead, Long live the King.

Among the group were two young women architects and two Canadians, myself and Stanley Blackmore, A.R.I.B.A. a then recent graduate of Manitoba University under Professor Osborne. Blackmore is now an Assistant Architect in The Ministry of Works, Newcastle-on-Tyne. Of the many unusual and interesting jobs in a long and varied experience, this to me was one of the most unique and is a story in itself.



The Coronation with all its superb pageantry and color became history, and the office was busy on Wind Tunnels for the Government Research Laboratories at Twickenham and on two large Naval Training Establishments, in the West and in Scotland, the swimming pools being of reinforced concrete designed in the elliptical arch trend then coming in. Munich and the year of breathing space slipped by, September 3rd., 1939 arrived. At 11:30 a.m. the Air Raid sirens got their first full scale test—a false alarm but for 15 minutes London was completely jolted out of its sedate calm. "Moaning Minnie" the siren was to be heard hundreds and hundreds of times in the next five years till the Flying Bombs and Rockets made it superfluous. The "Alert" and "All Clear" became part of a fantastic and horribly long drawn out nightmare.

That first night the lights all over Britain were "Blacked Out"; they have not all come back yet. Neon signs and shop lighting still being forbidden. All names of places were taken down or painted out. All business or other signs which incorporated the name of the town or place were blotted out. Railway Stations lost their identities. All sign posts on the roads disappeared. Concrete pill boxes and anti-tank road blocks took their place. Immediately war came all normal architectural work stopped and came off the boards.

The War Office, Woolwich Arsenal, piled in six or seven top priority rush orders for temporary ordnance factories, the sites of these, in different parts of the country comprised from 1,000 to 1,500 acres each. As the work progressed, came Dunkirk and the threat of invasion. To the First Canadian Division was delegated the post of honour guarding the S.E. invasion coast, then the Battle of Britain and the Blitz on London broke. It is very difficult to write of those tense days and unutterably wearying nights, so many memories flood back. After the first week, few in the Drafting Office bothered to go to the Air Raid Shelter in the basement of our nine storey Office Building, close to Thames House and Lambeth Bridge. Draftsmen and Draftswomen stayed on their boards even with air fights going on right overhead. After dark, many of us carried on all through the night on "Home Guard" and other duties.

From the roof I have watched and later reported up to fifteen large fires breaking out all round, the bombers droning in through the patterned sky of weaving search-lights, machines glistening silver white in a cone of lights with the orange flashes of bursting shells around them. With the morning, wearily trying to find a place to get some breakfast in, only to discover the electric, gas and water mains had all been knocked out temporarily. The ordeal of the Blitz lasted ninety days and ninety nights without cease, bombs and fires destroyed much that men had fashioned, much of history in stone and timber and perhaps more important than these, thousands of humble homes, as A. A. Milne further speaks:

*"In broken homes we set our feet  
And raise proud heads that all may see  
Immortal in each little street  
The soul and its integrity."*

Yes, there was much of that quiet courage among the ordinary folk such as the housewives I saw one morning in Brixton brushing the broken glass off the front steps and walks of their small houses shortly after bombs had exploded in the immediate neighbourhood or the Policeman quietly saying, "Sorry I'll have to ask you to move along, you know there's a raid still on" . . . That was at midnight in Streatham, a few of us had stopped for some moments to watch the firemen getting after a bomb blaze in a Timber Merchant's Yard.

The people were discovering, as Winston Churchill said in a later and inspired broadcast, that —

"the destiny of mankind is not decided by material computation."

It was a chastening experience for an Architect or a Traditionalist to see how little, in the face of mortal peril, the buildings men had fashioned with great care, mattered, the people were not greatly disturbed by the bomb damage to St. Paul's, the Houses of Parliament and such like. Air Raid shelters were more important.

One felt some regret, however, that while this wrecking was going on, more of the really ugly edifices did not get blotted out. It is with regret, for instance, one has to inform Professor Arthur that Regent Quadrant did not receive any appreciable damage, it still flaunts its ostentatious façade!

I remember he once hoped something might happen to it. Savile Row just behind Regent Street, however, got what may have been near misses intended for the quadrant. It was blocked with rubble twenty feet high when I saw it shortly after.

In inspecting bombed and burned out buildings it was noted how, so often the cast iron columns remained apparently undamaged by fire and water while the mild steel beams and columns twisted and bent like candles on a hot day. Reinforced concrete stood up reasonably well to even direct hits from medium sized bombs. Sheet metal doors were of no use against bomb splinters or blast. Brick blast walls in front being necessary though even they not always proof against blast or suction twisting the door.

Waterproof paper was found useful on the ground before pouring concrete floor slab, enabled the shelter to be pushed along by blast instead of being crumpled. I saw shelter pushed three feet in this way without external damage to speak of.

So London endured till late October when the raids eased off a bit for awhile. In late November I was transferred to Newcastle-on-Tyne. The newly created Civil Building Control was just beginning to function. Regional Licensing Officers were appointed and Archi-



technicians as Technical Officers were attached to advise and suggest on the essentiality of the Building projects and materials proposed. Particularly the essentiality to the War effort.

Newcastle-on-Tyne was headquarters for No. 1 or Northern Region, the country being divided into seven Regions.

During the earlier war years there were five Technical Officers, later cut to two, then for three years, one was left alone to hold the fort, till a young colleague, Captain W. M. Dobson returned from the 8th Army to assist during the last year and to carry on the gradual winding up, after my resignation. He and I got some satisfaction out of our work, for as Architects we could see the beginning of the end of the irksome but for the time being necessary controls.

Under Civil Building Control, practising Architects and Builders had to apply for a License to build anything costing more than \$500.00. In addition they had to apply for permits for practically all or any materials. The office of Works became The Ministry of Works.

To give some idea of the scale of the work. When I found myself on Tyneside the first applications were coming in. When I left some seven years later, over 56,000 applications were on file in the Registry – not all of them approved, of course.

During those years I personally visited over 1,800 jobs in all parts of the North from Berwick on Tweed to Scarborough and across the country from Carlisle to below Windermere.

I soon found the human element could not be divorced from the work and two directives out of the scores that came up from London were my principal guides. One coming at the end of a long screed of stilted civil service verbosity said "however in all cases a common sense point of view should be taken," the other said "at all times the question of civilian morale should be borne in mind," these plus discretion in stepping over, under or around red tape, when it was honestly justified were sufficient in the great majority of cases.

Temporary repairs after Air Raid damage comprised a considerable portion of our work in the earlier war years when Raids were fairly numerous and some severe. Though Newcastle received its quota it was more fortunate than Sunderland, Middlesbrough, North and South Shields and the seven miles of river to the sea from Newcastle generally known as Tyneside. Most of the towns in the North-East of England received some damage from intermittent bombing. One odd episode remembered is, the night most of the windows in the residence where I and several others had rooms were blown out. Blinds and "blackout" curtains coming down. Next morning when sorting things out I found the dark green roller blinds from my windows had stamped on the roller, "Made in Hamilton, Canada." Six years later I am writing this in Hamilton, Canada, the Hamilton I first knew in 1911.

There are many human incidents and cases one could mention but space does not permit.

A certain amount of new work was licensed, work that was essential to the war effort, also a lot of repair work to ship building yards, Engineering Works, etc. Work that had to be carried out without stopping, the twenty-four hour per day continuous drive. And this effort was being carried out in all places under "blackout" conditions, no light could be shown, at night and so no air or ventilation in the normal way or sun in the daytime. It impressed one deeply many times the dogged spirit with which men and women carried on under these conditions.

On visits to London one got caught up in later full scale raids. When Rocket batteries in Kensington Gardens and AA Guns in Hyde Park plus hundreds of others blasted the sky, while strings of bombs and incendiaries further blasted "London, Arf the Bloody World" as the Cockney put it. They put a bomb into the subway under Trafalgar Square, 30 feet from Nelson atop his column. Nelson ignored it or turned his blind eye, two of the lions shook themselves back nine inches and that was that.

The Headquarters of the Ministry of Works in Westminster got the back lash from two near misses. Blueprints stamped "secret and confidential" were scattered among the debris on the street.

Around St. Paul's the night after the Fire Blitz, I felt my way over debris and fire hoses and streets running with water, all around St. Paul's buildings still fitfully blazing, or smouldering shells. Outwardly not much to show of the damage to the Cathedral, but through the drifting smoke one saw still bravely shining the many coloured electric lights on the giant Christmas tree in the great West Portico, symbolic of the London that God had breathed into.

I felt my way back in the blackout down Ludgate Hill along Fleet Street, pausing a few moments with a knot of dark figures to watch Firemen fighting the fire in the belfry of St. Brides Church, then on past the Law Courts with the bombed and burned out shell of Wren's Church opposite, a little further on Bush House with one side torn open and at Waterloo Bridge a gaping 20 foot deep crater and a tangle of wires, pipes, sewers, etc. So along the Strand with dark figures feeling their way to the Tube shelters and somewhere in the blackness a cheery Cockney voice calling "late night final."

An eerie experience was to come into King's Cross station from the north in the middle of a raid and find two young girl ticket collectors at the barrier, cool and calm, while 700-odd passengers, men, women and children, slowly felt their way through. Not many weeks before, King's Cross had collected a direct hit on No. 8 platform.

Going north on one occasion I passed through York the day after the so-called Baedeker Raid, the station was partly destroyed, the railway sidings damaged and near misses had destroyed a number of houses close to the tracks. Later visits showed that only one church out



of the many there was hit but about six pubs were knocked out and some damage to military establishments. The Cathedral was not touched. York is a Garrison City with a large permanent Barracks just as is Canterbury and Norwich, all those cities at the time were full of troops, all Britain was full of Navy, Army and Air Force men and women.

The first sight of Flying Bombs, Buzz Bombs, Doodle Bugs, they were called all these and more, was outside my Hotel in South Kensington. A dozen driving over inside 15 minutes and crash diving in the neighbourhood and beyond. The Albert Hall was damaged but not the Albert Memorial! On another occasion when passing out of Victoria Station one of them dived onto No. 1 platform. The station with its half-mile long platforms lost much of the blacked out roof glazing while windows by the score came crashing out in all directions. Flying bombs and Rockets after five years of ordinary bombs were almost more than the people could stand, coming over at all hours of the night and day, when streets were crowded and shops and offices busy.

As the sounds of war petered out, in the first flush of the spurious victory as we now find; a tremendous surge of new building developed. Houses, permanent and pre-fabricated, factory buildings of many types, new farm buildings, shipyard expansions. Getting rid of "Black-out" precautions, tearing down anti-invasion and other protections, de-requisitioning of thousands of Hotels, large residences, etc., taken over by the armed services meant a tremendous amount of repair and renewal work from the rough and ready way in which they'd been treated by hob nailed Army boots and their wearers!

Millions of square yards of glazing had to be stripped of blackout paint or corrugated iron, etc. Millions of square feet of glazing and other repairs were urgently necessary in the south-east and London area as a result of the Flying Bombs and Rockets. Production of materials could not keep up with the demand till factories had time to switch over from the long years of war production. Shipping was not available for bringing in sufficient timber, home grown timber had pretty well all been cut during the war.

A particularly severe winter crippled for some weeks, brick and cement production owing to difficulty in transporting coal. The government called for volunteers to help the regular staffs keep the railways clear of snow; thousands responded and spent their week ends working night and day. That passed, production of building materials and manufactured building fittings, fixtures, etc., increased.

Permanent and pre-fabricated houses were being completed in greater quantity. New factories on the large Trading Estates came more and more into operation.

To me, as an Architect, the Trading Estates and pre-fabricated houses were two of the most interesting developments. The pre-fab. house is based on Canadian and U.S. planning and amenities. The earlier ones being

clothed in corrugated asbestos cement sheeted roofs and walls, later types being of aluminium, painted externally in various combinations of colour, whereas the asbestos cement is left in its drab greyness, though doors and windows are in bright colours.

The aluminium pre-fab. is the best I think. It is really a permanent pre-fab., well-planned and designed and completely assembled in the factory, comes in four sections, taken to the site on four flat motor trucks in convoy, swung into position on the foundation and bolted together in about an hour when Mr. and Mrs. can move the furniture in.

The Government sponsored Trading Estates established to provide diversified employment in what had been depressed areas before the War, came along with plans for scores of new Factories. In the North these estates were developing at Whitehaven, Aspatria, Sellafield in Cumberland and Westmoreland, at Blyth in Northumberland, at Gateshead, Jarrow, Sunderland, Hartlepool and Sherburn in Durham County.

At Gateshead for instance, some 160 factories have already been built or building, most of them in operation. The estates are comprehensively planned with wide roads, grass, trees, shrubs and flower beds between road and sidewalk. Factories are set back, in many cases, lawns, flowers and shrubs laid out in front. Care of this landscaping is under the Estates Manager.

Design of Factories is given to practising Architects and kept at a high level. The standard factories range from 6,000 square feet costing \$30,000. to 20,000 feet costing \$100,000. A number of others much larger are also being erected costing from \$250,000 to \$1,000,000.

The Jarrow Estate down the River Tyne, once a scene of dejected desolation will eventually be tied up with careful landscaping to the old Abbey Church established by the Venerable Bede, 900-odd years ago. It took a year to clear and level the site.

These Trading Estates are a real effort to abolish industrial slums, to bring employment to where the people live, to decentralize from the great sprawling conglomerations of cities.

In addition, quite a number of new Factories are being created by private capital, one really fine comprehensive scheme nearing completion at Darlington is costing \$9,000,000. It includes all modern recreational, feeding, training, first aid, and other facilities for employees. Painting of interiors and machinery being specially studied in the bright and variegated colours now found to improve production. A world known cigarette and tobacco firm is putting up a \$2,000,000. cigarette plant in Newcastle. At West Chirton, between Newcastle and Tynemouth. A number of large modern factories and the necessary housing are under construction.

Imperial Chemical Industries have under way a project to cost \$75,000,000., a new Plastics Division at Wilton Castle near Middlesborough. The old Castle, grounds, parkland and village will be undisturbed and retained



as a convalescent rest area, while adjoining, a carefully town planned community of houses, etc., and the Factory group are growing amid trees and country lanes.

This spate of building is not peculiar to the North of England where I was but covers the country.

Controls on materials and licenses are easing as materials slowly become more plentiful. Steel when I left was the difficult item to obtain.

Eighteen months ago, of a list of 100 controlled materials and manufactured building goods, some 75 per cent were decontrolled.

House building, that is low cost and low rental, is now controlled by the municipalities. These houses, generally semi-detached, do not contain more than 1,000 square feet and cost not more than \$5,200. Builders can erect for sale one house for every four they build for rent.

In certain cases houses for key Executives can run to 1,500 square feet at a cost of \$9,500. but no luxury house building or luxury building of any kind is licensed for the time being, not until essentials have been taken care of.

Late in March I said goodbye to Tyneside and the North with its forthright folk who build ships and go down to the sea in them; who dig coal, make steel and iron, build heavy electrical equipment, make glass and paper; throughout the war all their paper was made from straw, could not get pulpwood. They farm right up to the coal Pit-heads, they fish. Newcastle is the original home of the lowly Kipper!

Then to London again for the last week before making a most comfortable and interesting fly over in the friendly care of T.C.A.

London was beginning to look a little less tired and untidy, getting spruced up with paint and soap and water, though many gaping spaces show wild flowers and even small trees growing among what were once basements and cellars. Shops, offices and houses are still boarded up waiting for glass and other repairs.

St. Paul's is being repaired, festoons of new carving standing out sharp and clear in contrast against the smoke-grimed worn carving which escaped damage. This modern carving is equally as fine as the original of Wren's time.

For nearly a year pneumatic drills have been working on the new Government Building in Whitehall between Northumberland Ave. and Scotland Yard. They are try-

ing to get rid of seven feet of heavily reinforced concrete wartime protection over one portion of Ground Floor slab. They were still at it when I left!

However, the showpiece of wartime Architecture in my opinion, will, I imagine, stay where it is for many, many years. It's the Admiralty Citadel by Horse Guards Parade with eight-foot-thick massive reinforced concrete walls and roof. As Architecture, or perhaps more properly, Engineering Architecture, it's good, looking what it's intended to be. Virginia Creeper and ivy are beginning to soften its sombre mass.

On Easter Sunday I said good-bye to a country that has seen much, done much, given much and endured much through the centuries. Today, in the slow, sometimes irritating English way it is working itself out of present grim difficulties. It has been through worse. It is starting to build anew in a big way, towns, improving farms and building better farm workers' homes, getting rid of country slums, establishing better factories and working conditions and new schools so that coming generations can learn and live a fuller life. Time will be needed, there is so much musty mouldy dead wood and stone to clear, wood and stone whose only claim is age. Prejudice has also to be overcome.

They are a stubborn people, a paradox of sentimentalists reluctantly going forward with ever a lingering glance back at the past, but politically adult, and forward thinking as free people, setting the pattern for many others. Their heritage of the sea and world trade prevents them from becoming, as a people, narrow-minded or parochial in their outlook on the world.

In 1849 Disraeli declared "in industry, commerce and agriculture there is no hope." In my humble opinion that is no more true than when "Dizzy" moaned it; for Britain is struggling to its feet again, refined in the furnace of War. Her spirit was not and is not cowed, and with the spirit there is always hope. They are trying to live up to the words inscribed in one of their churches —

*Isn't it strange that Princes and Kings,  
And clowns that caper in sawdust rings,  
And ordinary folk like you and me,  
Are builders of Eternity.*

\* \* \* \* \*

*To each is given a bag of tools,  
An hour glass and a book of rules,  
And each must build ere his time has flown,  
A stumbling block or a stepping stone.*



# GORDON RIVER TOWNSITE

## GORDON RIVER, BRITISH COLUMBIA

A RAILROAD LOGGING TOWN OWNED AND OPERATED BY THE KOERNER INTERESTS

By ROBERT R. McKEE, *Architect*

### Location

20 miles north of Cowichan Lake on the west coast of Vancouver Island.

12 miles inland by rail extension from the Island E. & N. line.

### Site Allotment

Approximately 30 acres of land cleared of virgin timber. The site rests in the fork of two small rivers. The site was chosen by the Company for the following reasons:

1. Close proximity to area to be logged (30 billion feet of timber).
2. Close proximity to fresh water.
3. Easy access by train.

### Original Requirements

1. To house approximately 40 married families.
2. To house approximately 400 single workers.
3. To provide services of power, water, sewerage and heating facilities.
4. To provide recreational facilities.

### Factors Involved

1. **PSYCHOLOGICAL**  
The remote location required a better-than-average solution to keep labour turnover at a minimum.
2. **PHYSICAL**  
Ground was bulldozed flat and completely cleared of any form of vegetation or trees of any kind, before the Architect was consulted.
3. **ARCHITECTURAL**
  - (a) Cost had to be kept at an absolute minimum.
  - (b) The Company originally planned on a huge H type of bunkhouse to accommodate all labour — this to be served by an adjoining cookhouse.
  - (c) Company Woods Superintendents were not anxious to depart from the accepted design for bunkhouse accommodation.
  - (d) Planning decisions were allocated to two Company officials—a chemical and a forestry engineer. Architect's appeals for arbitration were frequently made to the Company directorate.
  - (e) The Company are shingle manufacturers. Flat roofs were sold to them by calculating the actual cost of the flat compared with pitch roof. The flat was proven to be considerably cheaper and was, therefore, used.
  - (f) Function of the Townsite necessitated placing of the cookhouse as centrally as possible.
  - (g) Houses were made on a timber cradle, so that they might be split and moved to a new location.

### Approach and Solution

#### A. BUNKHOUSES

The greatest difficulty lay in the design of individual units and particularly bunkhouses. Firstly, the idea of the H. bunkhouse was vigorously attacked. The Architect felt that, if possible, as much individual privacy as possible should be given the workers. It was eventually decided, therefore, to break the large H unit into smaller 16-man units divided as shown with eight men in each wing and two men to a room. Also, it was felt that more light and air should be provided to living rooms in order to prevent the usual stale atmosphere prevalent in most coastal camps, including the U.S.A. This was achieved by running stock size strip windows wherever possible. The bunkhouses were planned using the centralization of plumbing as a basic factor. The drying and laundry room was, therefore, backed to the washroom. Four rooms were placed either side of this centre or core to provide ease of circulation to washrooms and also provide additional privacy between groups. It will also be noticed that a lounge and card room is provided for each eight men.

#### B. DUPLEXES

The original plan was to build individual houses. However, it was proven that a saving could be effected by building a common wall and joining the houses. It was also possible to combine garages into units of two and thereby save.

#### C. COOKHOUSE

The original plan was to have a standard cookhouse layout. This was changed to cafeteria style as shown. Triangular trusses were used in the dining room in order to take advantage of a spectacular view of rugged mountain peaks which form a permanent picture in the frame of the main facade windows.

#### D. OTHER BUILDINGS

The form of other buildings followed the particular function in each case.

#### E. SEWERAGE

Sewerage is handled by two large septic tanks, each of which is led into the secondary stream on the south.

#### F. WATER

Water is picked up in a concrete catch basin one and one-half miles from the site. It is run by gravity from there to the supply tank and fed by gravity to the Townsite. In case of fire auxiliary pumps would be used in the river opposite the Townsite proper.

#### G. POWER


Electrical power is supplied by Diesel.

#### H. HEAT

Arrangements were made to heat buildings in groups of three. A low pressure hot water system was used. Insulated copper lines were run between buildings and pumps installed on boilers.

J. For layout of services, roads, etc., see plot plan.



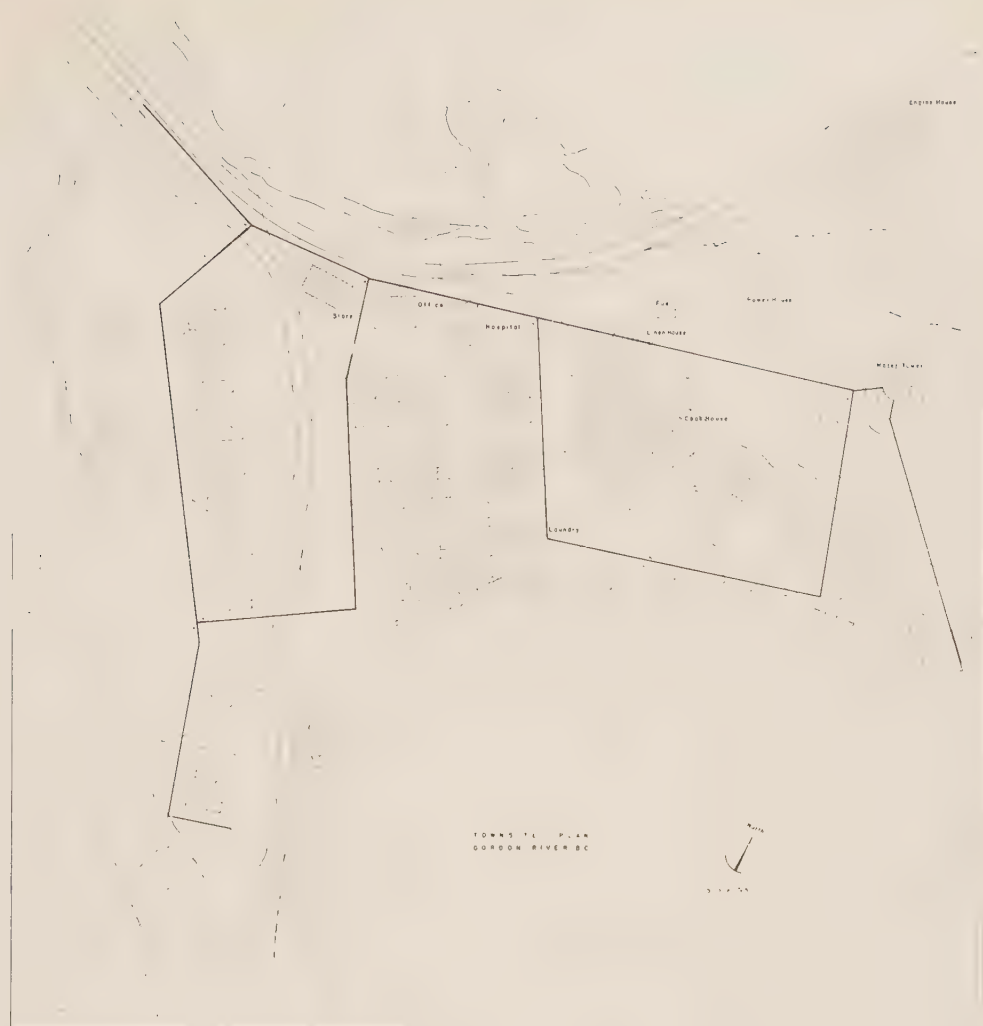


TOWNSITE PLAN

RECREATION FIELD (UNDER CLEARING)

Photographs by Graham Warrington





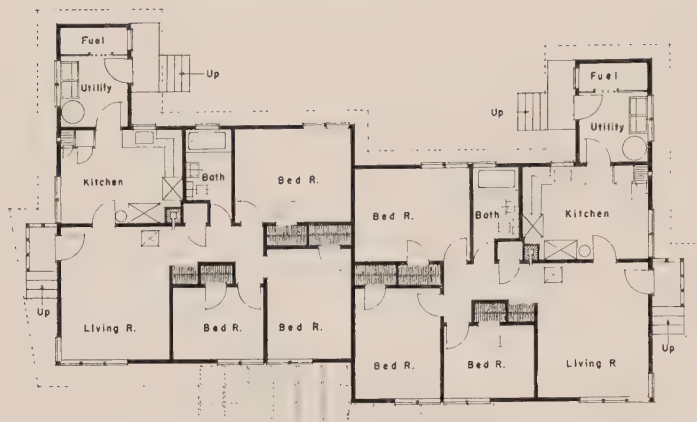

DUPLEX-1-8" = 1'-0 PLAN




HOSPITAL-1-8" = 1'-0 PLAN




ADMIN. 1-8" = 1'-0 PLAN



ADMIN. 2ND FLOOR

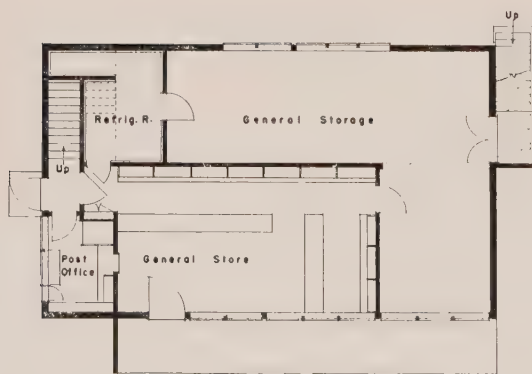

STORE-GUEST HOUSE-1-8" = 1'-0 PLAN

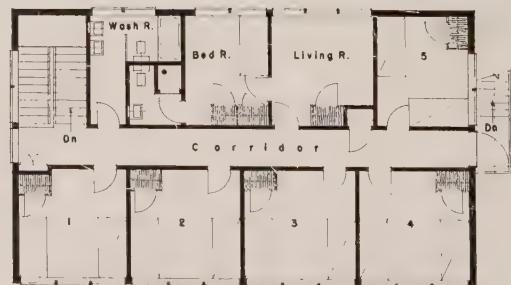

STORE 2ND FLOOR



ADMINISTRATION OFFICES,  
RAFTING AND ENGINEER'S QUARTERS



STORE AND POST OFFICE,  
GUEST ROOMS ABOVE

FIRST AID BUILDING







DUPLEX GROUP





DUPLEX LIVING ROOM



DUPLEX LIVING ROOM



ENGINEER'S ROOM





BUNKHOUSES


BUNKHOUSES, WEST SIDE







ENGINE SHED

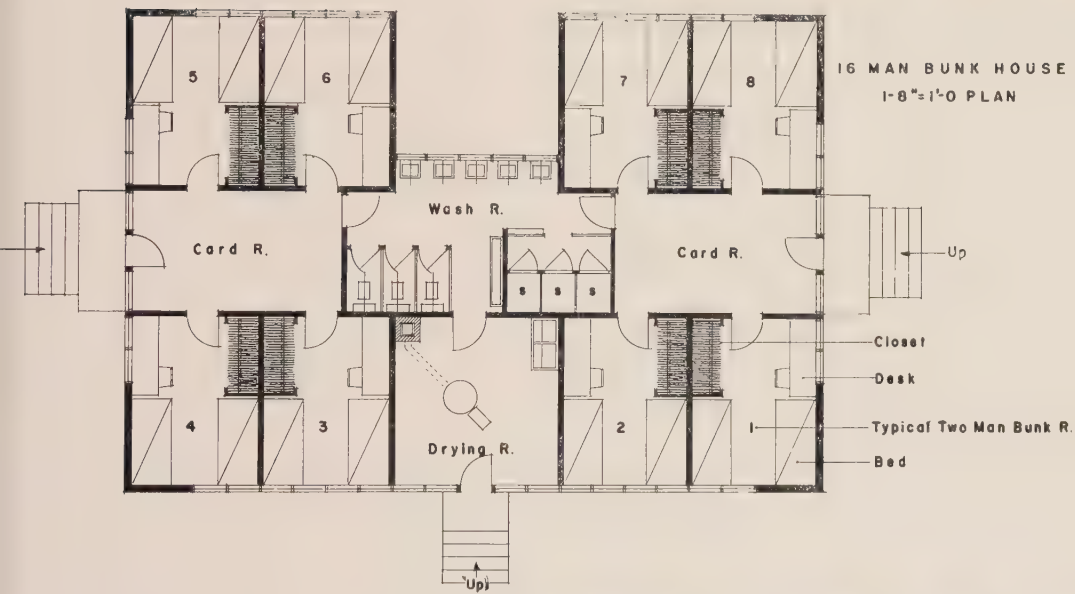


INTERIOR ENGINE SHED






COOKHOUSE ELEVATION

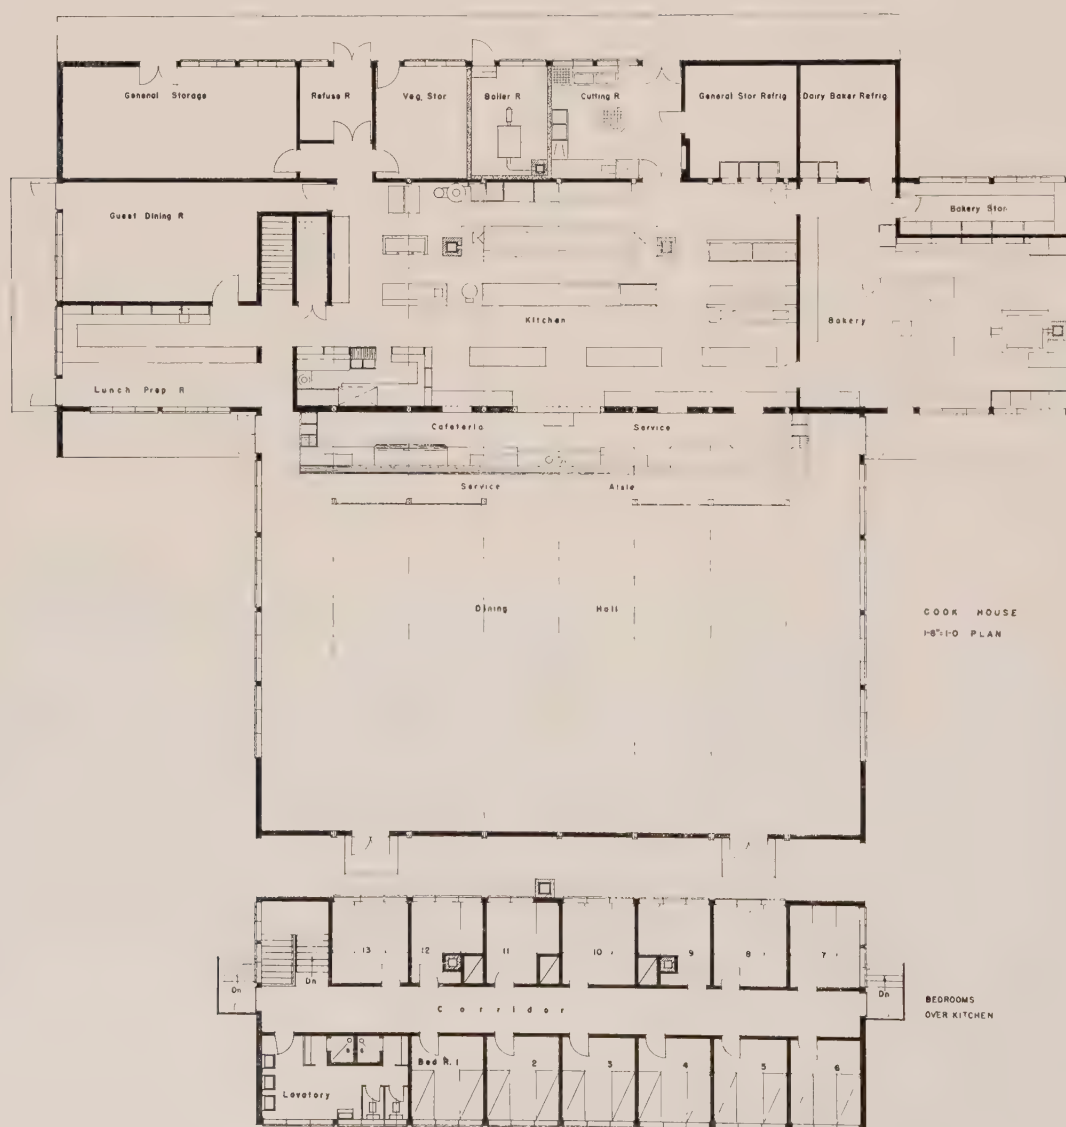

COOKHOUSE PLANS



COOKHOUSE BAKERY

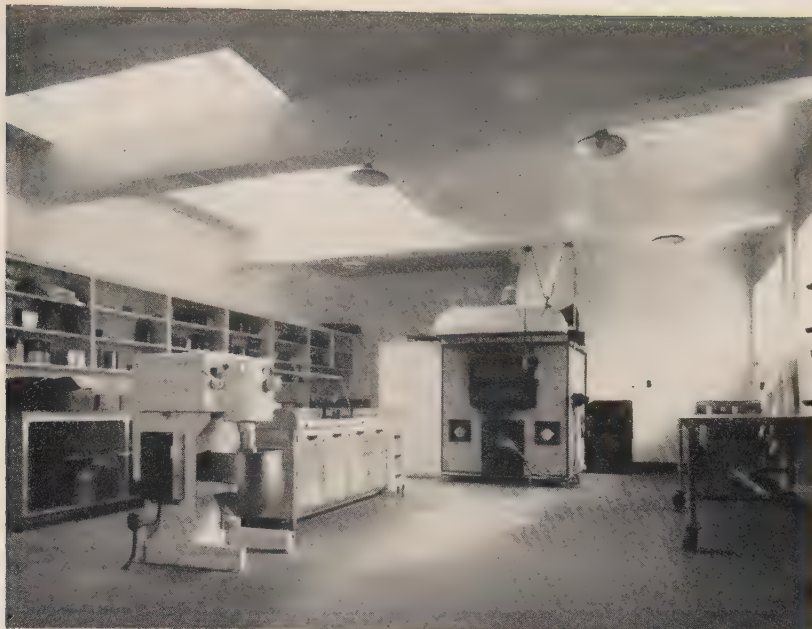

CAFETERIA  
LOOKING INTO KITCHEN



DINING ROOM  
SHOWING PIN POINT TRUSSES





# THE MANUFACTURE OF VENEER AND PLYWOOD

By WM. E. WAKEFIELD

## INTRODUCTION

Veneering is one of the oldest of the decorative arts employed in woodworking. It flourished as far back as the 15th Century B.C., and although the methods used were primitive, the results obtained were of such quality that the skill and craftsmanship of these ancient workers compare favourably with those of the producers of modern marquetry and veneer inlay.

The species generally used by the ancients for the preparation of veneers were hardwoods from Africa and the Middle East. Coffin cases, beds, benches, and stools inlaid with such woods as ebony, laburnum, and olive wood still exist as examples of these ancient handicrafts.

The principal tools used were the adze and the hand-saw, crude planes, rubbing stones, and sand. Conversion was necessarily wasteful and very laborious. All this has changed with the introduction of machinery, and today veneers are cut more economically, more uniformly, and more rapidly than was conceivable by craftsmen of only a few decades ago.

The improvement in tool steels and in the technique of wood preparation has increased the present day production of veneer enormously, but in many cases the conversion is still very wasteful. One reason, among others, is that a large percentage of the plywood manufactured during the last few years was for military purposes, and, in consequence, standards of performance were set which did not permit the use of low-grade veneer. This has meant that until recently only the choicest logs were cut, and the veneers obtained were carefully selected. Frequently veneers containing small defects were rejected although, under normal conditions, they would have made excellent industrial plywood. This has been the case more specifically in production of high-grade birch and maple plywood for aircraft construction. Closer utilization of logs and veneers may be expected as more plywood is diverted to industrial uses. Many defects which would condemn plywood for such purposes as aircraft construction are of minor importance in structural plywood. One good face, for example, is all that is required for wall panelling. Defective veneer of inferior quality may be quite satisfactory for cores and backing of such panels, permitting the utilization of a great amount of low-grade veneer which under war conditions found its way to the refuse burner.

## CONVERSION

There are two methods of producing veneer — by sawing and by shearing with a knife edge. Sawing is preferable for highly figured veneers, such as burls and crotches, as the grain of the wood is usually interlocked

to such an extent that attempts to slice it frequently cause tearing and disfigurement of the veneers. Highly decorative designs may be obtained by matching the veneers in the order in which they are separated by the saw. These matched veneers are used for the higher grades of furniture, and for the decorative panels which are found in even the medium-priced furniture produced in recent years.

Veneers obtained in this way from burls and crotches have little inherent strength and, consequently, are of no interest to the structural designer. Veneers sawed from logs with little figure, however, are very strong provided the logs are straight-grained and the strength of the species is high. Such veneers make the best material for laminated veneer construction, but are more costly, as there is a considerable amount of unavoidable waste in the saw-kerf, and also in the back-board (the portion of the log or cant held on the saw table) which cannot be effectively veneered. Special saws with very thin blades are used in this method of conversion, to reduce the kerf loss as much as possible.

Sheared veneers can be subdivided into two classes. The first class of veneers is obtained by passing the log in the direction of its long axis across a fixed knife or by passing a movable knife along the face of a fixed log. The relative motion of log and knife is the same in both cases. The knife is arranged so that the plane of the cutting edge is at an angle to the axis of the log. This causes a shearing action by the knife and facilitates cutting of frail veneers. By this method, veneers of different thicknesses may be obtained by advancing the knife a given distance toward the log at the beginning of each stroke. Veneers manufactured in this manner are limited in size by the dimensions of the face of the log being sliced. The veneers sliced from straight-grained material are strong, but cannot be cut very thick. The limit of width is usually about 30 inches, and of thickness about  $\frac{1}{4}$  inch in suitable species.

If an attempt is made to cut thicker veneers the wood will split ahead of the knife. The result will be a cloven veneer which will be full of inequalities on both faces. For some applications such inequalities are not important. For accurate dimension plywood, such variability in the veneers is undesirable, as it introduces difficult gluing problems which should be studiously avoided.

The second class of sheared veneer is obtained by rotating the log against a knife, the edge of which is parallel to the axis of the log. This knife is steadily advanced toward the log's axis by mechanical feeds which can be altered to suit the thickness of the veneer it is desired to manufacture. This type of veneer is most



commonly used in industry; it is the basis of most commercial plywood, and is known as rotary-cut or peeled veneer.

Many species can be manufactured into veneer by sawing, including such easily damaged stock as walnut burls, crotches, and butts, numerous tropical hardwoods, wavy birch, and similar species where the grain distortion is excessive. There are, however, comparatively few native species which are suitable for manufacture into veneer by the rotary cutting or peeling method. For best results, species to be rotary-cut should be as free from defects as possible. Knots may prove to be a dominant factor in preventing rotary cutting of some species, as hard knots may cause knife breakage. The knots of some species are particularly hard, and although eventually it may be possible to find a technique whereby they may be softened sufficiently to permit their being cut satisfactorily, this is not yet possible on a commercial scale.

Heart-rot may be responsible for the rejection of logs of some species, particularly if the logs are small in diameter. One of the necessary preliminary operations in rotary cutting is holding the log so that it may be rotated against the knife. This is known as dogging. The dogs or chucks of the lathe are driven into the ends of the log and, in rotating, turn the log on its axis. Considerable power has to be transmitted through this connection, and if the wood is not sound around the pith the dogs will slip when the cutting load is applied by the knife and the log will not rotate. Sometimes logs of fairly large diameter which are hollow hearted may be salvaged by using oversized dogs, but this procedure is uneconomical with small logs.

It will be understood that other defects give similarly undesirable results, so that the use of different species is governed by their peculiarities of growth, some at the present time being considered valueless for rotary cutting. However, it is probable that, with the advance in knowledge of the techniques of manufacture, methods will be found for overcoming many of the objectionable characteristics of some of the species now considered unsuitable for the manufacture of veneer.

Slicing from the log is preferably confined to the softer species, though hard species can be sliced if properly heat treated. For example, owing to the variation in structure of springwood and summerwood, Sitka spruce does not peel very well when rotary-cut, but when sliced upon its edge-grain or radial face the veneer can be used successfully, and is desirable for some specialized parts of aircraft. Slicing can be used for making veneers from pine, spruce, poplar, yellow poplar, mahogany, okume, and woods of a similar degree of hardness, and some of the harder and occasionally strongly figured species, such as walnut, maple, and elm. The bolts to be sliced must, of course, be prepared in much the same manner as those to be subjected to peeling. Some species can be cut without any preparation except barking. Others must be soaked in hot water

or steamed to soften the wood to a suitable condition for slicing, as explained later in the description of the rotary-cutting process. The temperatures and time necessary to obtain this condition vary with the species and the size of the log. Correct timing is largely a matter of experience.

Rotary cutting is by far the most important method of veneer manufacture, and following is a description of the various stages by which veneer is produced. While the description will not be given in detail, since details vary with species, the steps described give a good general picture.

First the logs to be veneered are selected on their arrival at the plywood or veneer plant. Selection is based on such qualities as straightness; freedom from knots; roundness, i.e., freedom from flats, cat faces, butt swell or other inequalities of surface; and freedom from decay or decay, hollow heart, or other apparent fungus defects. The surface is carefully examined to ensure that no nails are imbedded in the logs, as a nail may break the peeling knife and cause very considerable damage to the lathe. While nails will be found rarely in logs taken from the forest, farmers' logs may have fence staples and old spikes in the butt logs, so extra care must be taken in inspection of the log when it is known to have come from a farm woodlot.

After selection the logs must be kept wet, either by storing them in water in a log pond, or by stacking them and keeping them constantly sprayed with water, so that checking and splitting, caused by the shrinkage that takes place when wood dries, cannot occur. Keeping the logs soaked also inhibits the growth of wood-destroying fungi.

The logs, before veneering, are cut into bolts of a length equal to or less than the distance between the chucks of the lathe, depending on the requirements of the plywood that is being made. After bolting, the bark should be removed from those species not requiring heat treatment. For other species this operation is delayed until removal of the bolts from the steaming or cooking pits takes place, as this process loosens the bark and permits its removal more easily.

The softening process consists of steaming the bolts in a pit or oven, or heating them in a vat. Steaming is preferred by some operators, who claim quicker heat transfer from steam than from direct contact with hot water. Some prefer to cover the logs with sawdust during steaming. Nevertheless much of the wood veneered is prepared satisfactorily by heating in hot water. The time of this cooking or softening is usually about five or six hours, but may be as long as twenty-four hours; the longer period is generally preferred. The time of treatment, as previously mentioned, varies with species and size of log. Certain species can be veneered satisfactory without any heat treatment. Care must be taken in heating that thermal shock does not crack the log. Gradual application of heat from temperatures lower than 100-105°F. to the required temperature is generally



considered preferable to sudden immersion in high-temperature water or steam, although some operators claim that rapid heating is best.

The logs are taken from the cooking pits or vats to the peeling floor, where the bark is removed. In some plants a preliminary treatment removes the bark and rough-turns the log, with a view to removing excess material on eccentric logs and excessive log taper. The log, now roughly cylindrical, is lifted by means of a hoist and, by the use of grab hooks inserted in the end faces, is lowered into the lathe until the ends are centred with the lathe chuck-dogs. The chuck-dogs are driven into the log and the lathe knife advanced to take the initial cut as the log rotates. Spurs or spur knives are fixed ahead of the lathe knife, which can be moved in or out to regulate the length<sup>1</sup> of the sheet being cut from the log. These are necessary to ensure that doty wood, end checks, and other defects associated with the end of the log are removed as early as possible in the conversion process. The pressure bar slightly compresses the log surface immediately ahead of the knife. This assists in maintaining the gauge of the veneer and also reduces the tendency of the veneer to split. Some lathes are equipped with a roller which replaces the pressure bar, but acts in the same manner. The initial cut removes the excess material due to log taper where this has not been previously removed. The triangular pieces cut at this stage, known as fish-tails, can be used for making small plywood panels although they are frequently discarded for hogging into fuel. When the knife is cutting the full length of the log, the sheet of veneer is led out onto a castered table, and is broken off into widths<sup>1</sup> by hand. The veneer breaks easily along the grain, i.e., across the sheet. A number of widths are piled one on another until the log has become so small that further peeling is mechanically impossible, or until the operator decides that further peeling is uneconomical owing to the presence of knots, cracks, checks or other defects, which are exposed as the log is turned down. The pile of sheets is brought to the clipper where it is cut, by means of a mechanical shear, to the approximate finished size, allowance being made for the shrinkage which occurs during drying. Automatic clippers are now being used which clip out defects and cut the veneer to the required width as it leaves the lathe. An alternative method frequently used when cutting thin veneers is to roll the veneer around a drum or spool as it is peeled from the log. This reduces breakage since the veneer can be handled more carefully at the clipper, and can be cut to width without such loss as occurs when the veneer is broken by hand as it comes from the lathe. In certain plants the clipper is placed at some distance from the delivery side of the lathe. A system of conveyor belts carries the veneer, as it is peeled from the log, to the clipper. This conveyor system consists of live belts

which carry the veneer forward in continuous sheets of considerable length and deliver them as required by the operator at the clipper. As each belt is filled the veneer is broken off and the veneer coming from the lathe is directed onto another empty conveyor belt. These belts are arranged to run at different levels one above the other, and may be filled in succession so that there is slight possibility of congestion occurring at either lathe or clipper, and no delay when the lathe is idle while the core is being removed and a new log inserted. This tends to produce smoother operation of the plant.

When the first method is used the veneer is frequently broken in the centre of a stretch of clear stock which is desirable for face veneers. This causes an unnecessary loss of the more valuable veneer. The other methods tend to conserve the better quality veneer since there is less frequent breaking and more opportunity to arrange for the break to be made at some place where the quality of the veneer is low. The core remaining is removed from the lathe and is discarded for fuel-wood or is sent to the sawmill for conversion into dimension stock, railroad ties, planks for flooring, or other uses such as crating stock, depending upon its size and quality. The cores obtained from some species are suitable for conversion into pulp chips and are sent to the chipper and thence to a paper mill.

A method of veneer manufacture which may be considered as a combination of peeling and slicing is frequently employed when special figure is required from species such as oak, where radial cutting produces the most marked medullary figure and consequently more desirable decorative veneers. This is known as the stay-log method. The logs to be cut into veneers are first manufactured into cants by sawing lengthwise through the pith and re-sawing the half logs so that the best figure can be cut by the lathe. The cants are bolted with lag screws to a frame which rotates between the lathe centres. The cant is thus rotated some considerable distance off the lathe centre and either radial, diagonal, or tangential faces are presented to the knife, whichever produces the best figures, at the discretion of the lathe operator. As the cant rotates, a slice of veneer is cut each time it passes over the knife. Each sheet of veneer as it is cut is piled in the order of its production. In this way the veneers can be closely matched to produce decorative panels in the manner described under sawn veneers.

Stay-log veneering is more economical of timber than sawing, since there is practically no loss due to saw kerf, but a disproportionate amount of timber is lost in the initial trimming of the log and in the back-board which is screwed to the stay-log frame. It is usually less economical of timber than rotary-cut veneer, although this is not true of all species, since some timbers are so full of defects in the vicinity of the pith that it is not good practice to cut the core to too small a diameter. Further, in the greater thicknesses, the curvature of the veneer produced by peeling becomes so great as the core diameter is reduced that flattening and drying may cause

<sup>1</sup> It should be remembered that in the sheet of veneer coming from the lathe the grain or length of the veneer is across the sheet and that the long dimension of the sheet is actually the width of the veneer.



the face of the veneer nearest to the core to check badly, thus considerably reducing its value.

## DRYING

After clipping, the sheets of veneer are dried prior to manufacture into plywood, or, in the case of decorative veneers, before shipping to furniture manufacturers. Drying is effected by one of three methods. The cheapest but longest and least effective is by loft drying. This method is the one most commonly employed for drying the sawed or sliced burls and crotches mentioned previously, as the veneers are too fragile to be handled by the other methods. Rotary-cut veneers are rarely dried by this means, but when it is used the veneers are placed on edge in fingered racks or hung from overhead wires by means of friction clips or spring hook devices. These lofts or drying-rooms are kept at a temperature of 90° to 100°F. and are held at a relative humidity of 60 to 70 per cent. This is about the limit of heat and humidity that workmen are capable of withstanding for any length of time. Lower humidities cause crinkled stock and considerable reduction in the grade of veneer obtained. Higher humidities unnecessarily prolong the drying time, and may encourage mildew staining.

An alternative to loft drying is the method of progressive drying. This consists of piling the veneer on castered trucks or kiln cars, the sheets of veneer being separated by stickers or crossers of narrow strips of wood to permit the free circulation of air. The cars are moved progressively forward through a tunnel or drying chamber in which graduated temperature and humidity conditions are maintained.

A similar type of dryer consists of a series of chain belts which hold single sheets of the veneer flat while passing through a chamber or tunnel heated and ventilated in a manner similar to that mentioned in the preceding paragraph.

The third method is by heating the veneer between platens. Single sheets of the veneer are placed between them and dried under pressure. A more modern development of this method of drying is the progressive platen dryer in which the sheets of veneer are fed between steam-heated platens. These platens iron the veneer for a few seconds and then release it, the heat of the platens causing the escape of moisture from the veneer as steam. A series of moving rollers advances the veneer to a second set of platens, then to a third, and so on until the veneer reaches the required degree of dryness. During the drying the veneer is subjected to intermittent pressure and as a consequence is delivered both dry and flat at the end of the process. It differs from the ordinary platen dryer in that the alternate pressing and releasing cycle permits normal shrinkage to take place and prevents cracking and splitting of the veneer.

Frequently the veneer contains small defects such as resin pockets, knot holes, or bark inclusions which mar the appearance of what would otherwise be excellent

face veneer. To improve such veneers, special equipment is used which cuts out the defect and inserts and glues in position a piece of veneer matching as closely as possible the grain and colour of the veneer surrounding the defect. Such patched veneers are not generally considered suitable for a stain and varnish finish (unless the matching has been carefully carried out, as is required for certain grades of softwood and hardwood plywoods), but are acceptable for painted finishes. Lenticular cut-outs are plainly visible in the sheet in the hands of the first operator. Shaped pieces of various grains and colours are visible in tray at the head level of the second operator, who is gluing the pieces with an electrically operated shoe. Sometimes it is necessary to glue in strips of veneer to fill splits or cracks in like manner.

## EDGE JOINTING

Frequently the veneers are cut in strips which are not wide enough for the face of the finished plywood sheet. In the better grades of plywood these narrow strips are edge-glued to form sheets wide enough to make complete faces. This operation is performed by taping or by a tapeless jointer. Cores and cross-bands are frequently left unglued, but when such joints are taped the edges are brought together and a strip of thin paper tape is glued along the joint to hold the strips together during the operation of pressing. In cheaper grades of plywood the tape is left in place, as its presence has little effect on the strength of the panel. Frequently the paper tape used is punctured to permit the glue to pass through it to the core ply and thus improve what might otherwise be a doubtful joint between the face and the core.

Taping of the exterior veneers is frequently resorted to in the best grades of plywood. When the bonding adhesive is liquified during the pressing operation some of it flows between the edges of the taped veneers and, in setting, glues them firmly together. The tape is then removed by wetting.

Instead of taping, a machine called a tapeless jointer is often used. This operates as follows: two strips of veneer whose edges have been trued so that they make contact along the whole of their length when placed side by side are treated with animal glue and fed into the machine. Small wheels, which are slightly inclined in the direction of the joint, squeeze the sheets from opposite directions so that the edges are forced into close contact. A thin disc dips in a cup of formaldehyde and wets both edges before they are pressed together, and the veneers are carried along under a heated shoe which sets the glue very rapidly. An alternative method is to omit the gluing of the edges with animal glue after jointing and to substitute resin glue for the formaldehyde in the cup of the tapeless jointer. The glue is applied to the edges of the veneers by the disc which normally spreads the formaldehyde mentioned above. This resin is of the cold-setting type to which zinc stearate or some similar lubricant has been added to prevent fouling.



When heated during its passage under the shoe it sets almost instantaneously. On leaving the machine the two strips are firmly glued into one sheet and are ready for further gluing, preparatory to their inclusion in the stack of veneers to be pressed into plywood.

### PLYWOOD MANUFACTURE

Plywood consists of a number of veneers glued together under pressure. The veneers or plies are usually laid at an angle to each other so that differences in longitudinal and transverse strength may be equalized to some degree. It is usual to place the veneers at right angles to each other, i.e., the usual construction of three-ply consists of one veneer placed with its longitudinal grain at right angles to the second veneer and a third with its longitudinal grain at right angles to that of the second ply and parallel to the first. In five-ply, seven-ply, or multi-ply construction, the arrangement of the veneers is carried out in a similar manner, the longitudinal grain direction alternating in successive veneers.

In three-ply construction, if the centre ply is made equal in thickness to the combined thickness of the two outer plies (which will normally be of equal thickness) balance of construction is obtained, and the plywood will have approximately the same tensile strength in the longitudinal and transverse directions. In bending, however, the plywood is stiffer when the bending stress is applied normal to the surface and with the span length parallel to the face plies.

In plywood generally, the central ply is known as the core, and the outer plies are known as the face; where more than three plies are used, those lying between the faces and the core are designated the cross-banding.

For aircraft skins and some structural uses it is customary to make the veneers of three-ply of equal thickness. As a consequence, the plywood has directional strength, i.e., it is appreciably stronger in the direction of the face plies than in the transverse direction.

One advantage of making all three plies of equal thickness is the increase in flexibility obtained transverse to the grain of the outer plies. This increase permits the plywood to be bent to fit curved surfaces without unduly stressing the sheet, which would possibly crack if made by balanced construction.

Occasionally plywood is made by using four veneers of the same thickness. Two of these are glued together to make the core. The grain of these two veneers is parallel and the two outer face veneers are glued to them as in the production of normal plywood. While this method consumes fifty per cent more glue it is sometimes economical, as all the veneers, both faces and core, have the same thickness and, consequently, can be cut by one setting of the veneer lathe. It also economizes in storage space as one size of veneers only is stocked instead of two.

### ADHESIVES

Plywood is prepared to meet special use conditions. For interiors, protected from the elements, where there

is little change in moisture content, adhesives which have considerable strength but little water-resistance can be used satisfactorily. Where there is damp, water-resistant glues should be used, and if the plywood is to be exposed to direct contact with the weather, only waterproof glues should be used.

In the manufacture of box and crate plywood, the adhesive used is of the cheapest type. Starch glues or silicate of soda are sufficiently strong for the purpose, although starch glues have no water-resistance and break down rapidly in a damp atmosphere. Silicate of soda or water-glass is water-resistant for some time, but eventually disintegrates under oxidation by the atmosphere. Where the boxes have to meet extreme conditions of temperature and humidity, adhesives of the resinous type should be used, preferably those based on phenol or resorcinol.

For plywood panels to be used in interiors, such as panelled room or in furniture, animal glue, usually a good quality hide glue, is frequently employed. Animal glue is not waterproof, nor has it been successfully waterproofed by the addition of chemical tanning agents such as formaldehyde or chrome salts. Moreover, under the influence of dry heat it will break down or craze if its moisture content is reduced to a low level. This action is particularly apparent if low-grade bone glues are used. The use of animal glue, requiring heat for proper application and provision for cooling and drying the panels before removal from the press, is giving way to adhesives such as casein glues and extended urea and phenol-formaldehyde resins which will set with heat, permitting the removal of the panels from the press while still hot.

Casein glue is water-resistant and is used either alone or in conjunction with blood albumen for the production of fairly waterproof plywood. While water-resistant, pure casein glues are not waterproof, although some recent formulations almost deserve such a description.

Vegetable proteins manufactured from the proteinic content of oil seeds such as soy beans have been successfully prepared, and are largely used in the production of some commercial grades of plywood. Blood albumen, frequently used in Europe for plywood manufacture of good water-resistant quality, is used as an extender for these proteinic vegetable glues, and it adds considerably to the water-resistance of the plywood. It is also used in conjunction with phenol-formaldehyde resin glues, not to improve the water-resistance of the glue-line, but to reduce costs by replacing a percentage of the more expensive phenolic resin. It also assists in controlling the resin flow during the pressing operation.

Cold-setting blood glues have been prepared recently and are being used successfully for the production of plywood having considerable water resistance.

Thermosetting resin glues used in plywood manufacture are of two types. One type is a liquid suspension of resin and hardener in water, or alcohol, the other a film type in which resin and catalyst are carried by a



very fine tissue film and dried without curing. The gluing with the former type of glues may be done in one of two ways, depending on the characteristics of the glue: cold-pressing by using a special catalyst, which by chemical means causes the polymerization of the resin at room temperature, or hot-pressing, by which the polymerization or setting of the resin is effected by applied heat.

Film glues, generally phenolic in character, will keep for reasonably long periods if they are protected from excessive heat. When they are used in the manufacture of plywood, the sheets of veneer are interleaved with glue film and the whole is pressed in a hot press. The resin film is fused and polymerized by the heat and an irreversible gel is formed. This gel is not affected by water and acts as an effective adhesive.

Glues of the first type may be supplied as liquids or as powders to which hardeners or so-called catalysts must be added before application. Alternatively, some powdered glues are supplied with a hardener incorporated and only require the addition of water to prepare them for application.

### EXTENDERS

In addition to the use of dried or liquid blood as an extender of phenol resin glues, as previously mentioned, experience has shown that other materials may be used to reduce materially the cost of bonding plywood. For example, starch from wheat or rye can be added to reduce the cost of urea resin bonds. Strong bonds can be made with urea resin extended with twice its weight of rye or wheat flour. Such bonds, however, suffer in water-resistance, and where this is a factor of importance extension should be very moderate — not more than forty per cent.

Walnut shell flour is frequently added to resin glues of the phenol type, not so much to reduce the cost of the glue line as to help control the rate of flow of the adhesive during the pressing operation.

Some glue formulas call for the use of other fillers or extenders, such as wood flour, to stabilize the flow of the resin. Small percentages for this purpose are frequently already incorporated in the glue when supplied by the manufacturer.

### PLYWOOD GLUING

In the manufacture of plywood with liquid glues the veneers are coated with glue by means of a mechanical spreader. This machine consists of two grooved steel or rubber rollers placed one above the other to which glue is fed by two chromium-plated steel ductor rollers in much the same way that ink is spread on the rollers and type of a printing press. The veneer is fed into the machine, and the rolls conveying the glue carry the veneer forward and spread an even predetermined thickness of glue over one or both faces, as may be required. It is usual practice to apply glue to the core only in three-ply construction and to the cross bands in five-ply. In multi-ply each alternate ply is glued on both sides, the core and face plies not having glue applied to them by the

spreader. In some cases of double spreading the face plies are placed face to face and passed through the spreader in pairs so that one face of each ply only is glued. Occasionally where only one face is to be glued the top roll is not supplied with glue, the bottom roll of the spreader only being used. The veneers are then assembled into bundles ready for pressing.

### PLYWOOD PRESSING

Pressing plywood is an operation which depends upon the type of glue used. Plywood made with glues of the cold-setting type may be made in bundles and pressed in a hydraulic press without the application of external heat. Casein, starch, vegetable protein, silicate of soda, and cold-setting resin glue may be treated in this manner. In order that full advantage may be taken of the equipment, it is essential that some means of keeping pressure on the plywood be arranged for until the glue has set. This is usually accomplished by placing a number of steel I beams above and below the stack of plywood and using screwed rods fitted with turn-buckles to hold the pressure once it has been applied by the press. The screwed rods have clips on either end which engage with the flanges of the I beams, and they are tightened when the full hydraulic load is on the plywood. The pressure from the press is released, the bundle removed to storage to dry, and a new pack of plywood placed in the press. In this manner the cycle can be continued indefinitely and the press output correspondingly increased. A large percentage of box plywood is made in this manner.

In hot-pressing, the required number of glued veneers is fed into a loader — a machine used to transfer the veneer packs into the hot-press in the shortest possible time. The platens in the modern plywood press may exceed twenty-five in number, and these start opening from the top. When the press is fully open, and all the previous charge of plywood has been removed, the operator starts to close the press, the bottom pair of platens coming together first. The veneer packs must be rapidly transferred, otherwise the glue will be heated in the packs first put in before the pressure can be applied. Full pressure can only be applied after all the veneer packs are in place and the platens closed.

The heating of the glue before pressure is applied will cause partial setting and result in poor bonding. This applies particularly in cases in which glue film is used instead of liquid resins, and has been a frequent cause of rejection of what would otherwise have been very high-grade plywood. To slow up heat transfer and prevent pre-setting of the glue before pressure is applied, wood or metal sheets called cauls are placed above and below the plywood packs when they are loaded into the press. These serve as temporary insulators and, upon removal from the press, should be cooled, after the pressing cycle is completed, before being used again.

Control of moisture content in veneer is another important item in plywood manufacture. The synthetic resin



glues manufactured from urea, melamine, phenol, or resorcinol, are very selective. Many of them will operate satisfactorily only if the moisture content of the veneers lies within a comparatively small range. Small percentage variations above or below the optimum moisture content will frequently cause the resin to polymerize without the necessary adhesion, or else the adhesive will penetrate very deeply into the veneer, leaving a starved glue line, and the plywood will be inferior in strength.

During the pressing cycle the moisture distribution in the plywood has been disturbed. Near the glue lines, moisture produced by the chemical reactions that have taken place in the glue are absorbed by the veneer. The application of heat through the face veneers has raised the temperature of the wood above the boiling point of water, and as a consequence some of the moisture originally in the veneers is dissipated as steam when the pressure of the platens is released. This redistribution of moisture balance in hardwood plywood frequently causes considerable strains to be set up owing to high shrinkage factors peculiar to the heavier woods which, in some instances, have proved sufficiently severe to cause cracking and splitting of the face veneers. In other cases the panels are cockled or buckled. It is, therefore, necessary to treat some hardwood plywood in particular by a re-seasoning process, by adding surface moisture and allowing time for the moisture locked up near the glue line to re-diffuse. The sheets of plywood taken from the press are usually sprayed or dipped in a vat of water for a few seconds and then close-piled — one sheet on top of another — to permit them to pick up and diffuse enough moisture to ease the strains imposed by the pressing temperatures, and so minimize any tendency to warp. The plywood is then carefully dried either by re-stacking on stickers or by passing through a kiln whereby excess moisture can be removed and the sheets brought into equilibrium with the surrounding atmosphere. The careful control of this conditioning process will prevent trouble with the plywood at later stages of utilization.

After conditioning, where such is necessary, the next step is cutting or sanding; if the panel is to be sawed to size the sanding is usually carried out first. In some operations, particularly with soft-woods, the panels are taken directly from the press to the saws and trimmed to the dimensions of the nearest standard size panel; they are then sanded to the sizes required, and finally sawed prior to shipment to the customer.

### CONSTRUCTION OF PLYWOOD

In discussing manufacture of plywood reference was made to various types such as three-ply, five-ply, and multi-ply. No mention was made of the thickness of veneers or the number required for plywood of commercial sizes. The reason for this omission is that the make-up varies with use and the sizes of veneers employed are more or less arbitrary, and are selected according to the purchasers' specifications. For example,

plywood for use in aircraft structures is designed for specific purposes. Some is made of three veneers of equal thickness of maximum stress-carrying capacity compatible with minimum weight; some is more lightly stressed and more latitude can be permitted in veneer selection. For commercial applications appearance may be a controlling factor or stress-carrying capacity may influence the make-up of the boards. It can be easily understood that with so many varying criteria it is nearly always necessary to specify requirements with the order for plywood, so that the most economical combination of veneers may be obtained.

### STANDARD CONSTRUCTIONS

In production of Douglas fir plywood for the domestic market in the United States certain standards have been set up by the industry under United States Commercial Standard CS 45-47. These standards have been promulgated by the Douglas Fir Plywood Association of Tacoma, Washington, and cover both manufacturing and utilization requirements to be met by certain grades of commercial plywoods.

### SIZE TOLERANCES

A tolerance of  $1/64''$  over or under the specified thickness shall be allowed on sanded panels and a tolerance of  $1/32''$  on unsanded panels.

A tolerance of  $1/32''$  over or under the specified length and for width shall be allowed, but all panels shall be square within  $1/8''$ .

In Canada, no official standards are in use for softwood plywoods, each producer having set up grades which conform in some degree with those accepted in the United States. Table 3 shows, under the heading "Item," the principal United States exterior grades. These grades are manufactured with phenolic based waterproof resins, as are the corresponding Canadian exterior grades of plywood.

None of the manufacturers produces all the grades listed in Table 3, but most of them have a selected list which conforms to certain of the grades.

Water-resistant types of plywood manufactured in the United States have their counterpart in Canadian production, and the obtainable grades are similarly specified. The bond in these panel items is made from flour-extended urea-formaldehyde resin or a similar type of extended synthetic resin based on urea, or, in cases in which high temperature and extended immersion are likely, on melamine formaldehyde resins or combinations of urea with melamine resins. Some water-resistant plywood is bonded with casein and vegetable protein glues, some of which are extended with blood. These latter glues, however, are not suitable for use in exposed positions or where they are subjected to moisture. The proteinic nature of these glues provides nutriment for moulds and bacteria which will eventually destroy the glue-line unless it is kept dry or is protected by means of fungicides and bactericides included in the glue mixture.



Table 1 shows the nominal veneer thicknesses and weights of different types of plywood manufactured from Douglas fir:

**Table 1**

(12" Width)s

Plywood Thickness (Net)	No. of Plies	Veneer Thickness (Nominal) in inches			Weight lbs. per 1000 sq. ft. (approx.) (As shipped from mill)
		Faces*	Centers	Crossband	
1/8" -R1	3	1/24	1/24		490
1/8" -S2	3	1/16	1/16		490
3/16" -R	3	1/16	1/16		640
3/16" -S	3	1/12	1/12		640
1/4" -R	3	1/12	1/12		790
1/4" -S	3	1/9	1/9		790
5/16" -R	3	1/10*	1/10*		950
5/16" -S	3	1/8	1/8		950
3/8" -R	3	1/8	1/8		1125
3/8" -S	3	1/8	3/16		1125
3/8" -S	5	1/10	1/12	2@1/12	1125
7/16" -R	3	1/8	3/16		1300
7/16" -R	5	1/10	1/12	2@1/12	1125
7/16" -S	5	1/10	1/10	2@1/10	1300
1/2" -R	5	1/10	1/10	2@1/10	1525
1/2" -S	5	1/8	1/8	2@1/10	1525
9/16" -R	5	1/8	1/8	2@1/10	1675
9/16" -S	5	1/8	1/8	2@1/8	1675
5/8" -R	5	1/8	1/8	2@1/8	1825
5/8" -S	5	1/8	3/16	2@1/8	1825
11/16" -R	5	1/8	3/16	2@1/8	2000
11/16" -S	5	1/8	1/8	2@3/16	2000
3/4" -R	5	1/8	1/8	2@3/16	2225
3/4" -S	5	1/8	3/16	2@3/16	2225
3/4" -S	7	1/8	2@1/12	3@1/8	2225
13/16" -R	5	1/8	3/16	2@3/16	2375
13/16" -R	7	1/8	2@1/12	3@1/8	2225
13/16" -S	7	1/8	2@1/8	3@1/8	2375
7/8" -R	7	1/8	2@1/8	3@1/8	2600
7/8" -S	7	1/8	2@5/32	3@1/8	2600
15/16" -R	7	1/8	2@5/32	3@1/8	2800
15/16" -S	7	1/8	2@3/16	3@1/8	2800
1" -R	7	1/8	2@3/16	3@1/8	3000
1" -S	7	1/8	2@1/8	3@3/16	3000
1 1/16" -R	7	1/8	2@1/8	3@3/16	3175
1 1/16" -S	7	1/8	2@1/6	3@3/16	3175
1 1/8" -R	7	1/8	2@1/6	3@3/16	3350
1 1/8" -S	7	1/8	2@3/16	3@3/16	3350
1 3/16" -R	7	1/8	2@3/16	3@3/16	3525
1 3/16" -S	7	1/8	2@7/32	3@3/16	3525

\*Rough; \*Sanded; \*For sanded panels, thickness is before sanding.

Data from Douglas Fir Plywood Association publication "Technical Data on Plywood".

#### Standard Construction of American Plywoods other than Douglas Fir

While the sizes and arrangements of veneers shown in Table 4 are accepted trade standards, some freedom is permitted in the selection of veneer thicknesses, particularly as regards front and back veneers; when 1/28" veneer is used, the cores are usually cut rather plump.

**Table 4**

#### Standard Construction of American Plywoods other than Douglas Fir

	Faces and Back Before Sanding	Core	Cross-banding
1/8" 3-ply Rotary veneer core	1/20" to 1/28"	1/28"	—
3/16" 3-ply Rotary veneer core	1/20"	1/8"	—
1/4" 3-ply Rotary veneer core	1/20"	3/16"	—
3/8" 5-ply Rotary veneer core	1/20"	1/8"	1/12"
1/2" 5-ply Rotary veneer core	1/20"	3/16"	1/8"
5/8" 5-ply Rotary veneer core	1/20"	3/16"	3/16"
13/16" 5-ply Lumber core	1/20"	11/16"	1/20"

## STANDARD SIZES

**Table 2**

Standard Douglas Fir Plywood Sizes (Moisture-Resistant Type).

Item	Width (Inches)	Length (Inches)	Thickness (Inches) (After Sanding)
Standard Panels (S02S) (S01S)	24	60	1/8 (3-ply)
	30	72	3/16 (3-ply)
	36	84	1/4 (3-ply)
	48	96	3/8 (3-ply)
Wallboard	48	60	1/2 (5-ply)
			5/8 (5-ply)
			3/4 (5-ply)
Sheathing	48	60	1/4 (3-ply sanded 2 sides)
			3/8 (3-ply sanded 2 sides)
			1/2 (3 or 5-ply unsanded)
			5/8 (3 or 5-ply unsanded)
Automobile and Industrial	As ordered up to 48	As ordered up to 96	1/4 (3-ply unsanded)
			5/16 (3-ply unsanded)
			3/8 (3-ply unsanded)
			1/2 (5-ply unsanded)
			9/16 (5-ply unsanded)
			5/8 (5-ply unsanded)
			11/16 (5-ply unsanded)
			3/4 (5-ply unsanded)
Concrete Form Panels	36 48	60 72 84 96	1/4 (3-ply sanded 2 sides)
			1/2 (5-ply sanded 2 sides)
			9/16 (5-ply sanded 2 sides)
			5/8 (5-ply sanded 2 sides)

Data from Douglas Fir Plywood Association publication "Technical Data on Plywood".

**Table 3**

Standard Douglas Fir Plywood Sizes (Exterior Type).


Item	Width (Inches)	Length (Inches)	Thickness <sup>1</sup> (Inches) (After Sanding)
Standard Panels	12 26	48	3/16 (3-ply) 3/4 (5-ply)
	14 28	60	1/4 (3-ply) 13/16 (5-ply)
	16 30	72	5/16 (3-ply) 7/8 (7-ply)
	18 36	84	3/8 (3-ply) 15/16 (7-ply)
(G2S-Ext.)	20 42	96	7/16 (5-ply) 1 (7-ply)
(G1S-Ext.)	22 48		1/2 (5-ply) 1 1/16 (7-ply)
	24		9/16 (5-ply) 1 1/8 (7-ply)
(S02S-Ext.) (S01S-Ext.)			5/8 (5-ply) 1 3/16 (7-ply)
			11/16 (5-ply)
Sheathing Exterior	48	96	5/16 (5-ply unsanded)
			3/8 (3-ply unsanded)
			1/2 (3-ply unsanded)
			5/8 (3-ply unsanded)
Industrial Exterior	As ordered	As ordered	1/4 (3-ply unsanded)
			5/16 (3-ply unsanded)
			3/8 (3-ply unsanded)
			7/16 (3-ply unsanded)
			1/2 (5-ply unsanded)
			9/16 (5-ply unsanded)
			5/8 (5-ply unsanded)
			11/16 (5-ply unsanded)
Concrete Form Panels Exterior	Same as Standard Panels	Same as Standard Panels	3/4 (5-ply unsanded)
			7/8 (5-ply unsanded)
Concrete Form Panels	Same as Standard Panels	Same as Standard Panels	5/8 (3-ply sanded 2 sides)
			3/4 (5-ply sanded 2 sides)

<sup>1</sup>Number of plies listed under thickness is minimum.

Data from Douglas Fir Plywood Association publication "Technical Data on Plywood".

Courtesy: Department of Mines and Resources; Mines, Forests and Scientific Services Branch; Dominion Forest Service; Forest Products Laboratories.





# ROYAL ARCHITECTURAL INSTITUTE OF CANADA

## OFFICERS

PRESIDENT . . . . .	A. J. HAZELGROVE (F)		
FIRST VICE-PRESIDENT . . . . .	MURRAY BROWN (F)	SECOND VICE-PRESIDENT . . . . .	H. H. G. MOODY
HONORARY SECRETARY . . . . .	JAS. H. CRAIG (F)	HONORARY TREASURER . . . . .	J. ROXBURGH SMITH (F)
PAST-PRESIDENT . . . . .	CHAS. DAVID (F)		
SECRETARY . . . . .	MRS. ANNE M. BARSTOW		
	1323 Bay Street, Toronto		

## COUNCIL

JOHN S. PORTER, JOS. F. WATSON, HENRY WHITTAKER . . . . .	British Columbia
PETER L. RULE, G. K. WYNN . . . . .	Alberta
W. G. VAN EGMOND (F), JOHN C. WEBSTER . . . . .	Saskatchewan
H. H. G. MOODY, J. A. RUSSELL, ERIC THRIFT . . . . .	Manitoba
	Ontario
VICTOR J. BLACKWELL (F), MURRAY BROWN (F), JAS. H. CRAIG (F), A. J. HAZELGROVE (F), D. E. KERTLAND, R. S. MORRIS (F), FORSEY PAGE (F), W. BRUCE RIDDELL (F), HARLAND STEELE (F),	
	Quebec
OSCAR BEAULE (F), R. E. BOSTROM (F), EUGENE LAROSE (F), HAROLD LAWSON (F), J. C. MEADOWCROFT, A. J. C. PAINE (F), MAURICE PAYETTE (F), J. ROXBURGH SMITH (F)	
J. L. FEENEY, H. CLAIRE MOTT (F) . . . . .	New Brunswick
LESLIE R. FAIRN (F), A. E. PRIEST . . . . .	Nova Scotia

## EDITORIAL BOARD REPRESENTATIVES

British Columbia: F. S. LASSERRE, Chairman;	R. A. D. BERWICK,	WILLIAM FREDK. GARDINER (F),
	PETER THORNTON,	JOHN WADE
Alberta: C. S. BURGESS (F), Chairman;	M. C. DEWAR,	PETER L. RULE
Saskatchewan: H. K. BLACK, Chairman;	F. J. MARTIN,	DAN H. STOCK, JOHN C. WEBSTER
Manitoba: J. A. RUSSELL, Chairman;	H. H. G. MOODY,	ERIC THRIFT
Ontario: JAS. A. MURRAY, Chairman;	WATSON BALHARRIE,	L. Y. McINTOSH, ALVIN R. PRACK,
	HARRY P. SMITH,	J. B. SUTTON, A. B. SCOTT, PETER TILLMANN
Quebec: RICHARD E. BOLTON, Chairman;	O. BEAULE (F),	JOHN BLAND, P. H. LAPOINTE,
	HAROLD LAWSON (F),	J. CAMPBELL MERRETT, PIERRE MORENCY, LUCIEN PARENT (F),
	J. ROXBURGH SMITH (F),	E. J. TURCOTTE
New Brunswick: H. CLAIRE MOTT (F), Chairman;	W. W. ALWARD,	J. K. GILLIES, D. JONSSON
Nova Scotia: LESLIE R. FAIRN (F), Chairman;	ALLAN DUFFUS,	A. E. PRIEST, J. H. WHITFORD

INCORPORATED BY THE DOMINION PARLIAMENT 16th JUNE, 1908, 1st APRIL, 1912, AND 14th JUNE, 1929



# NEWS FROM THE INSTITUTE

## ALBERTA

The work of the architect is greatly affected by the various public regulations to which buildings must conform. Besides the usual Building Codes and Zoning By-laws there are provincial regulations concerning schools, theatres and other special classes of buildings. Firewriters' and electric installation standards must also be observed. The National Building Code has its own wide domain. The necessary limit to the enforcement of all or any of these is the impracticability of complete inspection. There are many buildings, even important ones, to which efficient inspection cannot extend. A limited number of inspectors cannot be everywhere all the time. Competent architects and competent builders are, in any case, the best guarantors of good work.

Regulations tend to raise the standard both of the planning and of the construction of buildings. That is one of their objectives. It seems inevitable that, in fulfilling this good purpose, they also raise the cost of building and, often enough, they also lower the possible financial return from the buildings. At present, building costs are on the up-and-up from a variety of other causes and at the same time the demand for lower-priced living accommodation sounds ever louder in our ears and somehow it must meet with response. It is considered a highly meritorious thing for an agriculturist to get two blades of grass or two ears of grain growing where only one could grow before. It is not at all meritorious in the architect to make two families live in a space where only one could live before. It is, on the contrary, one of the principal aims of town planning to provide more living space for presently overcrowded families.

This applies most forcibly to apartment accommodation for low-income groups. The competent architect does not require legal regulations. He may even find that some of these hamper the best solutions to his problems. Yet he may at times be thankful that he can refer to regulations which offer him a defence against the machinations of the high-pressure, profit-seeking client. They also call attention to the need that each must proceed with careful regard to neighbours and to the public interest. The architect may design an apartment building with, say, two suites per floor. His client, however, wishes to have three. What is the architect to do? He sees more clearly than his client that three or maybe even four are possible, but he would rather provide the decent space for family living that two will admit of. The client, on the other hand, would like to have the financial return of several extra thousand dollars to his own pocket. Some check on the situation may be a regulation requiring a minimum amount of floor space per family unit. Such regulations are not easy to frame, for many families consist of only one or two persons.

Some guarantee is necessary to secure that a family of six or eight does not have to occupy the space barely sufficient for two.

In the "Standards" of the National Housing Act—which are very carefully prepared—"it is 'recommended' that any building have an area of at least 750 square feet, providing for an ultimate 4 standard room dwelling, measured by exterior wall dimensions and not including porches or verandahs." Further requirements as to sizes of rooms are laid down. These, or better, should be incorporated in the by-laws of all municipalities. They are framed specially for individual houses but they may furnish a basis for the regulation of multi-family dwellings. The apartment building urgently needs very intimate attention for the poorly designed apartment building especially when spread over too large a proportion of its lot area is the most fertile seed of slum conditions. Even the better class apartment house, for which too little garage or other self-contained parking accommodation is provided, greatly intensifies the congestion of streets by motor cars, a growing headache in our present day city life. It seems that it is becoming necessary to regulate the planning of apartment buildings with strict regard to sufficient parking facilities on the same lot. It may seem to a building owner in a commercial district an uncalled for hardship that loading and unloading space must be provided on the lot itself whether he or his tenants require this or not. Yet regulations now quite generally insist upon the provision on the grounds that the building may any day pass into the hands of others who do need the provision and what is law for one must be observed by all. In view of the car situation and for the sake of sufficient space for all it may be found that the maximum coverage of a lot with apartment building should be reduced from the fifty per cent. required by the N.H.A.

Cecil S. Burgess

## BRITISH COLUMBIA

*Extracts from Mr. William Fredk. Gardiner's letter to members and students of The Architectural Institute of British Columbia.*

Eight months have passed since I wrote my last report covering a summary of what the Council had accomplished up to that time, so I feel that I should write you again as our Annual Meeting is drawing very close and much has taken place in the meantime.

Perhaps the most outstanding news which you would like to be acquainted with is the progress made in connection with our new Act. During the past eight months much has been accomplished which I hope will ultimately be to our benefit in acquiring a better Act.

You probably know that our Bill was not by any means



turned down but simply referred back to the Committee of the Caucus for further consideration. Mr. McDougall, M.L.A., Chairman of that Committee, has in the meantime expressed the opinion that he sees no reason why the Bill, with the few amendments suggested, should not go through at the next Session. Mr. Hutcheson, our lawyer, and also Mr. Norris whom we engaged especially to assist Mr. Hutcheson in Victoria, expressed regret that the work they put in at the last Legislature did not lead to more successful results.

Jack McCarter and John Porter, our President, together with Fred Townley, spent days in Victoria watching our interests. However, their time and trouble was not wasted, inasmuch that the Bill was adjusted to the satisfaction of many of those who were affected by it and while it did not reach the Legislature at the last Session, it is still before the Committee of the Caucus and we have every reason to believe will be presented at the Fall Session to the Caucus and in turn to the Legislature.

Excellent work has been done by the Editorial Committee under the Chairmanship of Prof. Fred Lasserre which I hope you have already noticed from the pages of your recent *Journals* of the R.A.I.C. We recently held a meeting and decided to put on an Exhibition before the end of this year of which you will be notified shortly.

Also, it was felt that the Annual Meeting should be extended for at least a two-day session rather than a half a day which does not begin to allow sufficient time to enter into the discussions from the various reports submitted, as well as deal with new business which I am sure many of the members would like to have the opportunity of presenting at the Annual Meeting.

You will be receiving a letter very shortly, if you have not already received one, from Prof. Lasserre, outlining the proposal of presenting plans for publication every Saturday in the Vancouver Daily Province under the auspices of the A.I.B.C., which will be open to all Registered Architects as well as the Articled Students, and including, I hope, the Architectural Students at the U.B.C. It has also been suggested that these plans be made into a book form later on, to form the nucleus of a small house bureau under the auspices of the A.I.B.C.

In conclusion, your attention is directed to the action of certain School Districts in British Columbia requesting submission of sketch plans for school projects on the basis that no obligation is incurred for payment of such plans unless they are approved and accepted by the Board.

School Districts who have made this proposal have been advised that members of our Institute are required to adhere strictly to the provisions of the Architects Act and that their proposals are tantamount to Architectural Competitions and subject to the Rules and procedure as laid down in the Institute By-Laws.

William Fred'k. Gardiner  
Honorary Secretary.

## ONTARIO ASSOCIATION OF ARCHITECTS 1949 CONVENTION AND ANNUAL MEETING

The 1949 Convention and Annual Meeting of the Ontario Association of Architects will, in all probability, be one of the most interesting, educational and entertaining gatherings in the history of the Association.

The Committee of Arrangements, under the Chairmanship of Mr. George Gibson, have spared no effort in providing a programme, which will include many new features and functions, and which it is felt will ensure a record attendance of Members from all parts of the Province.

Mr. Louis Skidmore, A.I.A., of the firm of Skidmore, Owings and Merrill, New York City, will be the guest speaker at the Annual Dinner. It is felt that his presence at a gathering such as the Annual Dinner of the Ontario Association of Architects will be unique because of the prestige of his firm and the wide diversity and international scope of his practice; and because of the unusual projects which he has designed and planned, including atomic bomb plants for the United States' Government.

Other features of the Convention include a larger and more carefully planned Exhibition of New Building Materials and Techniques, an Exhibition of Renderings by Members of the O.A.A., and a display of the work of the Students at the School of Architecture, University of Toronto.

Panel discussions led by prominent professional specialists, business sessions, tours of new buildings, cocktail party and entertainment will ensure the professional and social success of the Convention.

The dates: January 21st and 22nd, 1949 — the place: the Royal York Hotel, Toronto.

## QUEBEC

J. J. P. Oud has been worrying (via the correspondence columns of the R.I.B.A. Journal) about the architectural integrity of the projected United Nations buildings in New York. He expects to see in the finished buildings a competent statement of modern architectural-engineering. But he fears that the statement will have nothing spoken from the heart to warm it—that the smartly engineered project will lack that aesthetic ingredient which he calls "art-in-building".

The polite challenging of this judgment by Howard Robertson and Edward Passmore provoked a second letter from Oud, in which he showed that he is disturbed not merely by the evidence of the U.N. project but by the general tendency of contemporary architecture. He contends that "functional building at the moment is in a phase of self-sufficiency which is the best state to lead it quickly and totally to an end, and, as a matter of fact, by eclecticism if we are not attentive".

The less inspired majority of architects are not the ones who crash the history books; and this majority, through all the ages of building, have no doubt supported



their not-too-robust creative abilities with eclectic props. Today, to choose one obvious example, the designers of brick-faced industrial buildings up and down and across the continent have community of property in a little bagful of tricks that are swapped about from project to project—the light horizontal stone framing of the row of office windows (the “art” in this stonework being interpreted by the wise bidder as “artificial”), the extensible concrete hood that is as serviceable to the architect in actuality as the old “hide” tree used to be in renderings, the integrated flagpole that is an invaluable skewer to pin down the centre of interest.

The principle of international collaboration rather than competition in the designing of the U.N. buildings, is, when you come to think of it, a remarkable departure. And if, on the one hand, too many temperamental cooks can’t be expected to produce a distinguished broth, on the other hand the collaboration itself is one of the few heartening demonstrations by the United Nations to date.

And, considering the architectural aspect only, an international competition for such a project today would undoubtedly suffer the same history as such competitions have suffered in the past. Great, or near-great, architecture *might* be offered by some competitor, and it might be saluted with a prize. But ten to one it wouldn’t be the first prize.

The shrewdest and most diplomatic judgment of a prominent competition in controversial times was, to my mind, that of the competitions for the R.I.B.A. headquarters early in the ‘thirties. The prizes were judiciously divided between the old and new schools of thought and the winning design offered a three-fold policy. It presented the general appearance of contemporary London business-architecture, ponderous with Portland stone (a slimmed-down version of what Howard Robertson had called “the Cyclops architecture of finance, fat, aggressive, and blindly groping toward a future empty of everything except an alarming durability”). Secondly, it made a formal little bow to the modernists by foregoing applied ornament. And, finally, it kept the important die-hards quiet by meeting them at the door with two free-standing Doric columns, supporting delicate bronze nudes.

However, there was a refreshing variation here. In most of the respectable building projects of that day (e.g. Montreal’s Sun Life Building) the classic columns were hanged by the neck to the steelwork. At the R.I.B.A. they were guillotined instead, and stood there without capitals, supporting the bronzes on their raw neckings. To some spectators of the scene (particularly architectural students and fresh graduates) it was a pleasure to see the very guardians of the Style proceed so cheerfully to the execution with gallows and axe.

There’s evidence to show that most laymen, if they felt it were respectable to speak up frankly, would confess that the architect’s earnest concern with the philosophies of modern architectural expression adds up for them to just so much double-talk. The indulgent

client, while he understands and appreciates—and can even be proud of—much of what he is given in his building, is liable to show a negative reaction to just those qualities of the design that please or deject the architect (and account for the most soul-searching ordeals at the drawing board).

But I suspect at times that, while the layman is unforgivably uncouth in his aesthetics, yet he may secrete vestiges of certain earthly instincts that have to do with man and his buildings—instincts that the architect has lost through the purging effect of his special education. So far, I must say, my observations of these suspected instincts suggest that most of them have become rather perverted. Take the case of oak, for instance. It is more often than not foolhardy to specify oak for, say, an entrance door that demands painting in order to complete the colour scheme of a facade. Once the client catches sight of that hallowed wood, the safe bet is that no paint brush will be allowed to touch it. Make it as golden as you like with heavy varnish, but don’t hide that oak.

I have wondered why oak can depend on such a spirited defence of its virtue (even bastard-cut oak) when other fine native hardwoods are abandoned lightly to the architect’s whims. Recently I came across the following observations of one William Harrison, a chronicler of the English scene in the latter half of the 16th century, which go to show that oak has been tampering with the integrity of human beings fully long enough to have left the stirrings of instinct in the modern client:—“In times past men were contented to dwell in houses built of willow, plum-tree, hardbeams, and elme, so that the use of oke was in manner dedicated wholie unto churches, religious houses, princes’ palaces, and navigation, but now all these are rejected and nothing but oke anie whit regarded. And yet, see the change, for when our houses were builded of willow then we had oken men; but now that our houses are come to be made of oke, our men are not onlie become willow, but a great manie, through Persian delicacie crept in among us, altogether of straw, which is a sore alteration.”

Robert Montgomery

## CONTRIBUTORS TO THIS ISSUE

### S. T. J. FRYER

Born in England in 1885 Mr. Fryer received his education in England and Switzerland, coming to America forty-one years ago. Before coming to Canada he spent a number of years in New York and Boston, and in 1911 formed a partnership with W. G. Evans in Hamilton. He was President of the A.A.A. 1923-24. Returning to England just before the outbreak of war, Mr. Fryer was attached to the Ministry of Works in London during the battle of Britain; afterwards he was Technical Officer at No. 1 Region M.O.W. located at Newcastle on Tyne. Returning to Canada this spring he is now associated with H. E. Murton and W. G. Evans in Hamilton.



## Wm. E. Wakefield, M.E.I.C.

Born in England, 1892. Pupil in Mechanical Engineering at the Midland Railway Co., Derby. Technical education Derby Technical College. Served 1914-19 with Royal Engineers. Engineer City of Prince Albert, 1920-21. Dominion Forest Service 1926 as Engineer in Forest Products. Chief of Division of Timber Mechanics 1940, Forest Products Laboratory, Ottawa, Dept. of Mines and Resources.



The Editorial Board wishes to express its indebtedness to **Mr. Arthur H. Eadie** for the interest, which he took, in the compilation of material for the Industrial issue.



## PUBLIC RELATIONS OFFICER

The Council of the Ontario Association of Architects has under consideration the appointment of a Public Relations Officer and is of the opinion that there may be some one among the Members who may be interested in undertaking public relations work on behalf of the Architectural Profession in Ontario.

The appointment would be on a full time basis, and any Architect who may be interested is requested to communicate with the Secretary, Ontario Association of Architects, 1323 Bay Street, Toronto.

## BOOK REVIEW

THE AGE OF ADAM  
by James Lees-Milne

Published by B. T. Batsford Ltd., London, W.1, England. Distributed in Canada by Clarke, Irwin & Co. Ltd., 480 University Ave., Toronto. Price \$5.00

This book is one of the British Art and Building series, for which Messrs. Batsford are to be highly commended. Few of the authors in the series will be known to Canadians, but, like Mr. Sacheverell Sitwell who wrote "British Architects and Craftsmen," all have produced books that are remarkable for their scholarship, readability and humour. All are well illustrated and the "Age of Adam" is no exception with 200 illustrations, some of which are in colour.

We like to think that the modern architect or the modern art critic is aware of contemporary achievement in British architecture, but that each is capable of appreciating the architecture of the past—even to the extent of writing about a period which interested him particularly. The history of architecture is taught in the Schools of Architecture for as long as four years in a five-year course, and is thought to be essential to an understanding of the problems of our own age. For Mr. Lees-Milne there is only the past, unless one mistakes his meaning in the foreword. "*But to-day, since Britain has won the war, we exist (for human beings have long since ceased to live) in a more progressive vacuum—one of political*

*ineptitude, social decadence, spiritual deadlock, and artistic gelidity.*" And so he approaches his subject upon delicious bits or retrogression away from the present quagmire of existence." However one can forgive him that (and indeed sympathize with him) for an excellent little book that should make glad both architect and lay reader if they are fortunate to receive it for Christmas. It should be in every School of Architecture library.

E.R.A.

## LOCAL STYLE IN ENGLISH ARCHITECTURE

An Enquiry Into Its Origin and Development by T. D. Atkinson.  
Published by B. T. Batsford Limited, London W. 1, England. Distributed in Canada by Clarke, Irwin & Company, Limited, 480 University Avenue, Toronto. Price \$3.75.

This is another in that profusely illustrated and beautifully got out series on British Art and Buildings by Batsfords. It is on a rather more specialized subject than those previously and confines itself to analysis of distinctly local varieties of medieval architecture in England. The factors determining the local variation are listed as geology, race, religion, foreigners, wealth, transport and fashion and each is studied as well as the actual variations themselves.

The subject is rather too large for so small a book, the chapter on variations in church furniture for instance is only five pages long. It is likely to be chiefly interesting to those with an already fairly comprehensive knowledge of English architecture.

A. Adamson

## OBITUARY

### JOHN METHVEN

John Methven, well known Chatham architect, died November 1. He was in poor health for the past year.

Mr. Methven was born in Dundee, Scotland, 65 years ago. He came to Canada 33 years ago, and practised architecture in Chatham for the past 30 years, during which time he designed many fine homes, schools, public buildings, and factories in this city and district.

He was architect for The Canada and Dominion Sugar Company, and was associate architect for the International Harvester Company on their new Chatham factory. He was architect or associate architect for the Chatham Board of Education on various schools in the city.


Mr. Methven graduated in architecture from the Edinburgh University, and for some time was associated with Sir Rowand Anderson in work for the Ancient Monuments Commission in Scotland.

Mr. Methven took a great interest in community affairs. He was a charter member of the Chatham Rotary Club and a member of the Kent Club.

He is survived by his wife, the former Miss Nicholls, two daughters, Mrs. Garland Fiske of Toronto, and Miss Elizabeth Anne Methven of Chatham, and one son, Dr. J. F. Methven of Toronto.

J. W. Storey




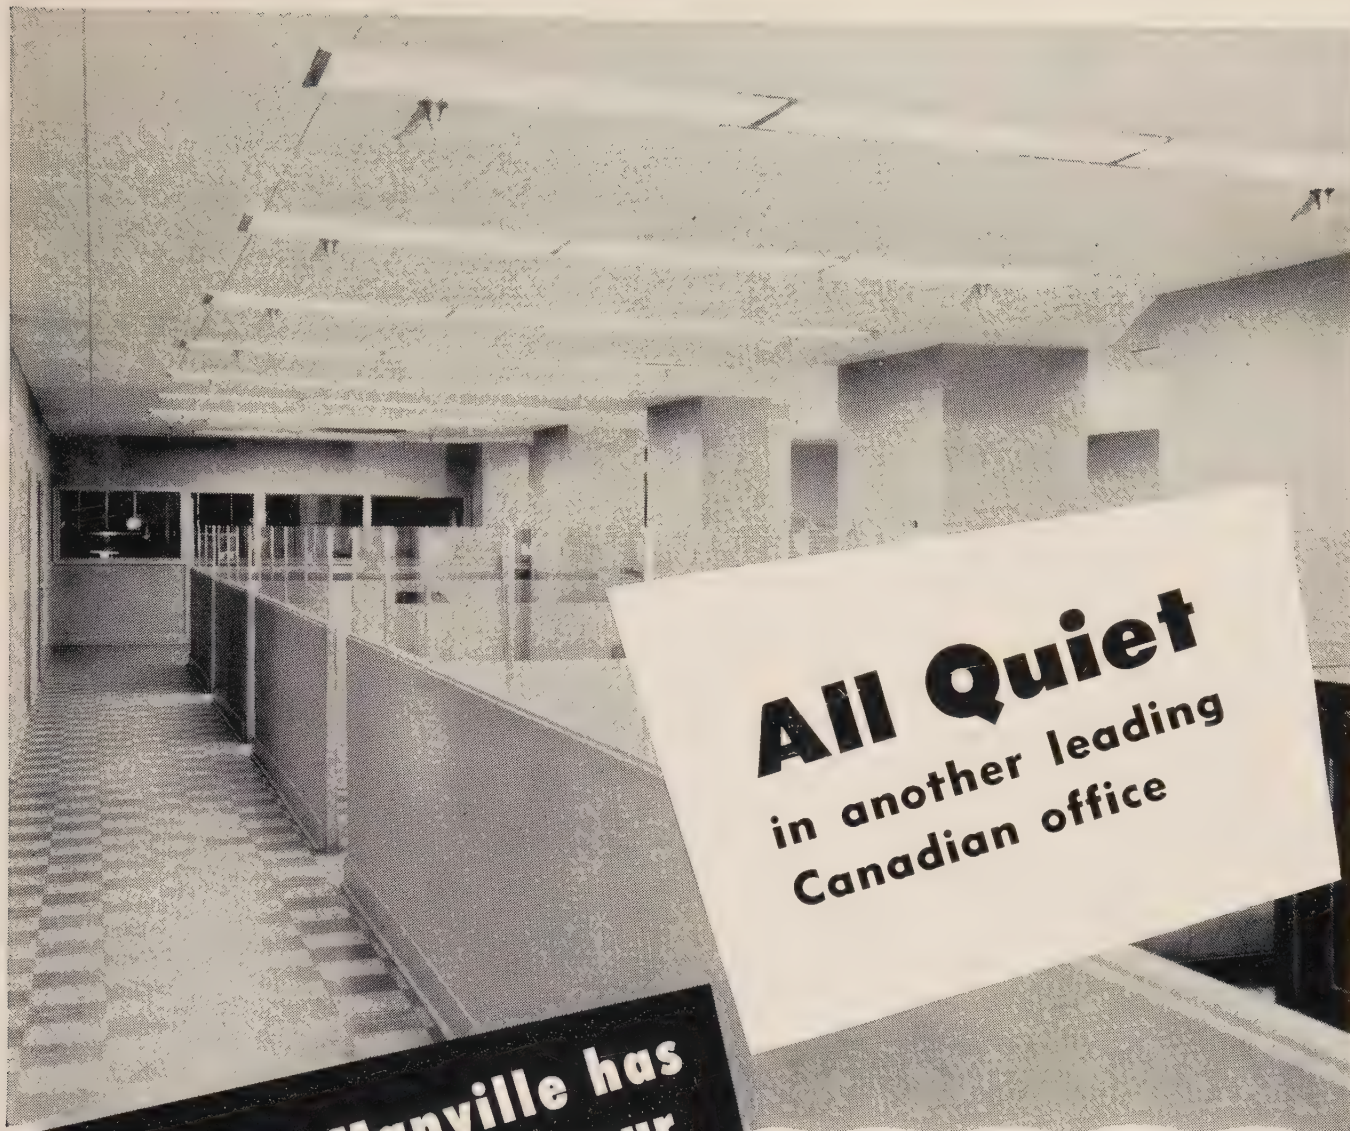

## All Quiet in another leading Canadian office

**Johns-Manville has  
the answer to your  
noise problem too!**

• RADIO STUDIOS • RESTAURANTS  
• SCHOOLS • OFFICES • THEATRES  
• HOSPITALS • STORES • CHURCHES

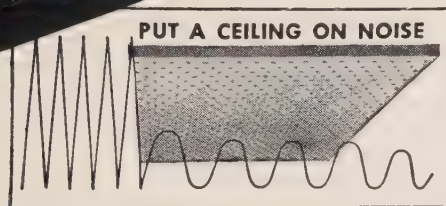

*The attractive general office of Robinson Cotton Mills Limited, Toronto, uses J-M Perforated Transite Acoustical Panels on all ceilings.*

■ Yes, whatever your noise problem — Johns-Manville has a scientifically correct answer. J-M experience in controlling sound dates back 35 years — so today, when you choose J-M Acoustical Materials for any type of job you get full benefit from this backlog of knowledge.

First Johns-Manville recommends the *right* acoustical material for each specific condition, then J-M follows through with the *correct* installation to assure maximum efficiency. That's the all inclusive service... the undivided responsibility you receive from Johns-Manville.

For information on Johns-Manville Acoustical materials send for free book, "Sound Control". Write Canadian Johns-Manville, Toronto, Montreal, Winnipeg or Vancouver.

A-705



**Johns-Manville**

*Pioneers in*

**Sound Control**





# In "BLACK and WHITE"



**Y**ES, your specifications in "black and white" leave no room for doubt or substitution because they demand dependable elevator equipment. And, you know that the name "Turnbull" is synonymous with the last word in quality and dependability — be it elevators, electric stairways or dumbwaiters.



We are constantly serving Canada's architects with engineering advice, traffic studies, elevator specifications and other valuable data of assistance to them and their clients.



If it's a question of vertical transportation, consult Turnbull first!

## Turnbull Elevator

COMPANY LIMITED • TORONTO, CANADA

*Branch offices across Canada*



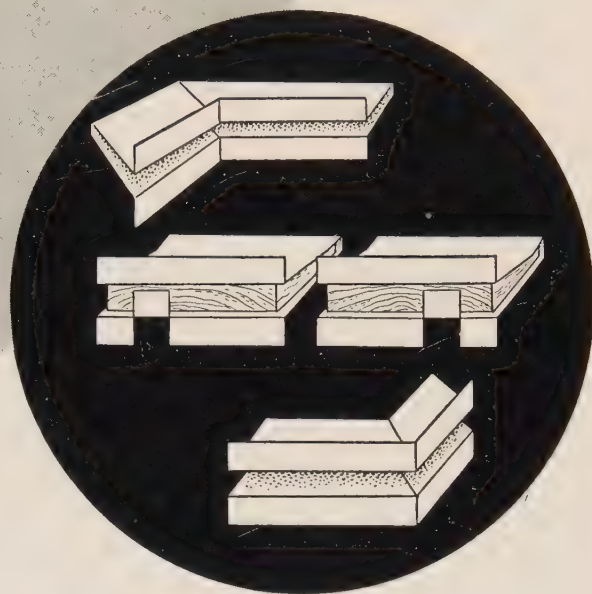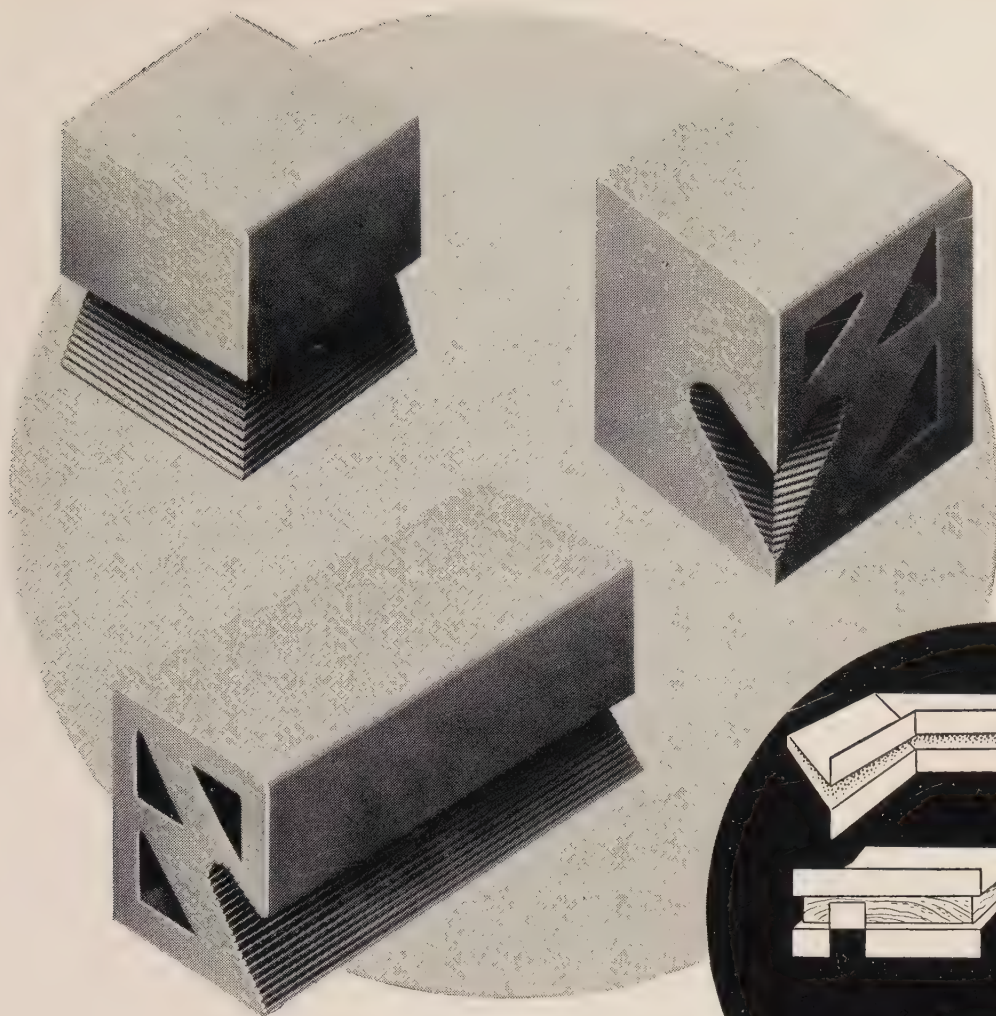

## BARRETT FLASHING Blocks and Forms

**become an integral part of your roof**

Barrett flashing blocks interlock the parapet wall with the waterproof roof membrane. The coupling is so complete that this one-time trouble spot actually becomes one of the strongest parts of your roof. And to make that union even more secure, the groove of the new Barrett flashing block is *serrated*. This makes the bond firmer than ever before. The Barrett flashing system, used in conjunction with a Barrett Specification\* Roof, eliminates the possibility of flashing leaks at parapets, curbs, chimneys, firewalls, etc.

Specify Barrett flashing blocks or forms with a Barrett "SPECIFICATION" Roof. Have them both covered by a Barrett Bond!

*Refer to Section 6 in your Barrett "SPECIFICATION" Manual.*



\*Reg'd. Trade Mark

The extensive Barrett line of Building Materials includes Specification\* Roofs, Asphalt Shingles, Roll Roofings, Sheathings, Protective Products, Rock Wool Building Insulation.


**THE BARRETT COMPANY, LIMITED**

MONTREAL • TORONTO • WINNIPEG • VANCOUVER





ay you and yours enjoy  
good health and happiness  
throughout the coming year.

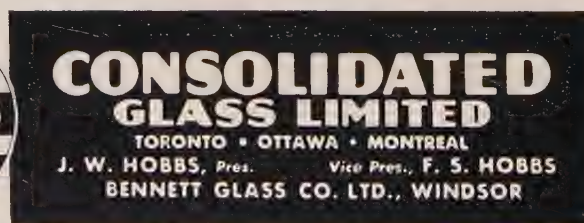



# UNIK

## FLUSHWOOD DOORS

### *Harmony and Distinction*

**No. 1000-Sliced Veneers  
Artistically matched  
as for grain and colour**

In harmony with any decorative scheme . . . the smooth beauty of Unik Flushwood adds distinction to every building — every room. Only the finest woods are used—handsomely designed to play up the rich natural grain overall effect.

There's more than beauty to Unik Doors, however . . . they are superior in every way. Strong and durable, they are precision-made by skilled craftsmen. Open your home to the inviting charm of Unik Flushwood Doors.

**Write to-day  
for full information.**



**CANADA FLUSHWOOD DOOR LIMITED**  
TERREBONNE · P.Q.



# Complete Protection!



## ATLAS

# TRAFFORD TILE

*Asbestos-Cement Corrugated*

The perfect roof covering and siding —  
no matter the size . . . Atlas Trafford Tile combines  
lightness with great strength, and is  
equally effective for pitched roofs and sidings.

### ▶ **PERMANENT PROTECTION AND INSULATION**

Asbestos content makes Atlas Trafford Tile fire and weather resistant.

### ▶ **STRONG AND DURABLE**

Will not corrode. No painting or maintenance required. Light yet scientific design ensures strength.

### ▶ **ATTRACTIVE APPEARANCE**

Atlas Trafford Tile maintains a clean look. Grey colour only. Laps give the effect of Roman tiling.

### ▶ **ECONOMICAL AND EASY TO APPLY**

Minimum of skilled labour required . . . reducing costs. Can be speedily erected.

*Write today for literature.*



## ATLAS ASBESTOS CO., LIMITED

110 McGill St.  
MONTREAL

35 Mutual St.  
TORONTO

1511 Valour Rd.  
WINNIPEG

Ford Bldg.  
VANCOUVER


AA-8-2





### CATALOGUE "S" C

If you have not received your copy of our new EMCO Smoothbore Solder Fittings Catalogue . . . send a request on your letterhead and same will be mailed you immediately.

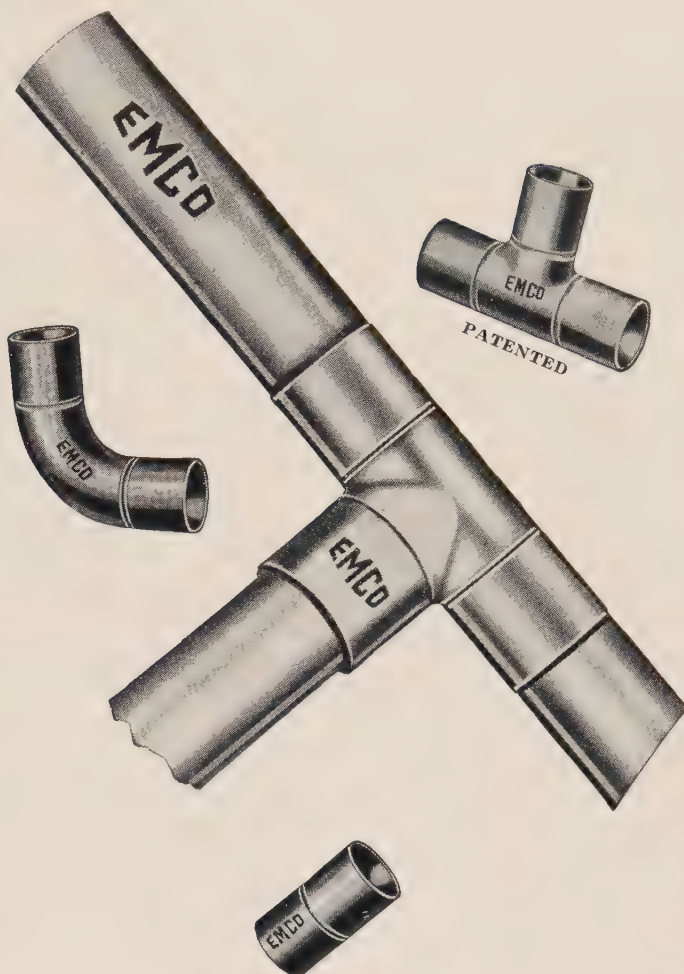

# EMCO

## Smoothbore SOLDER FITTINGS and COPPER PIPING

The Traditional EMCO-QUALITY in materials and craftsmanship is your assurance of complete satisfaction . . . for every PLUMBING . . . HEATING . . . REFRIGERATION and AIR CONDITIONING Installation.

### EMCO Smoothbore Solder Fitting Advantages

- |                            |                            |
|----------------------------|----------------------------|
| 1. Corrosion Resisting     | 8. Space Saving            |
| 2. Light Weight            | 9. Leak Proof              |
| 3. Smooth Flow             | 10. Rust Proof             |
| 4. Eye Appeal              | 11. Low Friction Flow Loss |
| 5. Economy of Installation | 12. Reliability            |
| 6. Salvage Value           | 13. Flexibility            |
| 7. No Threads To Cut       | 14. Low Radiation Loss     |

EMCO Smoothbore offers a complete HOT or COLD Piping System of Everlasting Copper . . . the FIRST COST is the LAST COST.

**SPECIFY the BEST . . . SPECIFY EMCO**

Distributed by Reliable Jobbers or service from any EMCO Branch



### EMPIRE BRASS MFG. CO. LIMITED

London - Hamilton - Toronto - Sudbury - Winnipeg - Vancouver

owning and operating

### METALS LIMITED


Calgary - Edmonton - Vancouver

**MORE PROFIT...EASIER TO USE...BETTER TOO**



# MONEL

**MEANS LONG-LASTING — RUST-FREE  
STORAGE HEATERS**

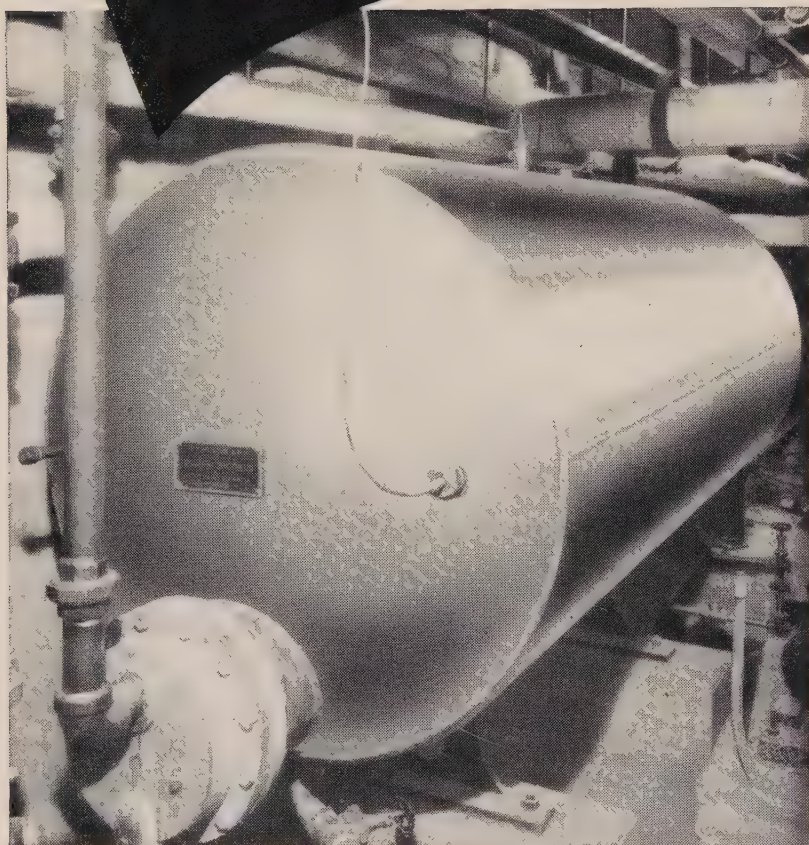

This is a cooperative advertisement of  
The International Nickel Company of Canada, Limited.


## **Darling Brothers Limited**

140 PRINCE ST. —SINCE 1888— MONTREAL, CANADA  
Halifax, Saint John, Quebec, Arvida, Ottawa, Toronto, Winnipeg, Calgary,  
Vancouver, St. John's, Nfld.

Whitlock-Darling Type "K" Storage Heaters constructed in Monel\* offer many advantages. Stronger and tougher than structural steel, Monel is a solid, non-ferrous metal that is absolutely rust-proof and highly resistant to corrosion. This combination of properties assures continuous rust-free hot water at all times and keeps costly repairs and replacements at a minimum. We will gladly survey your hot water requirements and recommend the most efficient type of installation.

\*Monel is a registered trade mark of  
The International Nickel Company.

Write for Bulletin  
"Whitlock-Darling  
Type 'K' Monel  
Storage Heaters". A  
copy will be sent  
without cost or  
obligation.







# MOVING Picture!

"Moving" is right,—fire can move faster than a Walt Disney rabbit and it sweeps through unprotected doorways as though a lion were after it.

Most fires start small. You can keep them small—within the room they start—if your doorways have Westeel Fire Doors, Underwriter-labelled, automatic closing in case of fire.


They reduce insurance premiums and they avoid losses that insurance can never repay. They are a good investment.

Ask for catalogue.

**Preventable**  
*with*

**WE ALSO MAKE:**

Ventilators and Skylights  
Metal Roof Deck  
Fire Escapes  
Hollow Metal and  
Kalamein Doors  
Metal Windows  
Lockers and Shelving  
*Deliveries dependent on steel  
supplies*



**WESTEEL**  
AUTOMATIC CLOSING  
**FIRE DOORS**


## WESTEEL PRODUCTS LIMITED

MONTREAL • TORONTO • WINNIPEG

REGINA • SASKATOON • CALGARY • EDMONTON • VANCOUVER




# IT'S GOOD BUSINESS

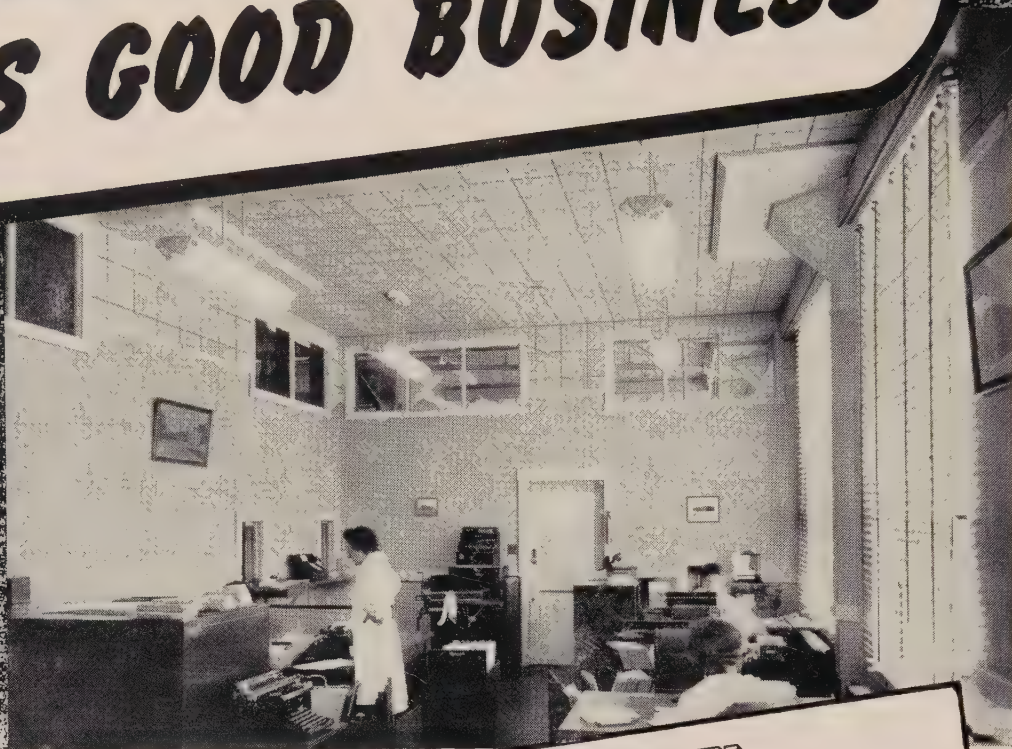

**SOUND ABSORBING**

**ACOUSTI-  
CELOTEX**

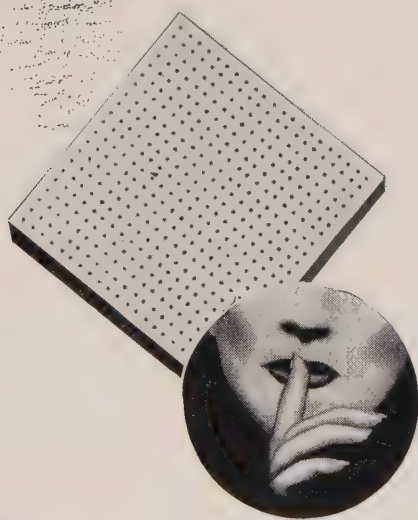

◆ A quiet office is an efficient one. Acousti-Celotex solves the problem of ordinary office noise with its nerve racking, efficiency sapping effect on every worker. Apply Acousti-Celotex perforated fibre tile to ceilings and quieten the noise from high speed tabulating and accounting machines, ringing telephones, conversation, clattering typewriters and all other myriad noises that have such an adverse effect.

Acousti-Celotex is easily and quickly installed at moderate cost. Remember, repeated paintings will not reduce its sound conditioning efficiency.

*Get in touch with our nearest branch for consultation and estimate.*

## **Dominion Sound Equipments Limited**

**Head Office: 1620 Notre Dame St. West, Montreal**

**Branches at: Halifax, Saint John, Toronto, Winnipeg, Calgary, Vancouver**



*NOW! Available in Canada*

# PC VUE Glass Blocks

(A MODULAR PRODUCT)

*Hobbs Glass Limited presents  
Transparent glass blocks: gen-  
eral vision combined with effec-  
tive insulation.*

PC VUE Glass Blocks had already won wide acceptance when war halted their production. They were developed by Pittsburgh Corning Corporation at the request of architects, engineers and designers who wanted a "glass block you can see through."


The PC VUE Glass Block is made of transparent, fire polished glass, with smooth surfaces inside and out. It admits plenty of clear daylight, allows sufficient general vision of what goes on outside to prevent the "shut-in" feeling. PC VUE Glass Blocks can be installed alone in large lighting panels or can be used in combination with regular block patterns, to provide vision areas of desired size and location.

Like the other PC Glass Blocks, the VUE Block contains a partial vacuum, a dead air space that gives it twice the insulating value of ordinary single-light glass. So heat transmission is retarded—even through large opening panels—easing the load on air conditioning equipment and reducing heating costs.

When you are planning new buildings or remodeling projects, be sure you have all the latest information on PC VUE Glass Blocks. Just send in the coupon and we'll mail you free copies of new booklets on PC Glass Blocks.

## PC GLASS BLOCKS

**...the mark of a modern building**

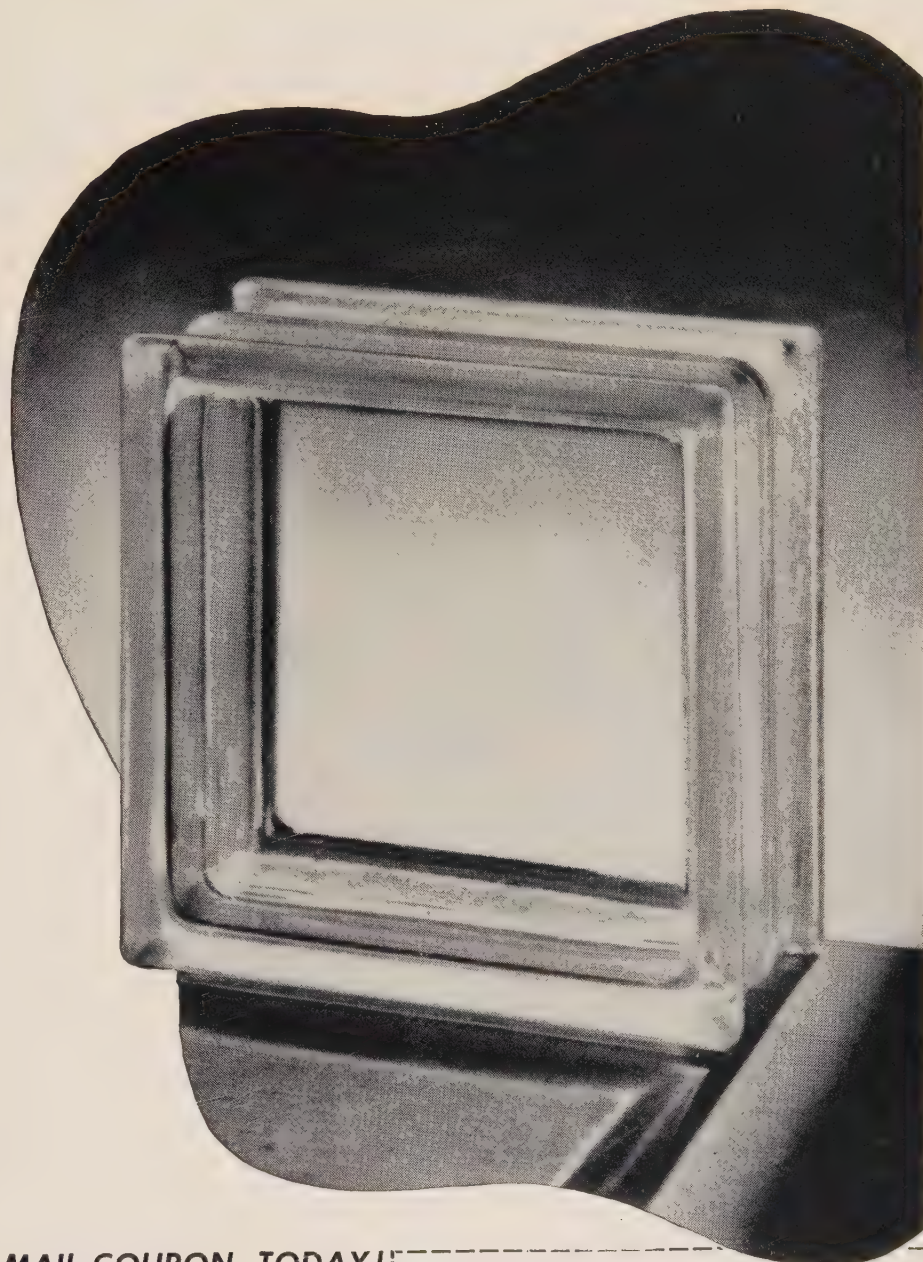

**MAIL COUPON, TODAY!**

**Branches  
coast to coast**



Hobbs Glass Limited, Dept. 10-L,  
London, Canada.

Please send me descriptive literature on PC Glass Blocks  
for industrial and commercial buildings.

Name .....


Address.....

City..... Prov. ....




#### BAR JOIST CONSTRUCTION

Typical 2½" monolithic slab on steeltex metal lath supported by bar joists.

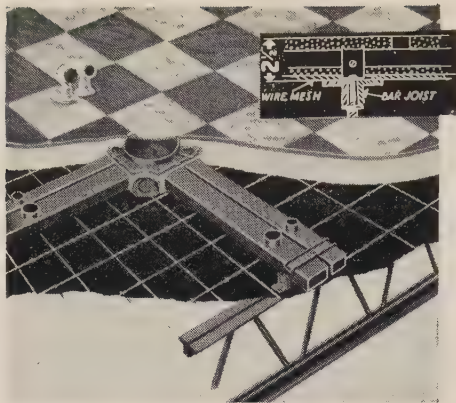


#### METAL FORM CONSTRUCTION


Reinforced concrete joist 2½" slab over permanent or removable metal tiles.

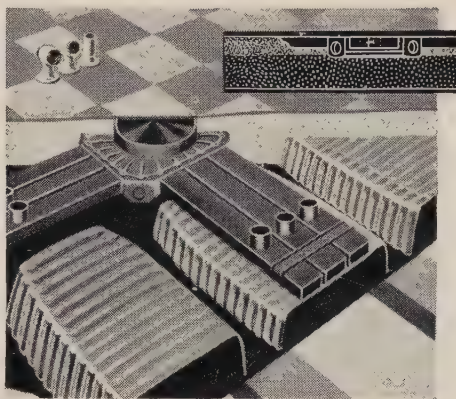

**CELLULAR  
STEEL FLOOR**  
Typical steel floor panels with concrete fire-proofing.

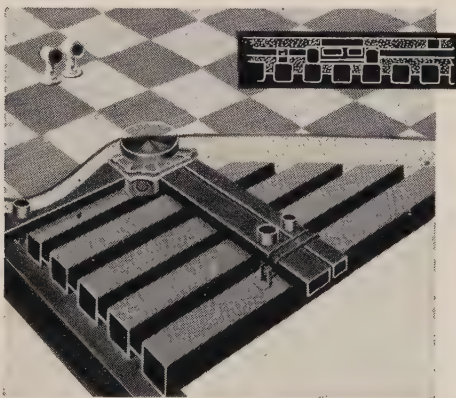

**CONCRETE  
SLAB**  
Standard monolithic or slab and fill construction.

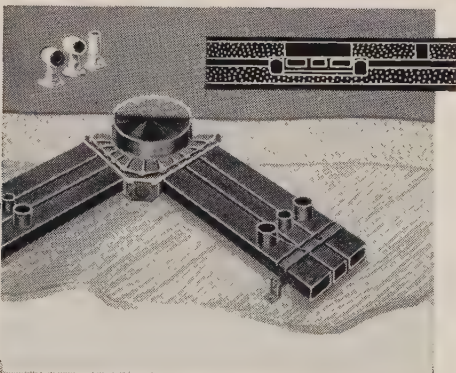


# Walkerduct is engineered ... TO FIT

Every WALKER Underfloor System, although made up of standard parts, is designed to serve the electrical needs of each particular job. Systems can be readily adapted to any type of floor construction in either new or existing buildings. WALKERDUCT provides economical and flexible means of meeting every outlet and circuit requirement likely to develop during the life of any building.

**walker**  
of Conshohocken **UNDERFLOOR SYSTEMS**

**MODERNIZING  
EXISTING  
FLOORS**  
All types wood  
or concrete.

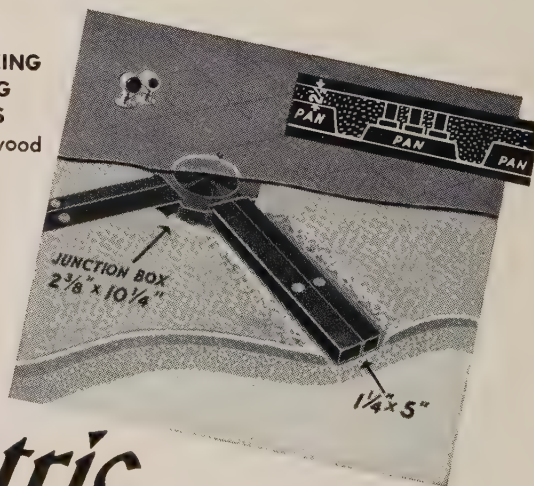

FOR FURTHER DETAILS, write for Nor-lectric Bulletin W-6-1

## Northern Electric


COMPANY LIMITED  
26 DISTRIBUTING HOUSES ACROSS CANADA

43-8-4



*Merry  
Christmas*

TO ALL OUR FRIENDS  
AND CUSTOMERS

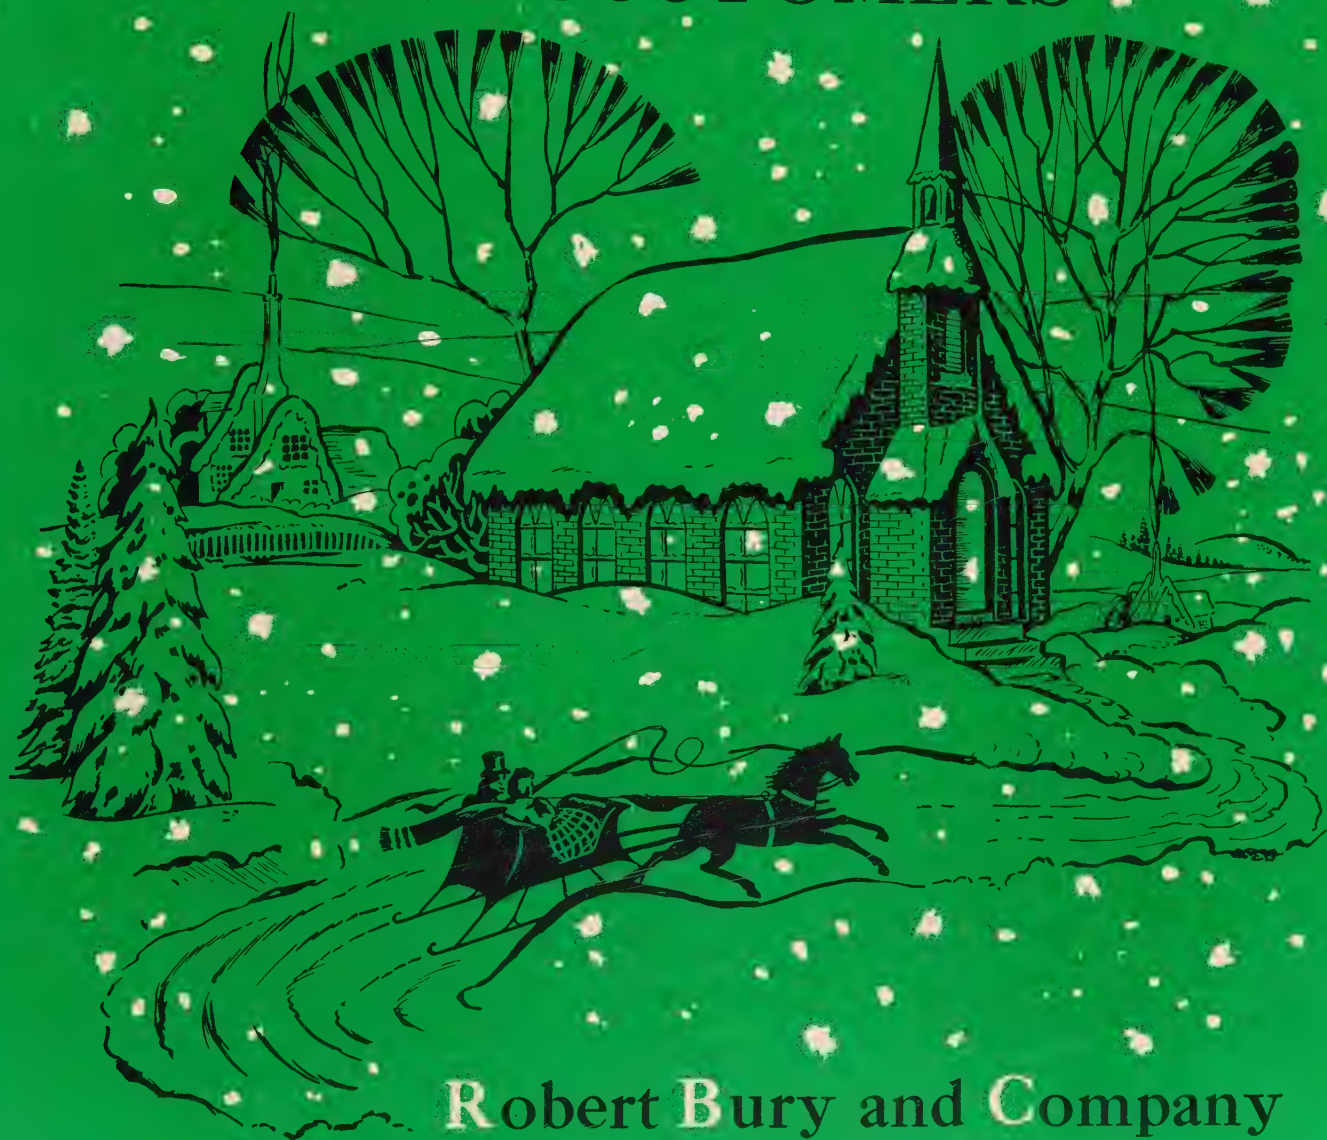


**Robert Bury and Company**  
(CANADA) LIMITED, TORONTO, ONT.,  
KING AND SUDBURY STREETS



RUSTLESS...SOLID  
WEAR RESISTANT

# Monel

FOR HOSPITAL  
EQUIPMENT

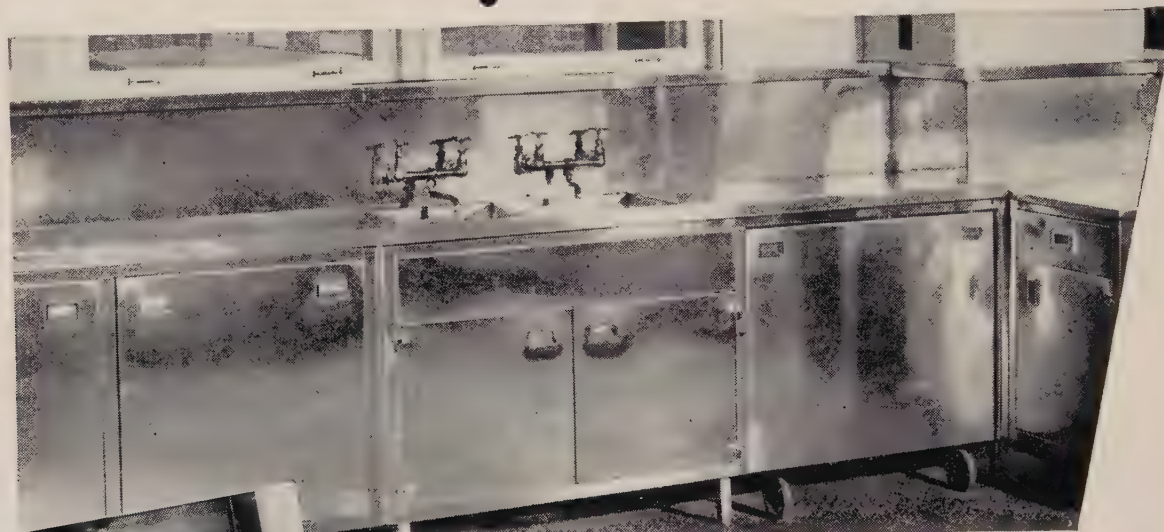

The Monel diet kitchen sink and medicine cabinet illustrated, now installed in the Queen Elizabeth Hospital, Toronto, were manufactured by Metal Fabricators Ltd., Tillsonburg, Ont., who are qualified to design and fabricate hospital equipment to meet your requirements.

The outstanding metal for hospital equipment is Monel. It is stronger and tougher than structural steel. It resists heat, steam, acids and alkalies and a wide range of hospital solutions. Monel is a solid, rustless metal with no coating to chip, crack, peel off or wear away. In main or diet kitchens . . . in cafeteria and laundry . . . this attractive metal assures trouble-free, day-after-day service. For replacements, as well as for the new facilities you are planning, be sure to specify Monel for essential long-lived equipment.



Monel is the registered trade mark of  
The International Nickel Company.




THE INTERNATIONAL NICKEL COMPANY OF CANADA, LIMITED. 25 KING ST. W., TORONTO




# There's more than beauty in the NEW *Modine* Convector

*Important new features simplify installation . . . provide more convenient operation and control  
. . . assure superb heating comfort.*

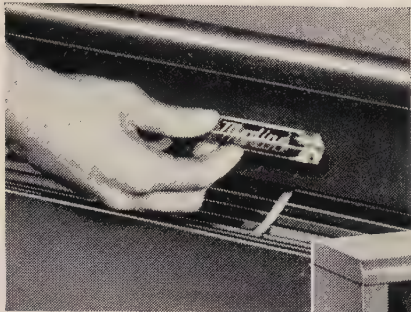

**NEW DUAL-PURPOSE DAMPER!**  
A touch of the hand operates the self-positioning damper for convenient temperature control. When closed, damper conceals unique outlet grille . . . blends enclosure into adjoining wall.

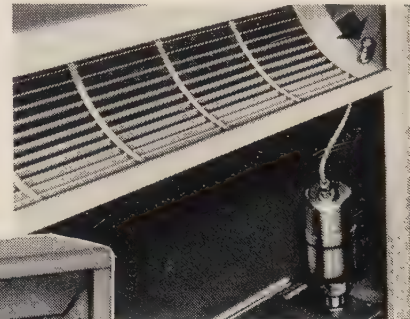

**NEW CONVENIENT AIR VENT-ING!** Out of sight, yet instantly accessible, air vent can be rigidly secured to curved outlet grille as illustrated whenever convectors are installed on hot water system.

**NEW 5-SECOND REMOVABLE FRONT!** For easier installation and cleaning, effortless lifting action quickly removes entire front panel. No need to bother with screws, catches or tools. Panel is easy to replace too.



**NEW VERSATILE ENCLOSURE DESIGN!** Designed for modern interiors, type F Convector (shown with damper closed) is ideal for recessing — either partially or fully (at right) or for exposed installation against wall.



**NEW SNAP-IN GRILLE!** Completes striking appearance of Modine Convector. An optional feature you can add now or later. Snaps in or out of place without tools. Affords quick access for cleaning beneath cabinet.

Look, compare, consider . . . see for yourself why Modine is top choice in convector radiation! Note these outstanding features: Modine Convectors are functionally styled to blend perfectly with your up-to-the-minute ideas of interior design. What's more, Modine gives you completely new installation, control and maintenance features that make it really big

news in modern radiation design. Available in four beautiful cabinet styles in a wide range of modular sizes. You'll want Modine . . . for the modern home, apartment, school, office, hospital. For complete information on Modine convector radiation write to your nearest Canadian Representative.

Modine Manufacturing Co., Racine, Wisconsin.

**SARCO CANADA LTD.**

496 Church St., Toronto 5, Ont.

OFFICES: Calgary, Winnipeg, London, Hamilton, Montreal, St. John.



**R. E. JOHNSTON CO. LTD.**

1070 Homer Street, Vancouver


833 Yates Street, Victoria



*Your positive selection for* **SMALL HOME**  
*installations*



THE  
**VIKING  
JUNIOR**

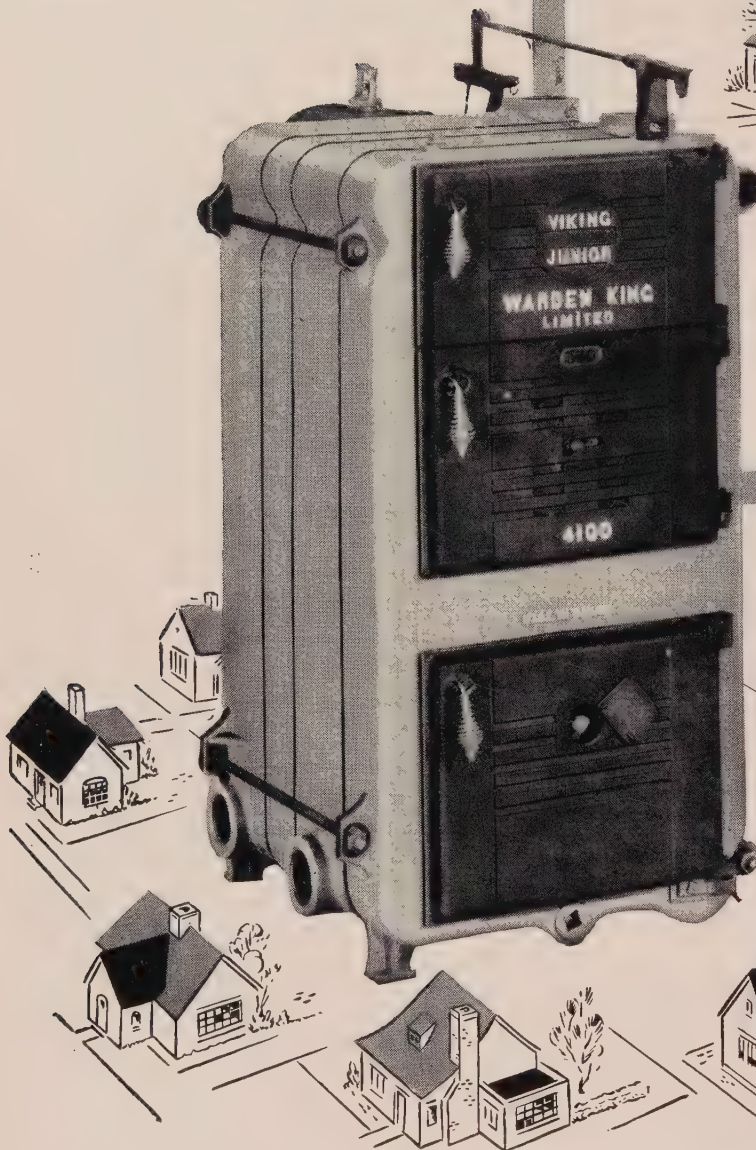

● This small, efficient, cast iron, square sectional boiler brings all the advantages of hot water heating within the economy bracket of the small size home, flat or bungalow. For that service it was especially designed. In that service it has proven its efficiency and economy.

When you specify a Viking Junior you are assuring your customers: economy of operation, ease of control and long life.

Only 42" high and 23" wide, the Viking Junior can be installed in low ceiling basements. Its unique wet base construction with unusually low return inlets enables it to be set up on any floor for efficient heating on the same level. Extra sections are easily added to provide the additional heating capacity required for any future extensions to the home.

Suitable for hand firing with coal, coke or wood, and for blowers, stokers, oil burners and gas burners, the Viking Junior is easy to assemble and easy to install.

*Fully descriptive literature gladly supplied on request.*

**Warden King**  
**LIMITED**



*"The Grand Old Name in Heating"*

Head Office and Works: 2104 Bennett Ave., Montreal  
Ontario Branch and Warehouse: 299 Adelaide St. W., Toronto

MANUFACTURERS OF CAST IRON HOT WATER AND STEAM BOILERS, RADIATORS, SOIL PIPE AND FITTINGS



At Christmas when  
all doors open wide on  
scenes of warmth and  
happiness, fittings by  
Belleville blend  
to perfection with any  
surroundings... and offer  
a reassuring measure  
of protection, too.

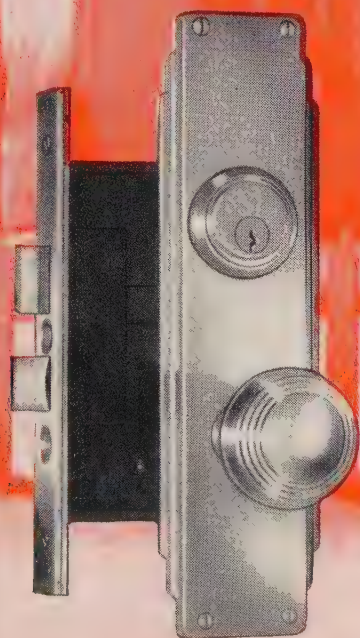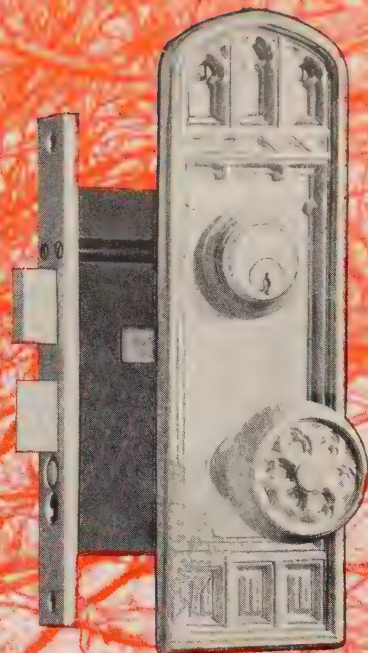

**Belleville**

BELLEVILLE-SARGENT & CO. LIMITED  
BELLEVILLE • ONTARIO



# SYLVAPLY WEATHER-BOARD *Extra Long* JOB LENGTH PANELS

Sylvaply Weather-board  
EXTRA-LONG panels are an  
ideal medium for carrying out sweeping  
horizontal design treatments. For  
simplified construction . . . elimination of  
unnecessary joint detail . . . specify  
job length Sylvaply Weather-board  
EXTRA-LONG panels.

★ For interior wall panelling,  
sub-floors, counters; exterior  
siding, truck panels, boats  
and countless other  
applications where job  
length panels save  
time and reduce  
joint details.

## SYLVAPLY WEATHER-BOARD


HOT PRESSED, RESIN-BONDED PLYWOOD

### EXTRA-LONG PANELS


Extra Sales for Dealers. Extra  
Service for Builders, Archi-  
tects and Industrial users.  
Extra Savings on Labour and  
Joint Details.

### JOB LENGTHS


12 to 24 Feet  
Other lengths up  
to 40 feet made  
to order.



JOB LENGTH PANELS  
For Store Fixtures



BODY LENGTH PANELS  
For Truck-Body Construction



CAR LENGTH PANELS  
For Freight-Car Building

# H. R. MacMILLAN SALES LTD.


VANCOUVER • EDMONTON • WINNIPEG • TORONTO • MONTREAL

XL2



# OVERHEAD *that's Profitable*

A recent store installation of Viz-Aid Fluorescent Lighting

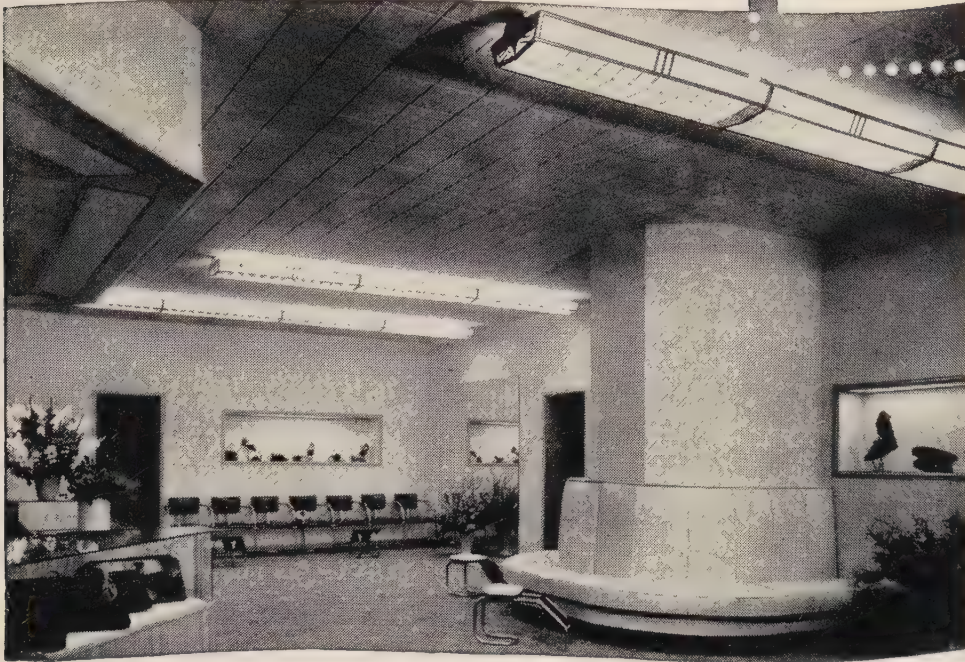

It has been proved that sales increase substantially and overhead lighting costs are reduced when Viz-Aid fluorescent lighting units are installed.

The sales-building illumination of this streamlined unit attracts more buyers . . . shows off merchandise to advantage by bringing out colours hidden by conventional lighting. Besides, Viz-Aid gives this high intensity of light for many years. No wonder Viz-Aid is "overhead that's profitable".

Viz-Aid's exclusive mechanical features cut maintenance costs to the bone. It takes but a few seconds to remove the enclosure for cleaning or relamping.

Remember, with Viz-Aid, you invest in illumination, instead of buying fixtures . . . whether for stores, offices, drafting rooms, or schools. Ask your electrical wholesaler or contractor to tell you more about Viz-Aid before you install lighting equipment.


AE48-21

**THE VIZ-AID** with two  
40 watt lamps . . . surface or  
suspension mounting . . . single  
or continuous units.




ENDORSED  
ELECTRICAL  
EQUIPMENT


**A M A L G A M A T E D**  
ELECTRIC CORPORATION LTD., TORONTO AND MONTREAL




PANELBOARDS



WIRING SUPPLIES



SAFETY SWITCHES



PORTABLE LAMPS



MOTOR CONTROL

SOLD BY RECOGNIZED WHOLESALERS FROM COAST TO COAST



# How to specify Industrial Flooring that will please everybody!

## 1. "The floors shall be Cold Laid Industrial Asphalt Mastic"

**NOTE:** Industrial Asphalt Mastic Flooring mixtures are made by mixing Flintkote Flooring Emulsion in the proper proportions, as called for in the specifications, with sand, crushed stone or gravel, a setting agent and clean water.



# FLINTKOTE



**ASPHALT PRODUCTS**  
FOR BUILDING AND  
INDUSTRY



**COLAS**  
PAVING MATERIALS



**TILE-TEX FLOORING**  
RESIDENTIAL-COMMERCIAL  
INDUSTRIAL



Architects and engineers like these flooring specifications because they mean a satisfactory, long-lasting, durable floor that satisfies their clients.



Building contractors like them, because Mastic Floors made with Flintkote Flooring Emulsion are laid easily and quickly . . . either for work areas, ramps and platforms, or as underlayment for decorative flooring.



Management likes these industrial asphalt Mastic Floors because they are equally efficient either for new construction or for re-surfacing. Their ability to take heavy moving or standing loads assures efficiency without undue wear. Because Mastic Floors heal themselves of minor scars and rutting, and because they're easy to patch and repair, maintenance costs are low. And *cold* mastic "stays put" . . . does not "push" as *hot* laid mastic sometimes does.



The warmth and resilience of Mastic Floors made with Flintkote Flooring Emulsions provide an ideal "working surface," with plenty of foot-comfort for standing operators. Get complete details and specifications on this modern industrial flooring, and specify flooring that will please everybody. Write us for full information and application data.

The Flintkote Company of Canada, Limited, 30th Street, Long Branch, Toronto 14. Sales offices in: Vancouver, Calgary, Edmonton, Winnipeg, Toronto, Montreal, Sackville, N.B., and Charlottetown.






## fluorescent ballasts

Users of fluorescent lighting realize more than ever that a fluorescent lighting installation can be no better than its ballast. The ballast must be designed to forestall early end-blackening of the lamp. It must have long life itself, and it must assure rated life and proper operation of the lamp, and other fixture components.

General Electric ballasts are designed, built, and tested for permanent, matched characteristics—dependable performance.

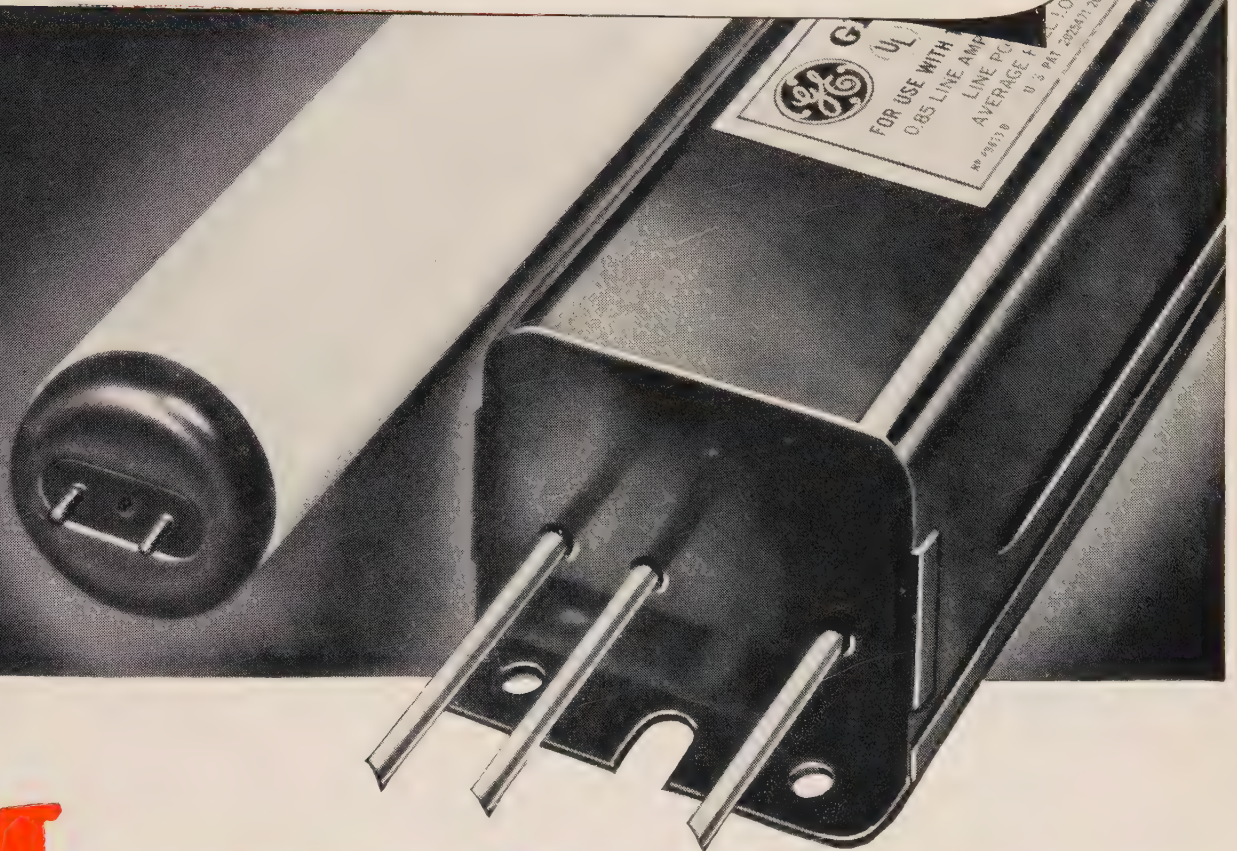


# Matched Performance

## makes good fixtures better

Yes, the matched performance of General Electric ballasts with any standard fluorescent lamp can help a lot in making good fixtures better performers—and in bringing you repeat sales. These "lamp-matched" ballasts assure your customers rated light output, rated lamp life, and maximum operating efficiency and all-around satisfaction.


48-HF-2

**BALLASTS • CABLE • LAMPS  
STARTERS • LAMPHOLDERS  
for DEPENDABILITY  
in fluorescent lighting**



**CANADIAN GENERAL ELECTRIC CO. LTD.**  
HEAD OFFICE — TORONTO



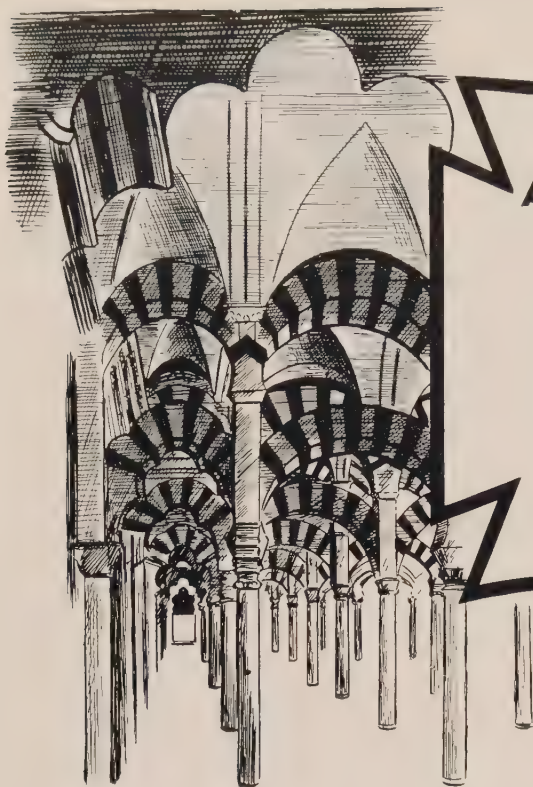

## A STONE FOREST OF COLUMNS . . . 1,000 YEARS OLD

In Cordova, Spain, there stands this masterpiece of Moorish masonry. Begun by Moslem invaders more than 1,100 years ago and formerly a Mosque, it was once Islam's largest shrine, except for the Kaaba at Mecca. Above the 850 pillars, black and white stones form countless graceful arches under which the Moorish Caliphs of Spain once strolled. To-day, it is a Christian Cathedral.

## *for modern masonry* MEDUSA STONESET

Waterproofed through and through, Medusa StoneseT assures a strong, lasting bond by making the entire wall watertight. It prevents stain from back-up and deterioration of masonry caused by water penetration, followed by freezing. Medusa StoneseT has, indeed, none of the deficiencies of ordinary mortar. It doesn't shrink and has far less volume change than any other white cement.

With Medusa StoneseT there is no unsightly efflorescence. This makes possible the maintenance of absolute uniformity of colour in the mortar joints of stone and brick structures, to which it gives much greater stability and endurance. StoneseT is ideal also for laying brick and its low cost makes feasible its use throughout the wall.

4-48




56 YEARS OF CONCRETE PROGRESS

# MEDUSA STONESET

MEDUSA PRODUCTS COMPANY OF CANADA LIMITED  
PARIS                      ONTARIO



*You're always right... with* **CRANE**

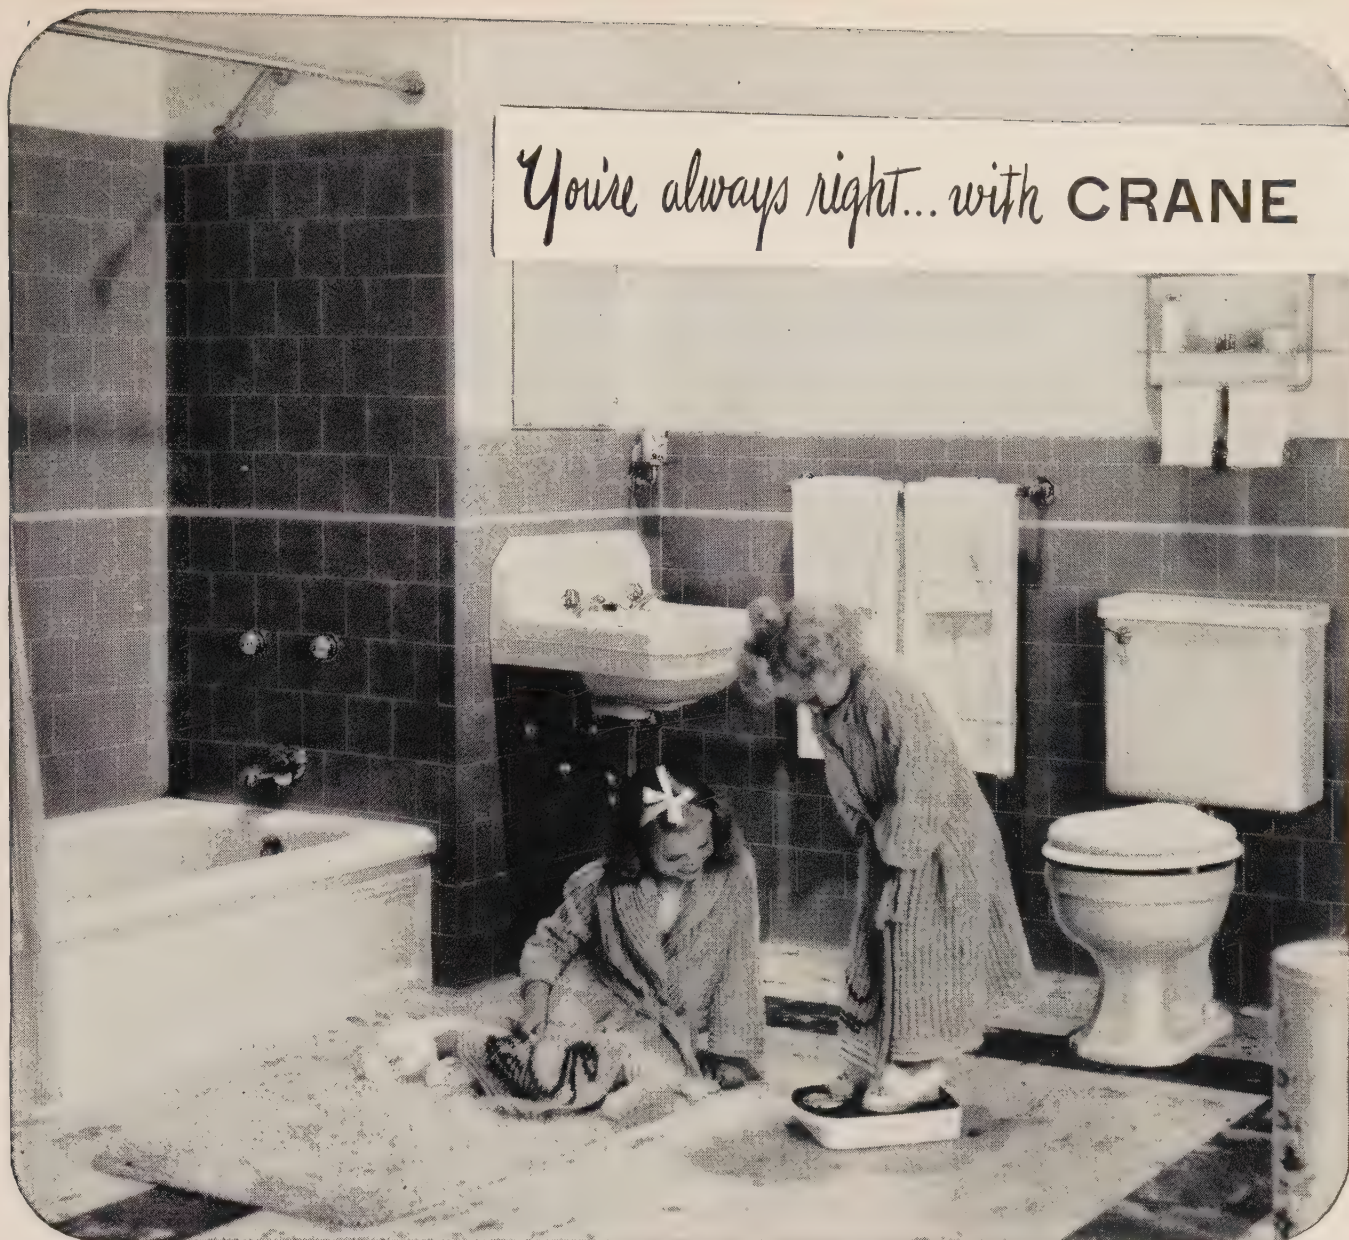

*In choosing Crane you know that many factors confirm your choice...*

**CRANE IS CORRECT**

... Correct in styling to complement good room design. Crane offers a right style for every taste—a right price for every building budget.

**CRANE IS COMPLETE**

... The extent and variety of the Crane line provides everything to please the most exacting client. Crane quality is expressed in the lasting gleam of the finish... the dependable service... such *extra* features as finger-tip *Dial-ese* controls.

**CRANE IS PREFERRED**

... Throughout Canada Crane is recognized as the name that assures the highest standards of quality in plumbing.

*The*

unvarying high quality of Crane bathroom fixtures, trim and fittings extends to Crane sinks and laundry equipment, too. You'll find it also in the full line of heating equipment... for hot water, warm air or steam... for coal, coke, oil or gas.

*Check*

your requirements with your Crane Branch or wholesaler.

**CRANE**  
LIMITED

General Office: 1170 Beaver Hall Square, Montreal  
18 Branches in Canadian Cities and Newfoundland



# Designed...




Aerial view of Edmonton

## SAVOY DESIGN

A graceful design taken from the Louis XIV School. Suitable for homes, apartment buildings, hotels, etc. Of cast bronze or brass.

## WINDSOR DESIGN

Distinctive English Gothic design, suitable for homes, hotels, schools, etc. Of cast bronze, brass or iron.

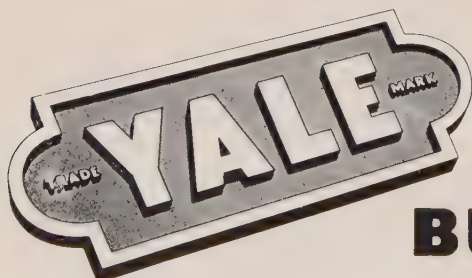

## TO HARMONIZE WITH YOUR PLANS

Whatever the design, the building you are planning will be enriched by Yale hardware. For Yale can provide the suitable hardware accessories, the finishing touches that mean architectural perfection. Every piece of Yale hardware is designed by skilled craftsmen to meet the varied requirements of the architect. The extensive range permits the widest selection.



Aerial view of Montreal  
Photos courtesy CNR

## BUILDERS' HARDWARE


THE YALE & TOWNE MANUFACTURING COMPANY (CANADIAN DIVISION), ST. CATHARINES, ONTARIO



Available in Canada for the first time!

# ARMSTRONG'S BLOXOLITE

## PLASTIC PARTITION

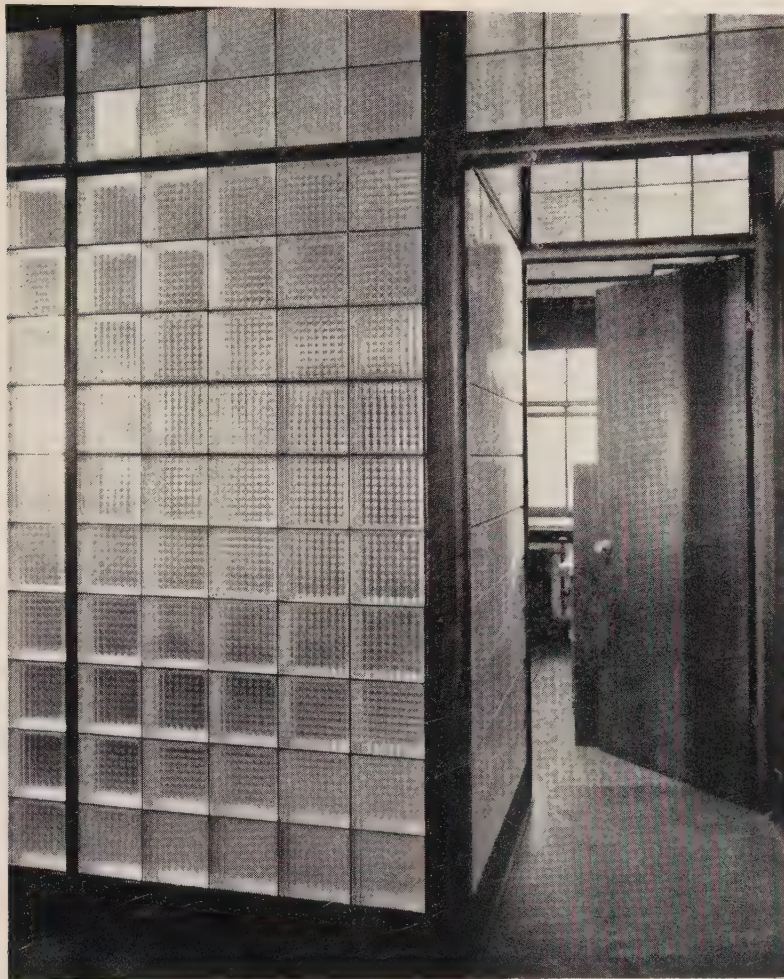

AS the simple way to a brighter and more cheerful place to work, Armstrong's BLOXOLITE plastic partition represents the latest contribution to modern office construction. Easy to erect and economical, BLOXOLITE transforms a dull and drab office into one of brightness and beauty.


The partition consists of a framework of interlocking wood strips forming cells which are faced with plastic plates\*. This construction results in a light yet sturdy partition which appears to be made up of a series of translucent blocks.

Although BLOXOLITE is ideally suited for office partitions, its numerous unique features suggest many other residential and commercial uses.

\*The plastic material used is Styron, developed by Dow Chemical of Canada Limited.

### Armstrong's BLOXOLITE plastic partition offers these advantages:

- LIGHT IN WEIGHT** Assembled plastic blocks, though structurally strong, weigh less than one pound per 8-inch unit.
  - TRANSLUCENT** Plastic material used is scientifically molded for excellent light transmission while diffusing the "view" and affording privacy.
  - EASY TO ERECT** Partition can be quickly and easily erected by any carpenter. No masonry mortar, pointing compound or adhesive is necessary.
  - RE-USABLE** Partition also can be easily dismantled and reassembled with complete salvage of all materials.
  - NOISE-REDUCING** Sound resistance ranges between that of lath and plaster and a quarter-inch wall of solid plate glass.
  - DURABLE** Plastic used is Styron; it will not absorb moisture, crack, warp, expand or contract.
- WRITE FOR DESCRIPTIVE FOLDER**—For further detailed information and installation instructions, write for free illustrated folder.

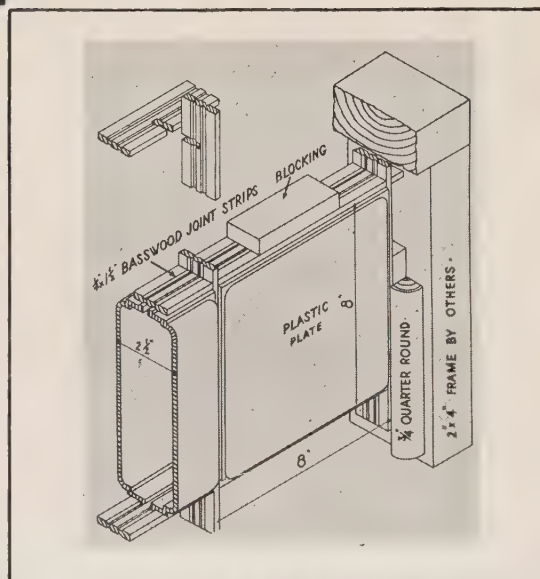

## ARMSTRONG CORK CANADA LIMITED

Floor Division

6911 DECARIE BOULEVARD, MONTREAL, P.Q.

SAINT JOHN, N.B.

• QUEBEC


• TORONTO

• WINNIPEG

• VANCOUVER



# *Vickers-Keeler* **BOILERS**

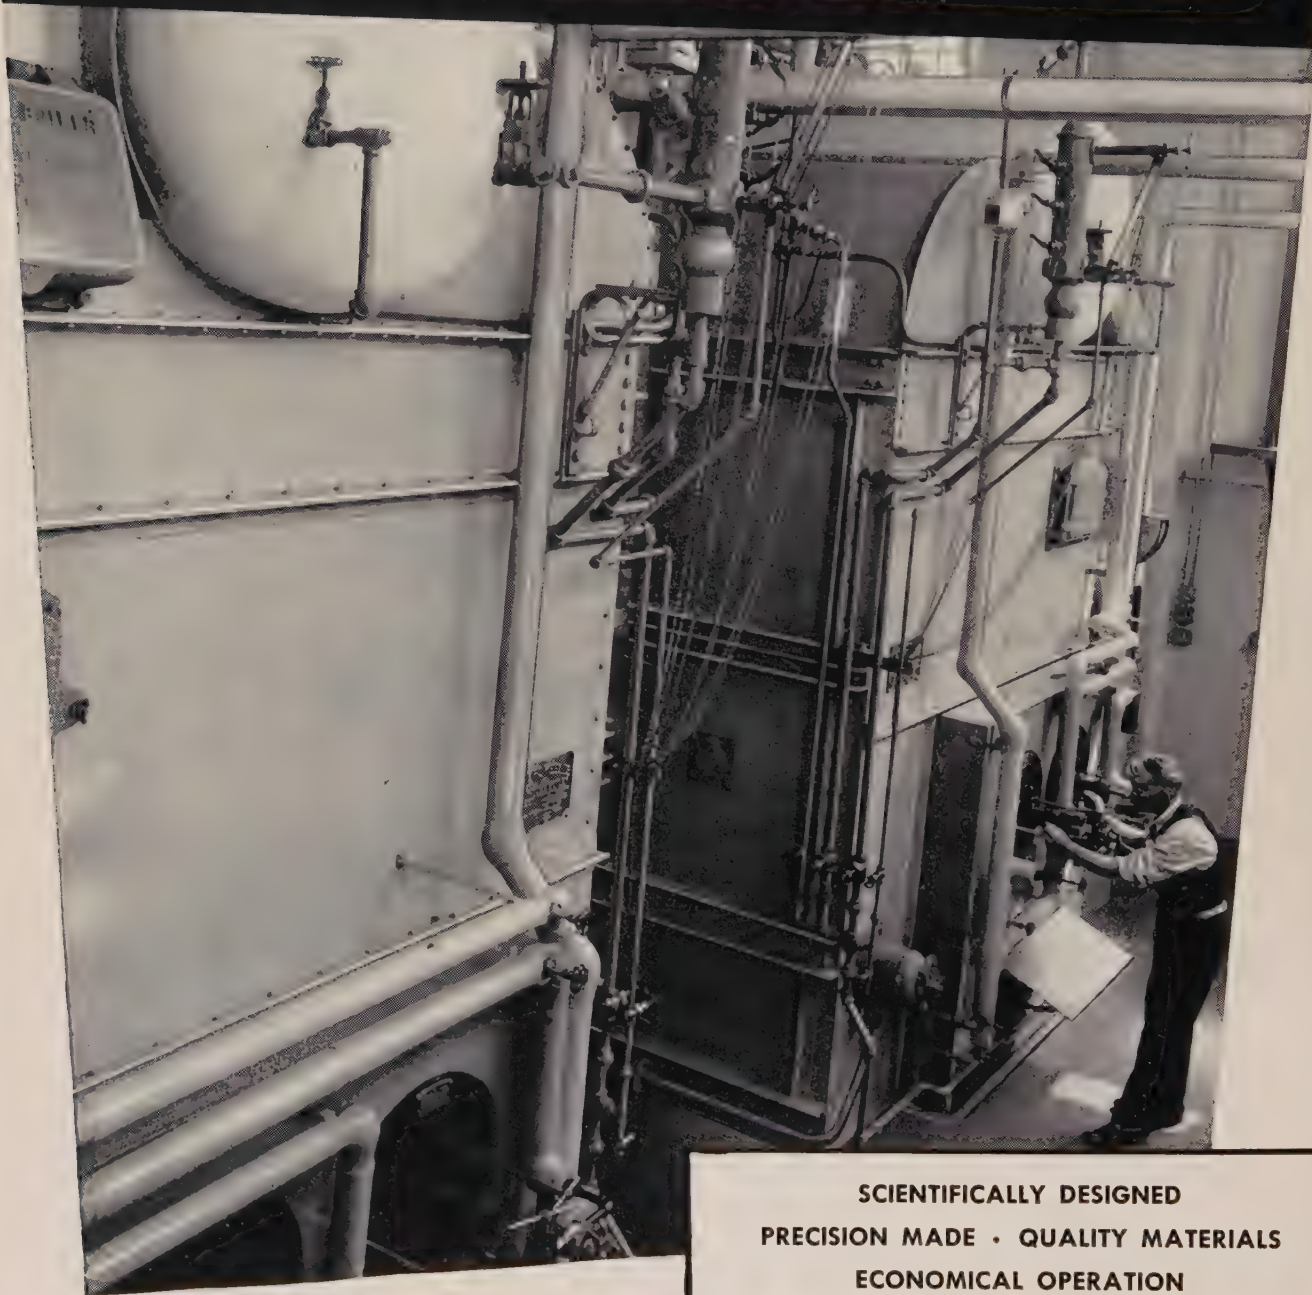

*A typical installation of a battery of  
Vickers-Keeler Boilers in the Power House of  
the Municipal Yards of  
the City of Montreal, Quebec.*


**SCIENTIFICALLY DESIGNED  
PRECISION MADE • QUALITY MATERIALS  
ECONOMICAL OPERATION**





**IF YOU DON'T  
BELIEVE IT...**

*Add up  
your Valves*

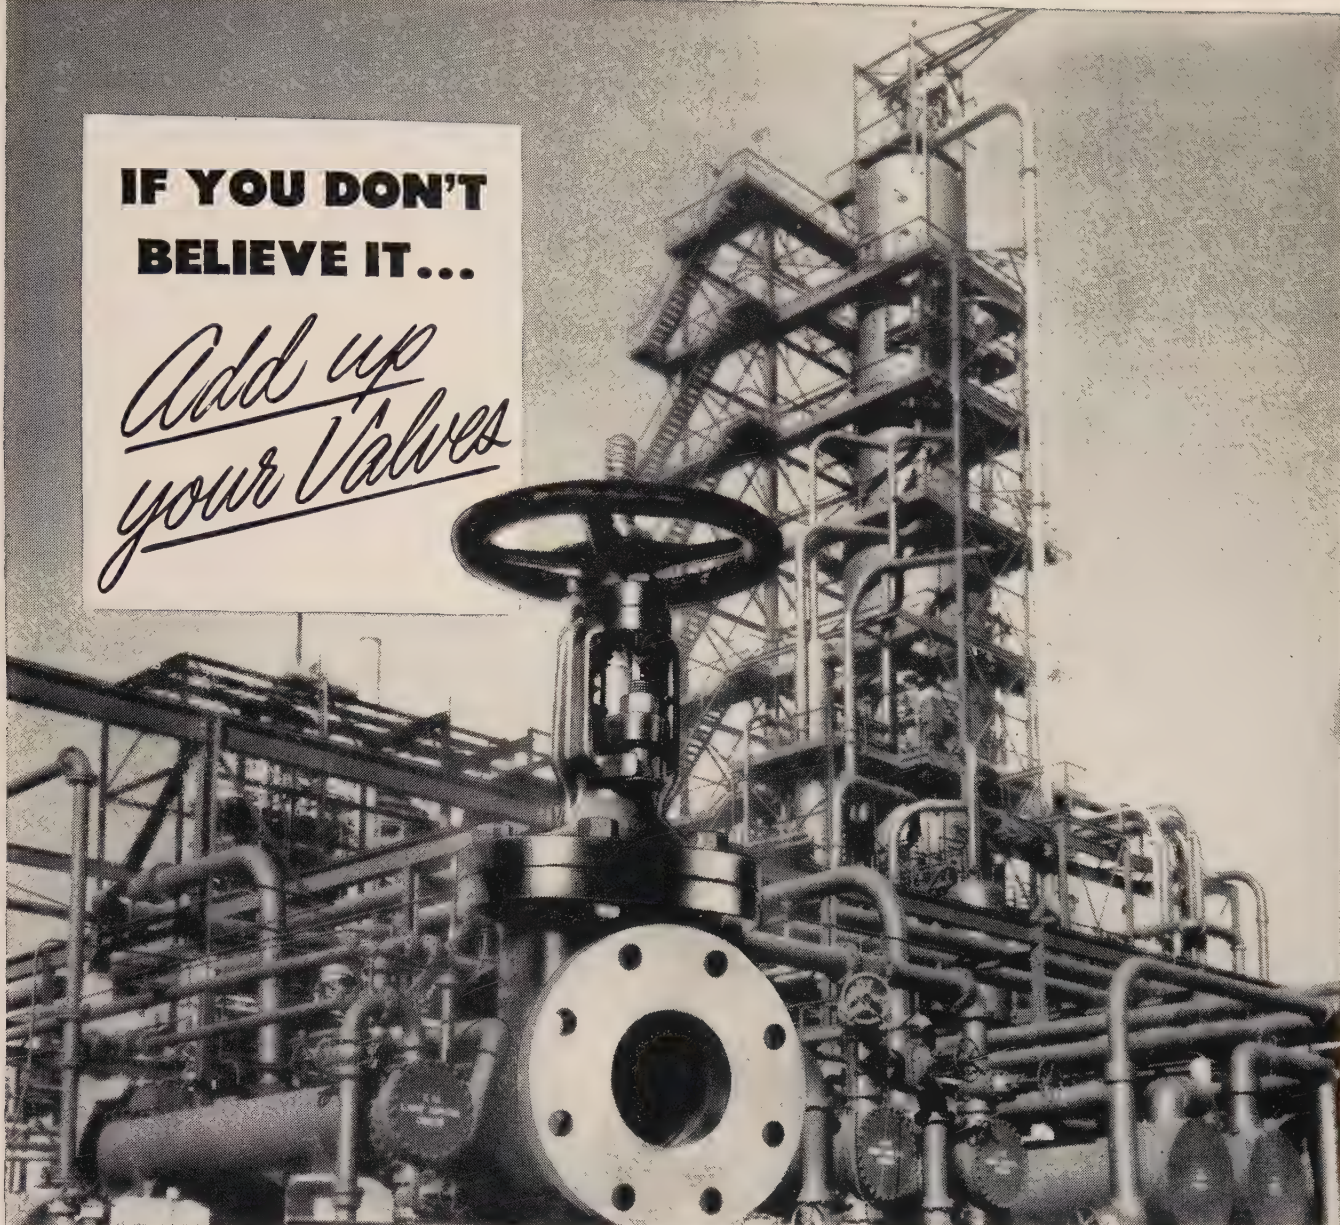

No . . . there never was a valve this big. But if *all valves* in this refinery were *one valve*, this picture would be no great exaggeration.

Today, with wages and material costs the highest ever, it pays to think about valves collectively, and keep the same sharp eye on valve maintenance costs that you do on large unit maintenance.

EXCESSIVE MAINTENANCE of one valve is insignificant, but multiplied by thousands, it is a serious drain on operating budgets.

JENKINS BROS. LIMITED  
617 ST. REMI STREET • MONTREAL

Sales Offices:  
TORONTO, WINNIPEG,  
VANCOUVER



JENKINS BROS. LIMITED helps you meet this problem two ways. First, by building extra endurance into Jenkins Valves, making them the longest-lasting, lowest-upkeep valves that money can buy. Second, with advice from Jenkins Engineers on any question of proper selection, installation, or maintenance.


For all new installations, for all replacements, rely on Jenkins quality and engineering for lowest valve costs in the long run. *Sold through leading Industrial Distributors.*

**JENKINS VALVES**

For industrial, engineering, marine and power  
plant service . . . in Bronze, Iron, Cast Steel  
and Corrosion-Resisting Alloys.



“We’ve turned  
our backs on  
Heating worries  
*FOR GOOD!*”

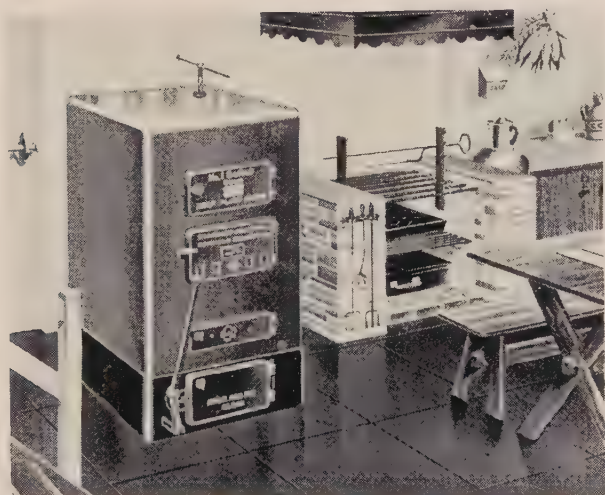

DoRad Boiler — available for coal or oil



Master Pembroke Bath, Compact Water Closet and  
Brainard Lavatory



One sure way to settle your heating problems for good is to buy heating equipment made by “Standard”-Dominion. For it is scientifically designed and constructed to give you the utmost in comfort and economy through many years to come. In the “Standard”-Dominion line you’ll find a size and a type of heating equipment to fit your own requirements for radiator heating, for coal, gas or oil.

For modernization work now Time Payments may be arranged through our affiliated Company — Heating and Plumbing Finance Limited.

*Consult your Plumbing and Heating Contractor for Complete Details*

MADE IN CANADA FOR CANADIANS BY

**Standard Sanitary & DOMINION RADIATOR**  
TORONTO, CANADA LIMITED

**SPECIFY**  
**“Standard” PLUMBING FIXTURES • DOMINION HEATING EQUIPMENT**



**For Kitchen  
Work Surfaces that  
STAY Beautiful...**

Use **G-E TEXTOLITE**  
**SURFACING MATERIAL**



● Handsome and decorative, General Electric Textolite is a rugged plastics surfacing material in sheet form. Because of its laminated construction, it withstands shock. Food acids and household chemicals won't mar it. Even a pan filled with hot lard won't blister its smooth surface.

It pays to use G-E Textolite to dress up "working surfaces" on tables and counters you build. You can be sure your equipment will *keep* its good looks and give *outstanding* service under the most severe conditions.

Versatile Textolite is available to you in colors and patterns to blend with any decorative scheme. Write for the interesting *new booklet* which shows Textolite patterns *illustrated in full color*. It's free! Just drop us a line, or use the coupon.



● Here's kitchen beauty that really lasts... with tough G-E Textolite table and counter tops that resist wear—stay colorful and attractive for years.

**CANADIAN GENERAL ELECTRIC**  
Chemical Division, Supply Dept.,  
212 King St., W. Toronto 1.

Send me a free copy of "Textolite  
Decorative Surfacing Materials for  
Table and Counter Tops."



Name .....  
Business.....  
Address .....  
City.....Prov..

48-MD-3

**CANADIAN GENERAL ELECTRIC CO LTD**  
HEAD OFFICE - TORONTO




# GYPTEX

## TEXTURE PAINT




### 1 — Brush It On

Mix the GypTex with lukewarm water to a heavy free-working paste and apply a liberal coat to the surface with a brush.

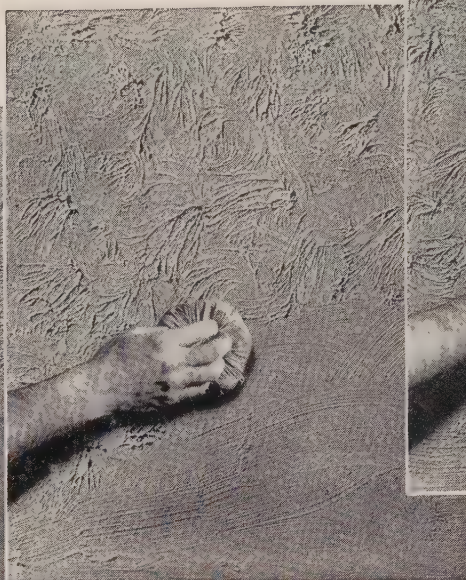

### 2 — Pat With Sponge

Texture the applied material with a newspaper sponge, allowing a light patting motion to coincide with a slight twist of the hand. Form an irregular pattern breaking up the entire area as illustrated.

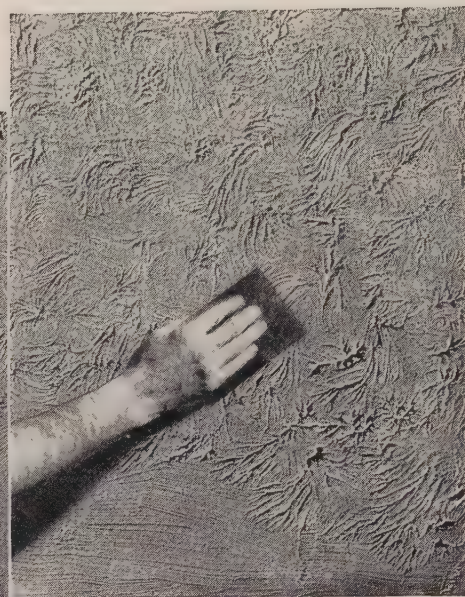

### 3 — Flatten High Points

If desired, high points of a texture may be smoothed off with a GypTex flattener — a piece of celluloid about 5 inches square. This should be done after the applied material stiffens slightly but before it sets. The flattener should be dipped in water and lightly drawn over the textured surface without excessive pressure.

## *Difficult Decoration Problems*

It is often difficult to obtain a uniform appearance when refinishing walls and ceilings in alteration jobs. GYPTEX TEXTURE PAINT offers an ideal solution to this problem.

New wallboard partitions and existing plaster surfaces can be made alike, by decorating them with GYPTEX. No matter what repairs and patching may be required in old plaster, the full-bodied coating of GYPTEX will effectively cover and conceal variations in colour and minor surface irregularities. The types of textures pos-

sible with GYPTEX are unlimited, and being hand formed, are entirely free from monotony.

After GYPTEX is applied no further decoration is necessary because it is made in a range of tints; the one coat therefore provides both colour and decoration. Where it is desirable, GYPTEX can be made washable by applying a sizing or sealing coat followed by a good quality oil paint.

The ease and speed with which GYPTEX can be applied make its use extremely economical. Covering capacity approximately 7 sq. ft. per pound in a texture of average weight.

**Gypsum, Lime and Alabastine,  
Canada, Limited**

VANCOUVER

CALGARY

WINNIPEG

TORONTO 5

MONTREAL 2



# ARCHITECTURAL Concrete



**FOR BEAUTY AND ECONOMY . . .**



*Owners: Canadian National Institute for the Blind. Building: Home for the Blind - Saskatoon. Architects: Webster and Gilbert, Saskatoon. Contractor: Piggott Construction Company - Saskatoon. Completed: 1948 - Spring.*

**T**ODAY, more than ever before, architectural concrete is being specified for the construction of apartments, hospitals, schools, offices and industrial buildings. The reason for this growing demand is the substantial and continuing saving on this versatile material. Architectural concrete cannot burn or decay (low maintenance) . . . structural and ornamental parts can be cast in one operation (reduces construction costs) . . . is easily molded to create beautiful buildings large or small. Remember, over the years architectural concrete saves as it serves.

We welcome enquiries on the use of architectural concrete . . . write today.

4902


## CANADA CEMENT COMPANY LIMITED

Canada Cement Company Building - Phillips Square Montreal

Sales Offices at: MONTREAL - TORONTO - WINNIPEG - CALGARY



# Beauty Like This Makes Friends for Life

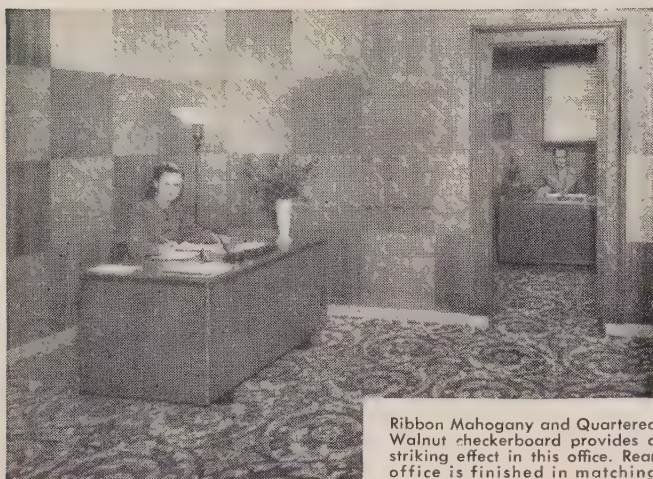

Ribbon Mahogany and Quartered Walnut checkerboard provides a striking effect in this office. Rear office is finished in matching Quartered Walnut, sheer hung.

Dress up your offices and public rooms with the rich, restful beauty of real wood.

Use Flexwood to create a luxurious, inviting background that will attract new popularity and profits.

Guests love the distinctive charm of Flexwood interiors. They will come back again and again to your restaurants and cocktail lounges, made bright and sophisticated with Flexwood walls.

Flexwood is real wood, made pliable by a patented process, and permanently bonded to a fabric backing.

Install Flexwood quickly and easily over existing surfaces. It fits with any decorative scheme . . . retains its good looks and good taste indefinitely. It's easy to keep clean, and requires only a minimum of maintenance.

Write for free information and samples.

*Canadian Representative*


**PAUL COLLET & COMPANY**

Laurentien Hotel, Montreal, Que.

## *Distributors*

Jalbert & Sayer, 736 Granville Street, Vancouver, B.C.  
Victor Equipment Limited, 445 Main Street, Winnipeg, Man.  
Walter L. Brown Wallpapers, 47 Yonge Street, Toronto, Ont.  
Roper Agencies Limited, 91 Dresden Row, Halifax, N.S.

**flexwood**

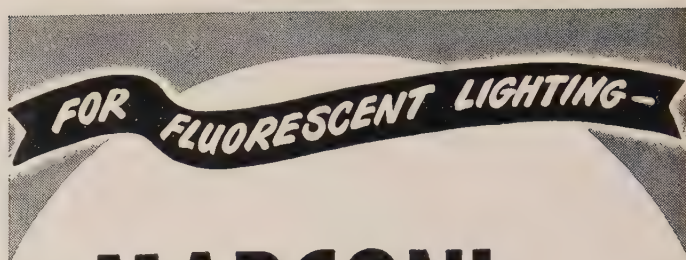

# MARCONI

## BALLAST units



MARCONI Ballast Units are quick starting . . . last longer . . . have "flicker control" . . . and are "hum-free" due to a special vacuum process. Yes . . . for trouble-free performance, ease of installation, electricians everywhere prefer and demand GENUINE MARCONI BALLAST UNITS.

If you want to be right the first time . . . specify Marconi Ballast Units . . . they are always dependable.

*For further information and illustrated booklet, phone or write your nearest Marconi sales office.*

**CANADIAN MARCONI COMPANY**

*Established 1903*

**MARCONI BUILDING • • • MONTREAL**

Vancouver • Winnipeg • Toronto • Halifax • St. John's, Nfld.



# FOR SKILLED HANDS


*... a powerful tool!*

The technical and artistic achievements of our modern world have this in common—they are born of the pencil point.

Engineer, artist, architect, draftsman, designer and student—all rely upon the drawing pencil to transfer their ideas onto paper, their visions into reality.

VENUS Drawing Pencils are engineered to give you drawing and drafting perfection. They are accurately *graded* to assure uniformity in all 17 degrees . . . *strong* in performance . . . *smooth* and *clean* in action.

THE DRAWING PENCIL WITH THE GREEN CRACKLE FINISH

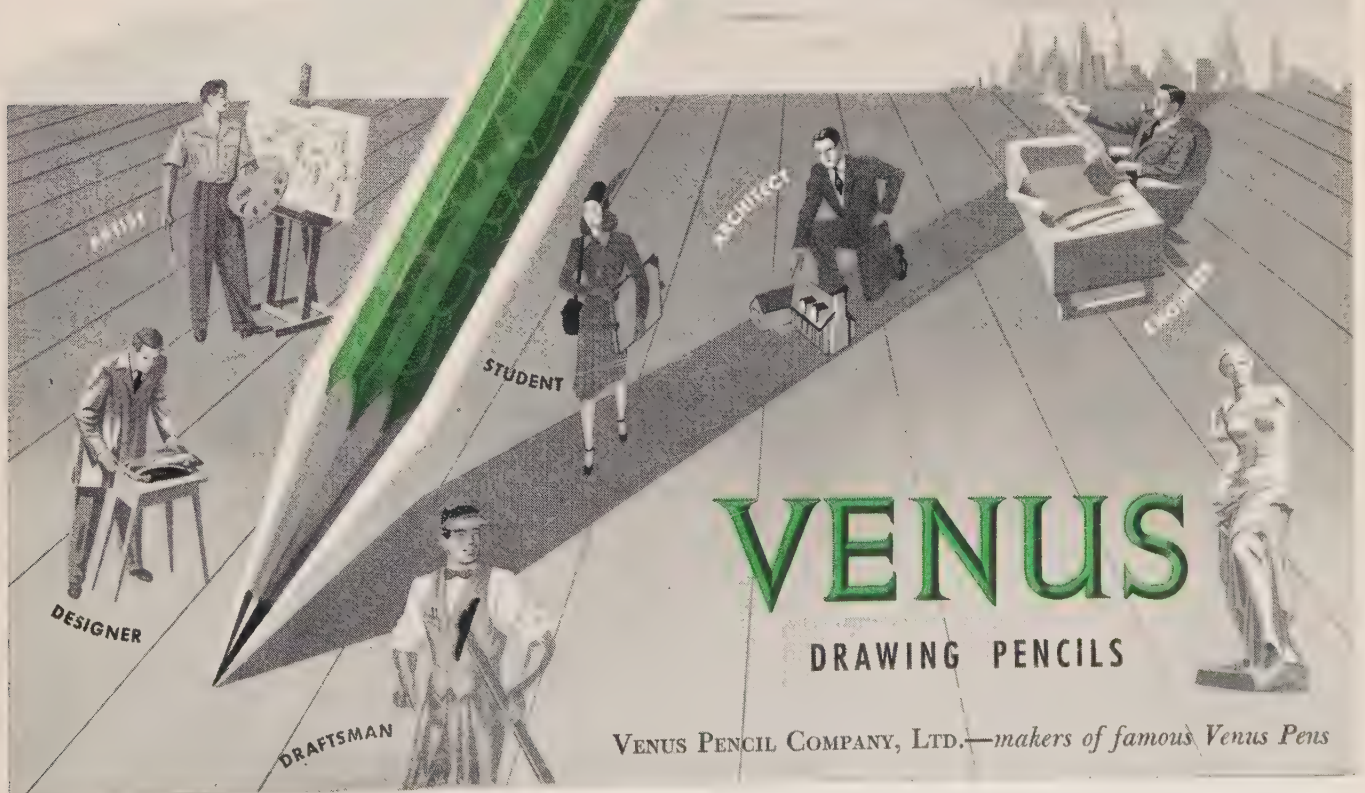

VENUS PENCIL COMPANY, LTD.—makers of famous Venus Pens





## ONTARIO ASSOCIATION OF ARCHITECTS 1949 CONVENTION and ANNUAL MEETING

FRIDAY & SATURDAY  
JANUARY 21, 22, 1949

ROYAL YORK HOTEL  
TORONTO



MACAMIC SANATORIUM, MACAMIC, QUE.

PIERRE RINFRET & ETIENNE BEGIN  
Associated Architects, Quebec, Que.



SIMARD & FRERE, CIE, LTÉE.  
General Contractors, Amos, Que.

## MITCHELL-CLERK INSULATED ALUMINUM WINDOWS

glazed with Mitchell, breather-type, THERMOSASH double  
glazing panels, will be installed in this modern institution.

THE ROBERT MITCHELL CO., LIMITED • MONTREAL





## FIAT *Skipper* SHOWER

● For sound, increasing profits and added goodwill, tell your customers about the FIAT Skipper Shower Cabinet.

With the Fiat, householders can enjoy all the convenience and luxury of a fine quality shower at amazingly low cost. The pre-fabricated design makes installation quick and easy. Side walls are reversible, permitting

**SPECIFICATIONS:** Size 32 x 32 x 76.  
**Walls:** Heavy gauge aluminum sheet, finished in baked-on white enamel.  
**Accessories:** Polished Chrome Valves with renewable seats; self-cleaning shower head; soap dish; strainer plate; Neptune Shower Door (with deluxe Skipper); Shower Curtain (with standard Skipper).

location of valves and accessories on right or left hand.

Styled for gleaming beauty . . . incorporating many new structural features ordinarily found only in higher priced showers . . . the Fiat Skipper Shower Cabinet will introduce a new standard of "low cost luxury" into your customers' homes.

Available is *Skipper DeLuxe Shower Cabinet* equipped with the famous aluminum alloy frame Neptune Shower Door and *Skipper Standard Shower Cabinet* equipped with curtain.

*Fiat Skipper Shower Cabinets and Doors are available to the trade through leading Plumbing Wholesalers.*

MANUFACTURED UNDER CONTRACT AGREEMENT WITH FIAT METAL MANUFACTURING COMPANY, U.S.A.

485

**PORCELAIN AND METAL PRODUCTS LIMITED**

ORILLIA



CANADA





## ***LIGHT*** ***on your Grating Problems***

The problem of selecting a suitable grating is simplified by the many advantages of M-M Safety Gratings. Various load conditions are met by adjustments in the depth and spacing of carrying members, and the components are firmly interlocked to eliminate rivets and bolts. These non-slip gratings provide excellent light transmission and are designed to suit YOUR requirements in ANY size.

Available in fixed, movable and hinged units for indoor or outdoor use, with treads for fire-escapes and stairs, M-M Safety Gratings have proved their value in a wide variety of uses throughout the Dominion.

*M-M Products are manufactured at the Toronto plant of Dominion Bridge Co. Ltd., 1139, Shaw Street.*

# **M-M Safety Gratings**

*Write for Catalogue T100*



**Divisions:** WAREHOUSE, STRUCTURAL, BOILER, MECHANICAL, PLATEWORK.

**Plants at:** VANCOUVER, CALGARY, WINNIPEG, TORONTO, OTTAWA, MONTREAL,

**Assoc. Companies at:** EDMONTON, SAULT STE. MARIE, QUEBEC, AMHERST.






# *Brick & Tile*

*FOR Mellowing Beauty*

**BRICK & TILE MANUFACTURERS ASSOCIATION**  
OF CANADA

57 BLOOR STREET WEST • TORONTO 5, ONTARIO



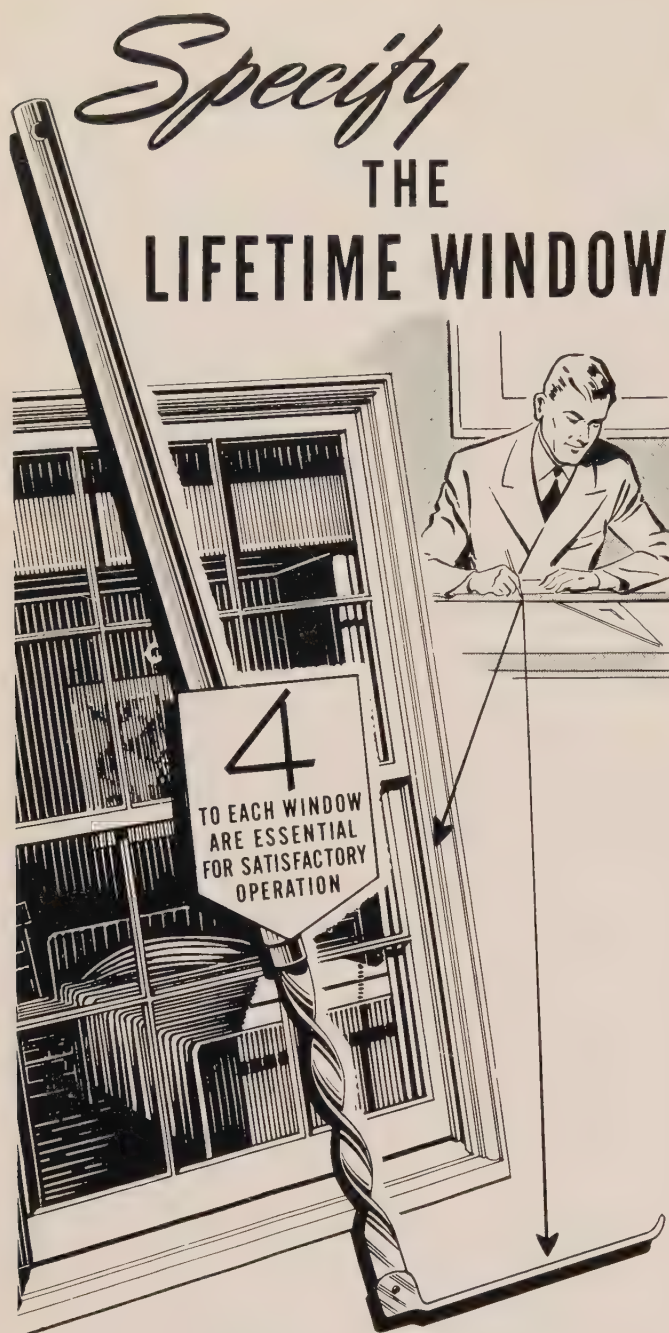

BEAUTIFUL "Narroline" multiple windows, featuring the Unique Spiral Sash Balance and "fingertip-pressure" operation, allow the architect more freedom of design and to specify at the stroke of a pencil exterior and interior beauty, more sunlight, increased angular vision, controlled circulatory ventilation. There is nothing to get out of order. "Narroline" windows and Unique Sash Balances last the lifetime of the building.


Millmen and lumber dealers all over Canada manufacture "Narroline" windows in all sizes, and can supply them equipped with Unique Spiral Sash Balances in both upper and lower sash ready for installation.

Over 45,000,000 Unique Sash Balances are now serving homeowners daily.


Specify four Unique Sash Balances - two for top and two for bottom sash. Half a window can only do half a job.

**UNIQUE  
SASH BALANCE COMPANY  
LIMITED**

604 DE COURCELLES STREET  
MONTREAL, QUE.



## R. E. Bolton's Modern Quebec Home Has RADIANT HEATING

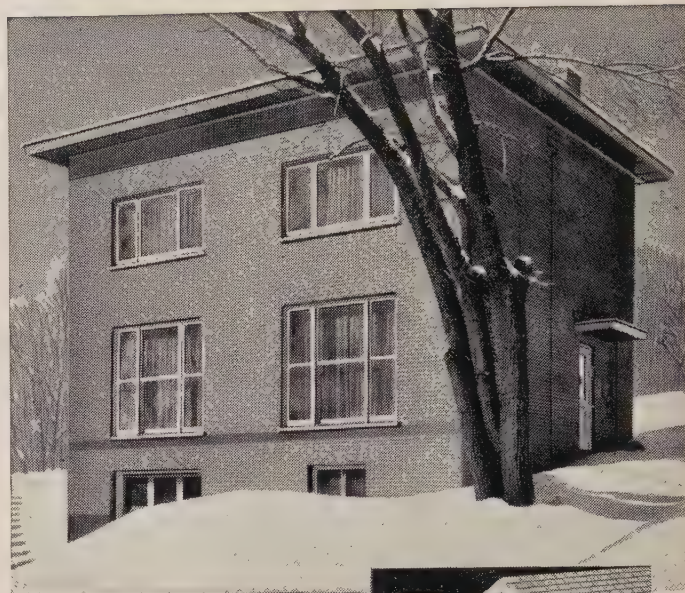

**Owner:** Mr. R. E. Bolton, 4325 Montrose Ave., Westmount, Que.

**General Contractor:** James Thom and Co. Limited, Montreal, Que.

**Heating Contractor:** John Watson & Co. Limited, Westmount, Que.

**Architects:** Fetherstonhaugh, Durnford, Bolton & Chadwick, Montreal, Que.

**Consulting Engineers:** Wiggs, Walford, Frost & Lindsay, Montreal, Que.

**Pipe:** Supplied by Crane Limited, Montreal, Que.

**Type of Pipe:** Page-Hersey Continuous Weld Steel.



For comfort, cleanliness and completely unobstructed floor areas, Radiant Heating is the answer.


Whether ceiling or floor installation is adopted, or a combination of both as shown above, the heating system is always completely hidden.

For life-long satisfaction with Radiant Heating most architects and heating engineers specify Page-Hersey Continuous Weld Steel Pipe.

Every length is scale-free, rust-resistant, and uniform. Extra ductility insures smooth, pressure-tight bends; and the extra degree of toughness resists fracture and distortion, when bending or welding.

For lowest cost and lifetime satisfaction

**SPECIFY**

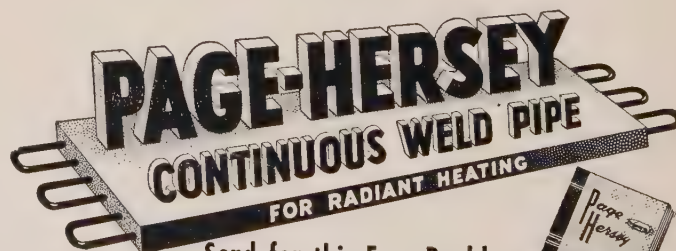


Send for this Free Booklet

It covers the most recent information on the application of Page-Hersey Continuous Weld Pipe for radiant heating in all types of buildings. Detailed and illustrated.

PH-14A

**PAGE-HERSEY TUBES LTD.** 100 CHURCH ST., TORONTO, CANADA  
Branches - Vancouver - Winnipeg - Montreal - Halifax  
THE LARGEST MANUFACTURERS IN CANADA OF PIPE AND TUBULAR PRODUCTS, WELDED AND SEAMLESS





Our Yuletide Greetings  
remain as warm and sincere  
as they have been for more  
than 100 years

TO YOU AND YOURS  
FROM ALL OF US  
BEST WISHES  
FOR A  
MERRY CHRISTMAS  
AND A  
HAPPY AND SUCCESSFUL  
NEW YEAR

*Gurney*

THE GURNEY FOUNDRY COMPANY LIMITED


TORONTO • MONTREAL • WINNIPEG • VANCOUVER



End the  
danger  
of  
Scalding  
Showers!

Install

## POWERS THERMOSTATIC SHOWER MIXERS



Only One Moving Part

*They are safe  
both ways!*

Bathers can really relax and enjoy the best shower they ever had if the temperature is regulated by Powers.

There is no danger of scalding... no slipping and falling while trying to dodge an unexpected shot of hot or cold water.

Being *thermostatic*, Powers Mixers give *two way* protection... against *pressure changes* caused by use of nearby showers, flush valves and faucets... and against *temperature changes* in water supply lines.

Cut fuel and water bills with Powers Mixers. Bathers waste no time or hot and cold water while waiting for a shower at the right temperature. *Phone or write our nearest office for Circular H547.*

THE POWERS REGULATOR CO.,  
OF CANADA LTD.

198 Spadina Ave., Toronto, Ont. Offices also in Montreal,  
Winnipeg, Vancouver, Calgary and Halifax

948

# POWERS

THERMOSTATIC SHOWER MIXERS

# NO FLICKER

(NOT EVEN ON 25 CYCLES)



WHEN YOU INSTALL

## COLD CATHODE

## E. L. RUDDY COMPANY'S IMPROVED FLUORESCENT LIGHTING

And this Lighting also offers you these three OTHER IMPORTANT ADVANTAGES:

1. INSTANT STARTING—no starters, no ballasts.
2. LONG LAMP LIFE—up to 7,000 hours.
3. NO SHADOW, NO GLARE—soft, uniform diffusion of light.

E. L. Ruddy Company's *Cold Cathode Fluorescent Lighting* has C.E.S.A. approval and is giving the *utmost* satisfaction in Commercial, Institutional and Industrial Buildings.

*Be SURE you're right when choosing light*

CONSULT

**E.L. RUDDY CO. LIMITED**

TORONTO

MONTREAL

HAMILTON

In Windsor, De Mers Electric

5F-48



# THE WONDER WOOD OF 1000 USES • MASONITE PRESDWOOD

Worked easily with carpenters' tools

Can be bent permanently to curved designs

Resists moisture permanently—no tendency to warp

Great structural strength

Takes almost any applied finish

Can be sawed, planed, routed, beveled, laminated

Won't split, splinter, snag, dent or corrode




Presdwood quickly and easily transforms dull, unattractive interiors—makes possible unique new streamlined effects.

**Most useful** for modernizing stores, theatres, showrooms . . . for remodeling hotels, hospitals, office buildings . . . for almost any job that challenges the skill and imagination of the architect and builder!

That's Masonite\* Presdwood—the time-tested hardboard with perhaps more valuable characteristics than any other basic material. Presdwood adds durability and beauty . . . provides quality construction. It makes possible unusual effects on curved surfaces, takes almost any kind of finish.

**Presdwood** is made from natural wood refined to a better, stronger wonder wood. Progressive lumber dealers have it—Untempered, or Tempered to extra hardness.

Send for samples, and 48-page booklet "What You Ought to Know About Masonite Presdwoods," Masonite Company of Canada Ltd., Gatineau, Que. Dept. 103.



FROM EXPLODED WOOD TO VERSATILE HARDBOARD



THE LEADING HARDBOARD

# MASONITE PRESDWOOD




\*Masonite is a registered trade mark and signifies that Masonite Company of Canada Ltd. is the source of the product.



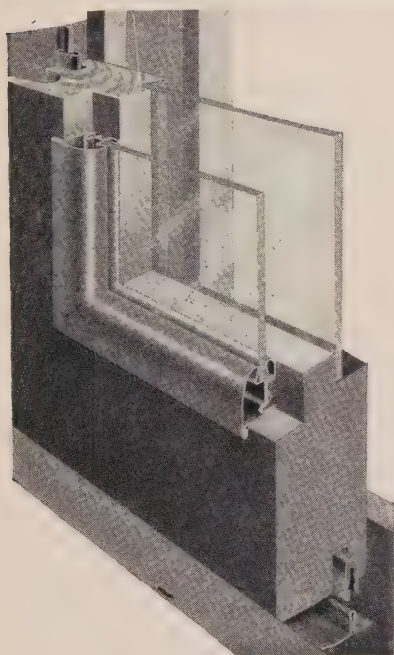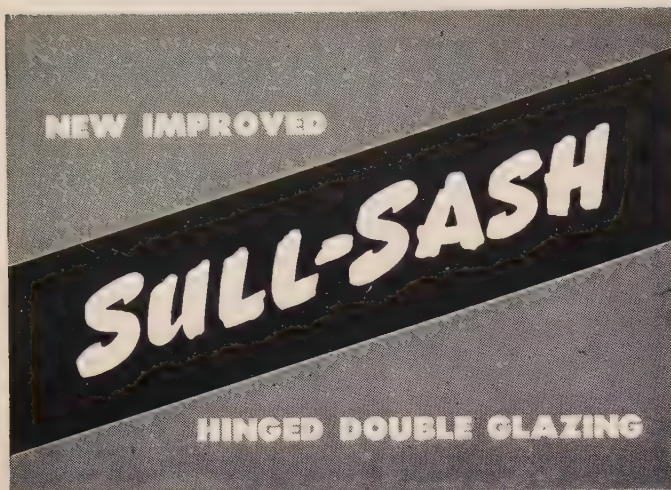

Newly designed — newly improved SULL-SASH unit provides a new standard of comfort and economy in double glazed windows. Sull-Sash makes for easier living — eliminates old-fashioned storm windows — cuts down heat losses through windows by 50%, compared to single glazing — keeps maintenance costs to a minimum.

Ask today for complete details on this new improved SULL-SASH hinged double glazed unit.

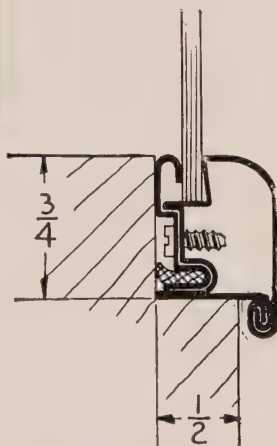

FULL SIZE view of the new improved SULL-SASH section.

NOTE: Screws may be removed to permit glazing at any time.

**CRESSWELL POMEROY**  
LIMITED

Head Office and Plant: 2150 Oxford Avenue, Montreal 28, Que.

BRANCHES

860 Kingston Road, Toronto, Ont.  
123 Cote d'Abraham, Quebec, Que.  
91 Dresden Row, Halifax, N.S.

Royal Bank Building, Winnipeg, Man.  
10306 124th Street, Edmonton, Alta.

*Now  
Available*



TRADEMARK REGISTERED

IN

**25**

**BEAUTIFUL SURFACE PATTERNS,  
STRONG, PERMANENT,  
EASY-TO-CLEAN**

FOR

*Decorative Wallboard  
Table and Counter Tops  
Electrical Panels*



Arborite is a hard-surfaced sheet material in standard panels of 4' x 8' or 2'6" x 8' which resists moisture, heat, grease, oil, alcohol, fruit juices and ordinary solvents. It is ideal for wall panels in bathrooms, kitchens, clubs, bars, and hotel and theatre lobbies. Wipes clean with a damp cloth. Will not stain or discolour.

Made in Canada

Sold by building supply and lumber dealers  
or write

**THE ARBORITE COMPANY LIMITED**  
385 Lafleur Ave., Ville LaSalle,  
MONTREAL 32, QUE.



# Merry Christmas Everyone!



**Arrow-Hart & Hegeman (Canada) Ltd.**  
Toronto - Ontario



TILE BY

*Frontenac*

ASSURES

- BEAUTY
- CLEANLINESS
- SANITATION
- ENDURANCE

FOR FLOORS AND WALLS

*Samples and full particulars available through  
Tiling Contractors or direct from us*


**FRONTENAC FLOOR AND WALL TILE CO.  
LIMITED**  
KINGSTON - - ONTARIO

*Today your  
clients look for*



## ADEQUATE WIRING

One of the first things a woman looks for in a home is adequate electrical outlets — and there is where P & S Despard Wiring Devices make their biggest hit. It's easy to sell women on these compact, easy-to-install wiring systems.

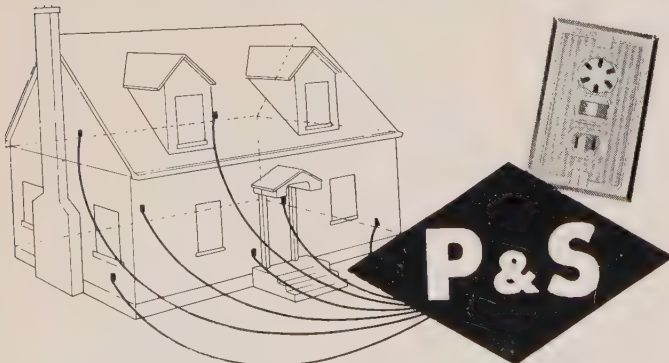

The attractive one-gang plate gives the housewife a switch, pilot light, appliance outlet or night light — or any combination — in every room.

**DESPARD  
WIRING DEVICES**

Manufactured in Canada by  
Renfrew Electric and Refrigerator Co. Ltd., Renfrew, Ont.

## WISE PLANNING DICTATES INSULATION WITH SPUN ROCK WOOL



Here's one insulation that architects can recommend with complete confidence. Long-fibred, resilient, light and easily-installed, Spun Rock Wool gives ideal cost protection — is efficient against heat, cold and sound. Vermin-proof, fire-proof, non-corrosive to metals and actually expands under vibration. That's your assurance of client-satisfaction!

Available in Bulk, Batts, Rolls, Blankets and Pipe covering.


*For samples and information, write to*

**SPUN ROCK WOOLS LIMITED**  
THOROLD ONTARIO

*Represented by:*

NORMAN A. SMITH COMPANY, 96 Vine Avenue, Toronto 9  
ASBESTOS LIMITED, 1192 Beaudry Street, Montreal

## THE NEW SHELDON UTILITY FAN

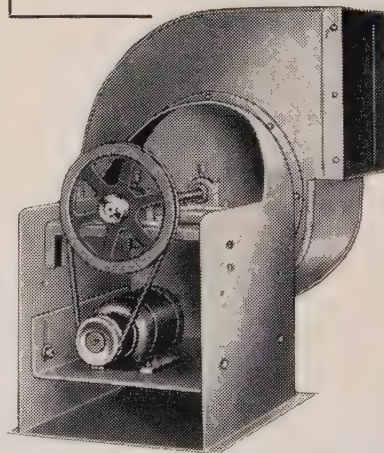

A new general purpose fan to answer the need for an all-round type of fan for a multitude of ventilation applications. Capacities range from 200 up to 10,000 c.f.m. Available with direct-connected or V-belt drive. Write today for complete details about this new Sheldon fan.

**FORCED AND INDUCED DRAFT FANS  
HEATING AND VENTILATING EQUIPMENT**

**SHELDONS**  
LIMITED  
GALT • CANADA

Toronto: 1221 Bay St.



Montreal: 738 Notre Dame W.

Representatives in: Haileybury, Winnipeg, Halifax, Edmonton, Vancouver  
Sole Export Agent: G. R. Marshall, 12 Richmond St. East, Toronto, Canada

**CANADA'S OLDEST AND LARGEST FAN MANUFACTURERS**



# Steel framework gave birth to Q-PANEL WALLS

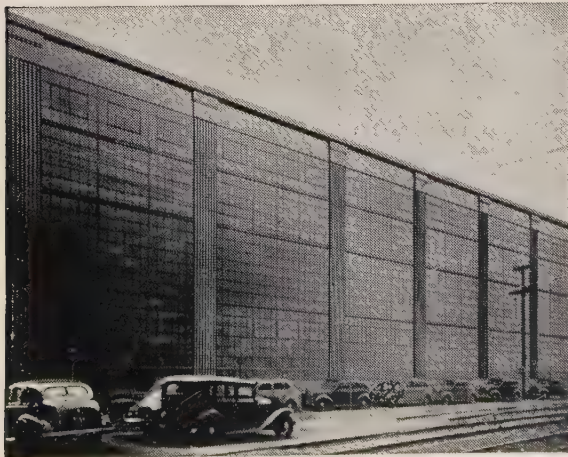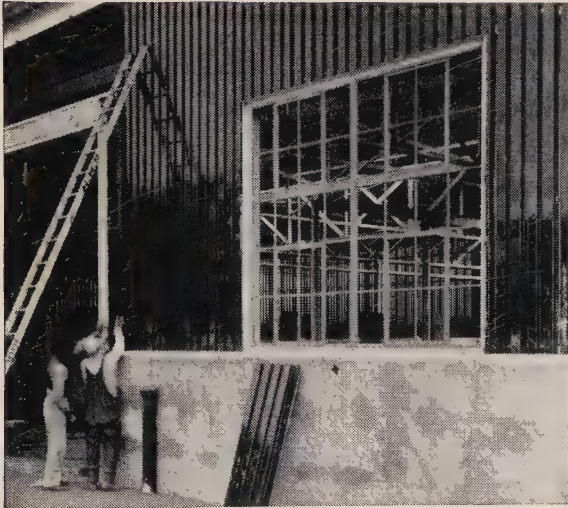

## WEIGHT

7 pounds per square foot

## INSULATION VALUE

equals 12-inch dry masonry

## ERECTION SPEED

50 square feet every 9 minutes

# Q-PANEL

Q-PANELS are wall-building units two feet wide and up to 25 feet long. They consist of a fluted section and a flat section separated by 1½ inches of insulation. Steel or Galbestos is usually used, though stainless or aluminum are frequent.

Q-Panels are delivered to the job cut to fit and are assembled on the steel framework with six bolts. So fast is construction that an acre of wall has been erected in three days.

Construction is dry, clean, noncombustible and the finished wall has thermal insulating value equal to a foot-thick, dry masonry wall.

Architects have found great leeway of expression in combinations of texture and color. Flat and fluted sections can be combined to produce striking patterns of light and shade.

Q-Panels are made by the makers of Q-Floor, the modern steel subfloor that speeds construction and provides *permanent* electrical availability. The cells of Q-Floor are crossed over by raceways for the wires of every conceivable electrical service and those not yet known. Every six-inch area of the exposed floor can be tapped for electricity, in a few minutes, without digging trenches.

*For literature on Q-Panels or Q-Floor, write Robertson Division*

## ROBERTSON-IRWIN LIMITED




TORONTO

HAMILTON  
HEAD OFFICE

MONTREAL  
8T.6



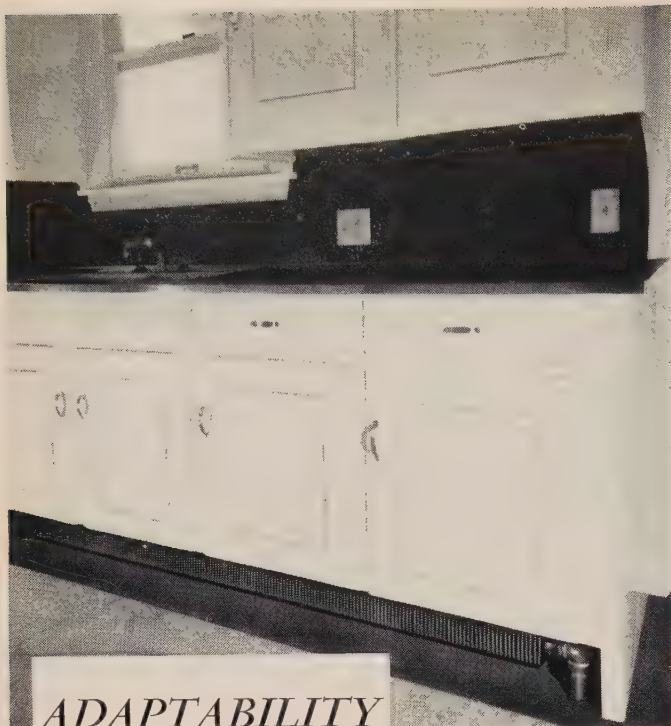


## TO MEET MODERN NEEDS

The adaptability of HEAL Fin Tube Radiation for the house has been definitely proven. A modern kitchen can be heated with a radiator which takes little space, as shown herewith. (The grille cover has been removed).

Heat is evenly diffused throughout the room, maintaining a minimum temperature difference between floor and ceiling. This standard HEAL 2" radiator, with 5.25 square feet output per lineal foot at 1 lb. steam, can be tied in with the new HEAL baseboard Radi-Vector for a complete residential installation. HEAL meets all needs for the new home . . . modernizes the present home, for either hot water or steam heating systems.

### "HEAL" FIN TUBE RADIATION

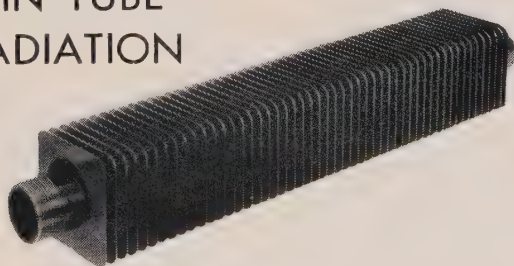

**Vapor Car Heating Co. of Canada Limited**

65 Dalhousie Street,  
Montreal

67 Yonge Street,  
Toronto 1

## Building Research

• Architects and Engineers interested in the application of research to building and associated engineering problems are invited to enquire about employment possibilities with the newly formed Division of Building Research of the National Research Council.

An enquiring mind is an essential; experience in building work in Canada is really necessary; bilingualism would be helpful.

Salaries depend upon training and experience; opportunities for useful work are unlimited. Enquiries should be addressed to:

The Director,  
Division of Building Research,  
National Research Council,  
OTTAWA



OAK PANEL DESIGNED FOR PELLER BREWING CO. LTD.

### STONE AND WOOD CARVING

by

**WM. OOSTERHOFF**  
*Estimates and Designs*

Phone 7-6068, Hamilton  
65 East 19th Street, Hamilton




Maintenance expenses are kept down at Rock Island Railroad's new Chicago shops by extensive use of Insulux Glass Block. Architects-Engineers: DeLeuw, Cather & Company.



**Glass Block reduces maintenance costs:** Insulux Glass Block is solving real problems for maintenance-conscious railroad men. Light-transmitting panels of Insulux resist the destructive effects of smoke, soot, and moisture. They require a minimum of maintenance. Real savings result.

Insulux is versatile. It transmits light, insulates, and reduces transmission of noise. Does not rot, rust or corrode. Eliminates the need of painting every two or three years.

For technical data and installation details, consult GLASS section of Sweet's Architectural Catalog, or write Dept. E-45, American Structural Products Company, P. O. Box 1035, Toledo 1, Ohio.



**INSULUX**  
**GLASS BLOCK**

AMERICAN STRUCTURAL PRODUCTS COMPANY

Subsidiary of  
OWENS-ILLINOIS GLASS COMPANY

Canadian Representatives: Consolidated Glass Limited, Toronto, Canada • Pilkington Glass Limited, Branches across Canada



# INDEX OF JOURNAL ADVERTISERS

	Page		Page
AMALGAMATED ELECTRIC CORPORATION LIMITED - - - -	19	JOHNSTON, R. E., CO. LTD. - - - - -	15
Agency: Ronalds Advertising Agency Limited		Agency: Klau-Van Pietersom-Dunlap Associates	
AMERICAN STRUCTURAL PRODUCTS COMPANY - - - -	49	MacMILLAN, H. R., SALES LIMITED - - - - -	18
Agency: Brooke, Smith, French & Dorrance Inc.		Agency: Stewart-Lovick & Macpherson Limited	
ARBORITE, THE, COMPANY LIMITED - - - - -	44	MASONITE COMPANY OF CANADA LIMITED - - - - -	43
Agency: MacLaren Advertising Company Limited		Agency: Young & Rubicam Limited	
ARMSTRONG CORK CANADA LIMITED - - - - -	27	MEDUSA PRODUCTS OF CANADA LIMITED - - - - -	22
Agency: Harold F. Stanfield Limited		Agency: McConnell, Eastman & Company Limited	
ARROW-HART & HEGEMAN (CANADA) LIMITED - - - -	45	MITCHELL, THE, ROBERT CO., LIMITED - - - - -	36
ATLAS ASBESTOS COMPANY LIMITED - - - - -	6		
Agency: Harry E. Foster Agencies Limited		NATIONAL RESEARCH COUNCIL, DIV. OF BUILDING RESEARCH - -	48
BANFIELD, ARNOLD, AND COMPANY - - - - -	Third Cover	NORTHERN ELECTRIC COMPANY LIMITED - - - - -	12
BARRETT, THE, COMPANY LIMITED - - - - -	3	Agency: Harry E. Foster Agencies Limited	
Agency: J. Walter Thompson Company Limited		ONTARIO ASSOCIATION OF ARCHITECTS, 1949 CONVENTION	
BELLEVILLE-SARGENT & CO. LIMITED - - - - -	17	AND ANNUAL MEETING - - - - -	36
Agency: Alford R. Poyntz Advertising Limited		OOSTERHOFF, WM. - - - - -	48
BRICK & TILE MANUFACTURERS' ASSOCIATION OF CANADA - -	39		
BURY, ROBERT, & CO. (CANADA) LIMITED - - - - -	13	PAGE-HERSEY TUBES LIMITED - - - - -	40
Agency: Alford R. Poyntz Advertising Limited		Agency: MacLaren Advertising Company Limited	
CANADA CEMENT COMPANY LIMITED - - - - -	33	PILKINGTON GLASS LIMITED - - - - -	26
Agency: Cockfield, Brown & Company Limited		Agency: Cockfield, Brown & Company Limited	
CANADA FLUSHWOOD DOOR LIMITED - - - - -	5	PORCELAIN & METAL PRODUCTS LTD. - - - - -	37
Agency: Harry E. Foster Agencies Limited		Agency: Vickers & Benson Limited	
CANADIAN GENERAL ELECTRIC CO., LIMITED - - - -	21, 31	POWERS REGULATOR, THE, CO. OF CANADA LTD - - - - -	42
Agency: MacLaren Advertising Company Limited		Agency: Alford R. Poyntz Advertising Limited	
CANADIAN JOHNS-MANVILLE CO. LIMITED - - - - -	1	RENFREW ELECTRIC & REFRIGERATOR CO., LIMITED - - - - -	46
Agency: MacLaren Advertising Company Limited		Agency: Allan R. Sills and Company	
CANADIAN MARCONI COMPANY - - - - -	34	ROBERTSON-IRWIN LIMITED - - - - -	47
Agency: Cockfield, Brown & Company Limited		Agency: Walsh Advertising Company Limited	
CANADIAN VICKERS LIMITED - - - - -	28	RUDDY, E. L., COMPANY LIMITED - - - - -	42
Agency: MacLaren Advertising Company Limited		Agency: McConnell, Eastman & Company Limited	
COLLET, PAUL & COMPANY - - - - -	34	SARCO CANADA LTD. - - - - -	15
Agency: Harry E. Foster Agencies Limited		Agency: Klau-Van Pietersom-Dunlap Associates	
CONSOLIDATED PLATE GLASS CO. OF CANADA LTD., THE - -	4	SHELDONS LIMITED - - - - -	46
Agency: The Ardiel Advertising Agency Limited		Agency: The Ardiel Advertising Agency Limited	
CRANE LIMITED - - - - -	23	SPUN ROCK WOOLS LIMITED - - - - -	46
Agency: Cockfield, Brown & Company Limited		Agency: McKim Advertising Limited	
CRESSWELL-POMEROY LIMITED - - - - -	44	STANDARD SANITARY & DOMINION RADIATOR LIMITED - - - -	30
Agency: Harry E. Foster Agencies Limited		Agency: The James Fisher Company Limited	
DARLING BROTHERS LIMITED - - - - -	8	TRANE COMPANY OF CANADA LIMITED - - - - -	Second Cover
DOMINION BRIDGE COMPANY LIMITED (M-M DIVISION) - - -	38	Agency: E. W. Reynolds & Co., Limited	
Agency: McKim Advertising Limited		TURNBULL ELEVATOR COMPANY LIMITED - - - - -	2
DOMINION SOUND EQUIPMENTS LIMITED - - - - -	10	Agency: Alford R. Poyntz Advertising Limited	
Agency: Harry E. Foster Agencies Limited		UNIQUE SASH BALANCE COMPANY LIMITED - - - - -	40
EMPIRE BRASS MFG. CO., LIMITED - - - - -	7	VAPOR CAR HEATING COMPANY OF CANADA LIMITED - - - -	48
Agency: McConnell, Eastman & Company Limited		Agency: Stevenson & Scott Limited	
FLINTKOTE, THE, COMPANY OF CANADA LIMITED - - - -	20	VENUS PENCIL COMPANY LIMITED - - - - -	35
Agency: Alford R. Poyntz Advertising Limited		Agency: Walsh Advertising Company Limited	
FRONTENAC FLOOR & WALL TILE CO. LIMITED - - - -	46	WARDEN KING LIMITED - - - - -	16
GURNEY FOUNDRY CO., LIMITED, THE - - - - -	41	Agency: Cockfield, Brown & Company Limited	
Agency: Harry E. Foster Agencies Limited		WESTEEL PRODUCTS LIMITED - - - - -	9
GYPSUM, LIME & ALABASTINE, CANADA, LIMITED - - - -	32	Agency: J. J. Gibbons Limited	
Agency: McConnell, Eastman & Company Limited		WOOD, G. H., & COMPANY LIMITED - - - - -	Back Cover
HOBBS GLASS LIMITED - - - - -	11	Agency: J. J. Gibbons Limited	
Agency: J. Walter Thompson Company Limited		YALE & TOWNE, THE, MANUFACTURING COMPANY - - - -	24
INTERNATIONAL NICKEL, THE, COMPANY OF CANADA - - -	8, 14	Agency: Albert Jarvis Limited	
Agency: Cockfield, Brown & Company Limited			
JENKINS BROS. LIMITED - - - - -	29		
Agency: J. J. Gibbons Limited			

PRINTED BY G. A. DAVIS PRINTING COMPANY, LIMITED, 30 DUNCAN STREET, TORONTO



# Whether You Wet Your Whistle At The Bar Or Write A Letter Home To Mother . . .

Beauty Bonded  
**FORMICA**  
Reg. U. S. Pat. Off.

at Home with People  
at Work in Industry

*in Cincinnati's Terrace Plaza*



Every non-upholstered horizontal surface in the 350 guest rooms is cigarette-proof Formica. Note the window seat and "Realwood" shelf behind the day bed.



One of the newest and most startling uses of Formica is in these colorful wash-stand dressing table combinations. Architects are asking for more information. Pictorial literature is now in preparation. We invite your inquiry for "Beauty Bonded Formica for Bathrooms."

**C**repes Suzette in the Gourmet . . . a quick bite in the colorful cafeteria . . . a night cap at the bar . . . or a quiet evening in your room. No matter what your pleasure in Cincinnati's new Terrace Plaza Hotel, your activity is bound to take place within easy reaching distance of a smooth clean Formica surface.

**You'll** be whisked to the eighth floor lobby in a Formica "Realwood" paneled elevator. You'll register at a main desk of the same material. You'll eat from Formica tables, you'll drink at a Formica bar.

**Every** horizontal surface in your private guest room will be cigarette-proof Formica. You'll shave at a Formica lavatory-dressing table in your bathroom. You'll write at a beautiful built-in drop-leaf Formica desk.


**I**n short, the Terrace Plaza is a Formica show-place. Because architectural innovations are so numerous in this finest of all hotels, we are preparing full color literature that will serve as your conducted tour through the building. If you'd like a copy, we'll be happy to furnish it as soon as it comes off the press. Please order today.

Distributed in Canada by

**ARNOLD BANFIELD AND COMPANY LIMITED**  
Toronto OAKVILLE Montreal

Formica and Formica Realwood are Trade Marks registered U. S. Pat. Off. Copyright 1948 Formica, Cincinnati, Ohio



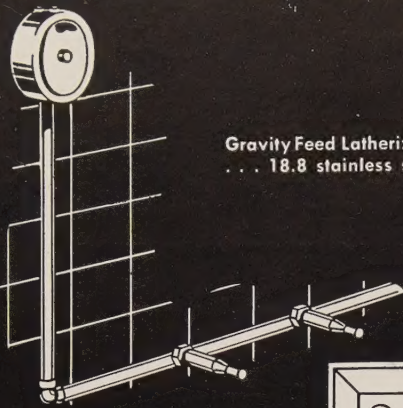

Gravity Feed Latherizing Soap Systems  
... 18.8 stainless steel valves.




Chrome-plated  
Lathurn Liquid Soap  
Dispenser with  
18.8 stainless steel  
valves provides a  
rich creamy lather.



No. 91 Liquid Soap  
Dispenser. Leak-  
proof; equipped  
with stainless steel  
valves.



No. 94 Liquid Soap  
Dispenser. Leak-  
proof; pump action;  
delivers a measur-  
ed quantity of soap  
as required.

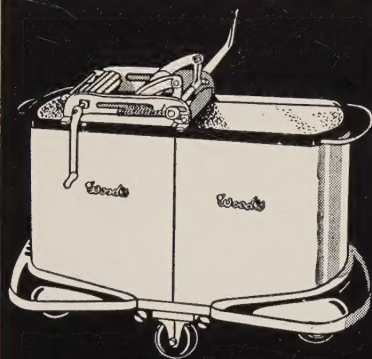


Mop Trucks and Floor Maintenance  
Equipment. This Mop Truck  
is entirely self-contained; two  
22½ gallon tanks.

# Specify


## GH Wood's SANITATION EQUIPMENT

- The best equipment for maintaining buildings in the most modern, sanitary manner.
- Wood's has 24 branches from coast to coast and 135 sanitation salesmen.
- May we submit specifications and quotations?

Floor Scrubbing and  
Polishing Machines.  
Equipped with full  
15" brushes.  
C.S.A. approved.



Self-closing,  
Fire-proof  
Waste Recep-  
tacles (with or  
without paper  
towel dispen-  
sers.) Various  
types and sizes.

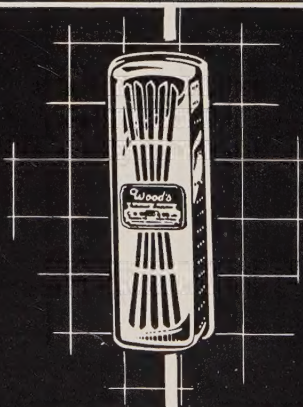

Wood's Registered Deodorizers  
will positively re-condition the  
air in public toilets and wash-  
rooms.

Wood's Electric  
Water Cooler.  
Automatic  
thermostatic  
control assures  
constant supply  
of cool water.



### G. H. WOOD & COMPANY LIMITED

MONTREAL

TORONTO

VANCOUVER

Branches throughout Canada